



# Asus X751MA-DH01TQ Web Cam Replacement

This guide should be used to help replace the Web Cam in the Asus X751MA-DH01TQ laptop.

Written By: Darren Kim



# INTRODUCTION

The Asus X751MA-DH01TQ has a built in webcam that is easy to access with this guide.



## TOOLS:


- [iFixit Opening Tools](#) (1)
- [Phillips #0 Screwdriver](#) (1)
- [Tweezers](#) (1)



## PARTS:


- [asus X751MA webcam](#) (1)

## Step 1 — Web Cam

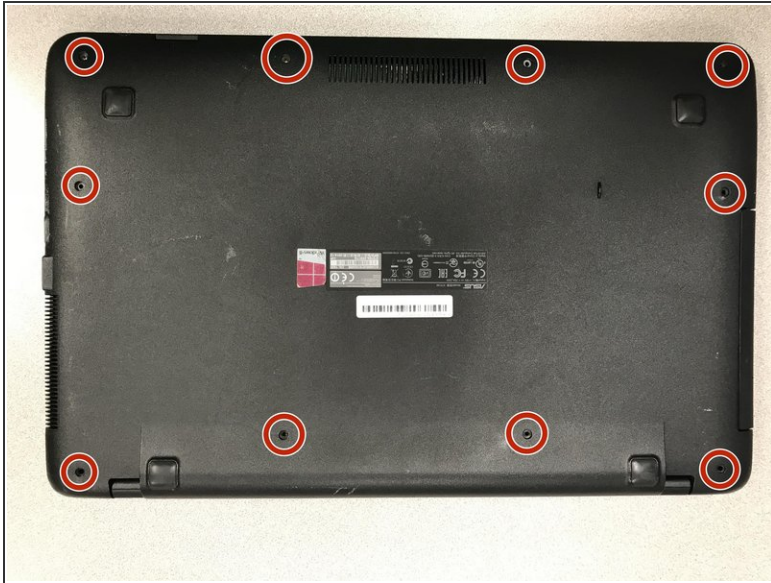

- Turn the laptop upside down and locate the ten screws that hold the plate cover.
- Remove all ten screws using a 00 Phillips head screwdriver.

## Step 2

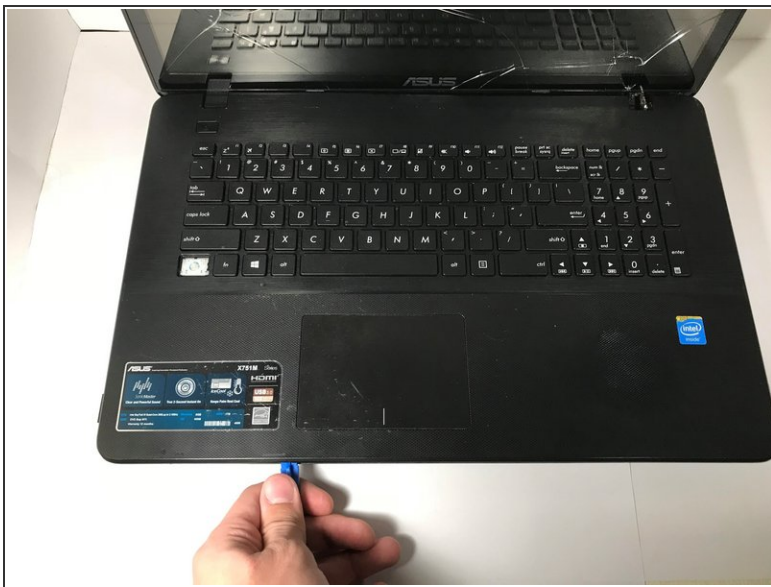

- Using the plastic opening tool, pry the keyboard off of the base of the laptop.
- Lift up and remove the keyboard.




## Step 3



- Remove eight 4.4 Phillips #00 screws attached to the hinge.


**i** Hold the screen so it won't fall over.

## Step 4

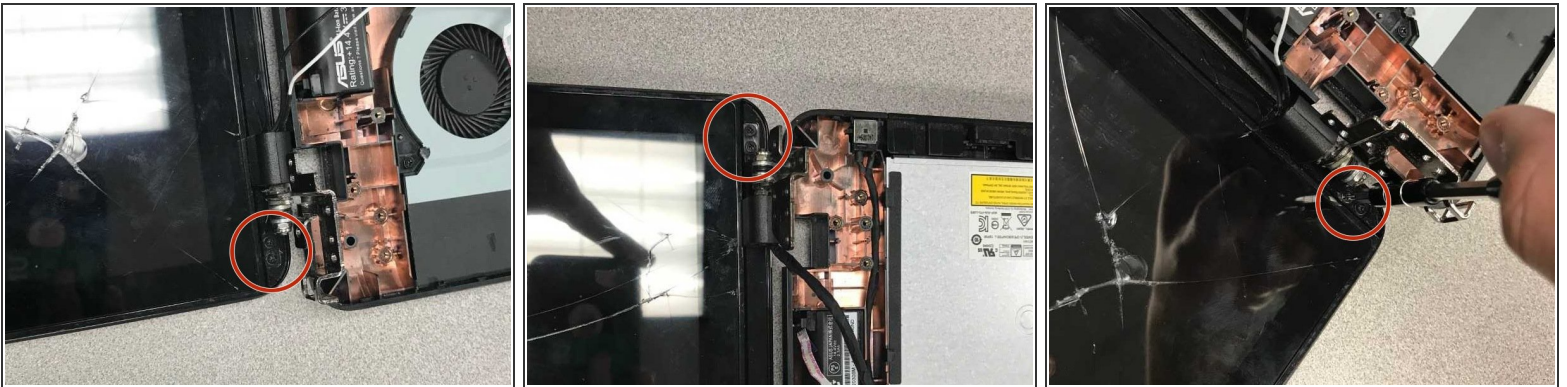



- Remove the stickers from the bottom left and right corners of the screen.
- Use a 00 Phillips head screw driver to remove the four screws.

## Step 5

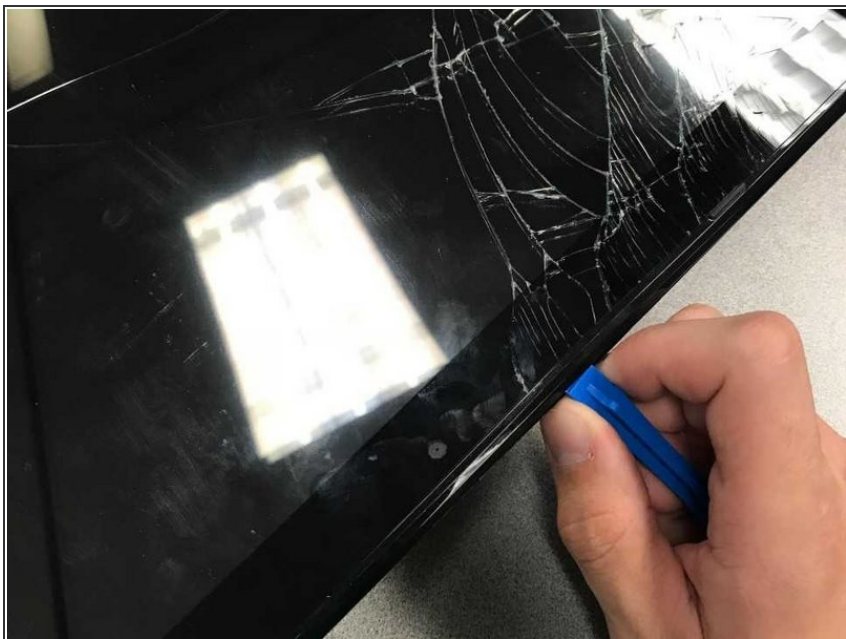

- Use the plastic opening tool to take the screen apart.


## Step 6

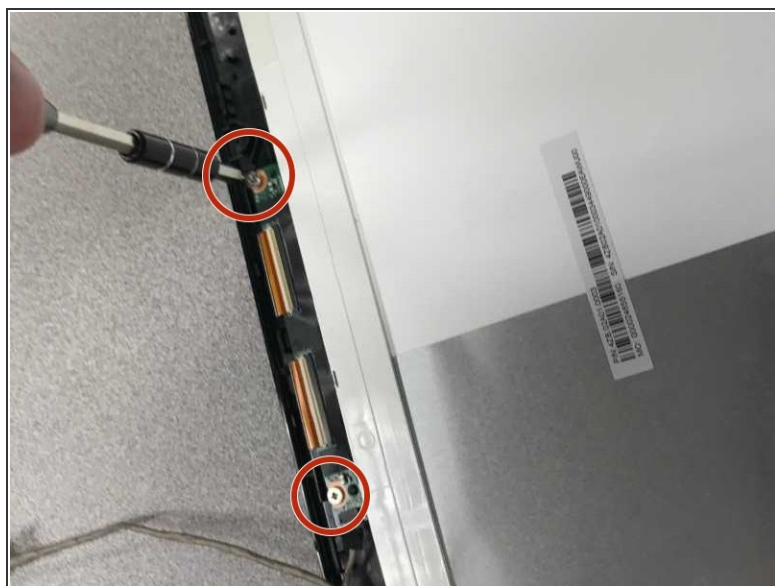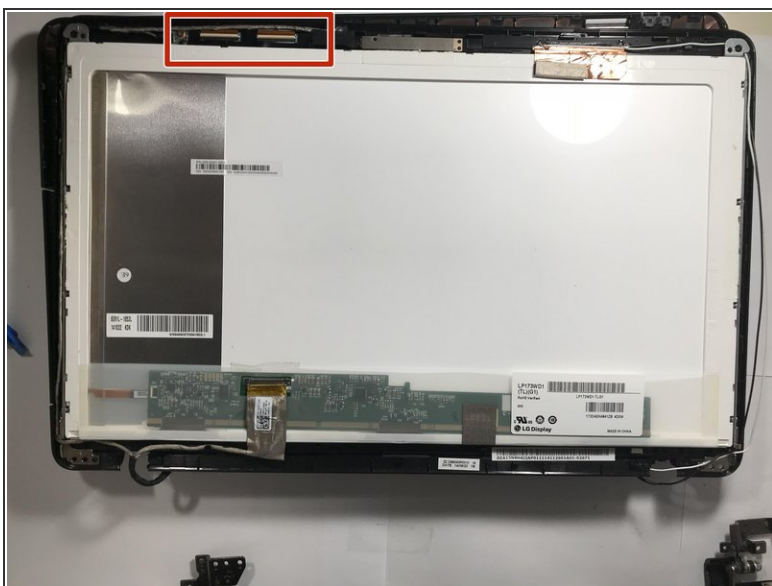

- Remove the two 4mm Phillips #00 screws attached to the webcam.




## Step 7

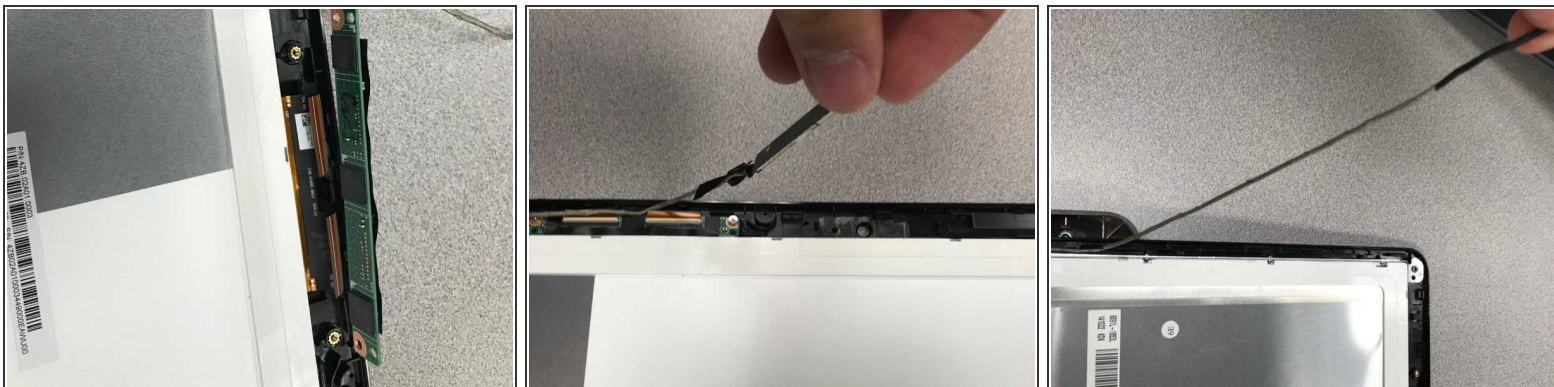


- Slowly pull up the webcam out of its slot, and begin to remove the wire.

## Step 8

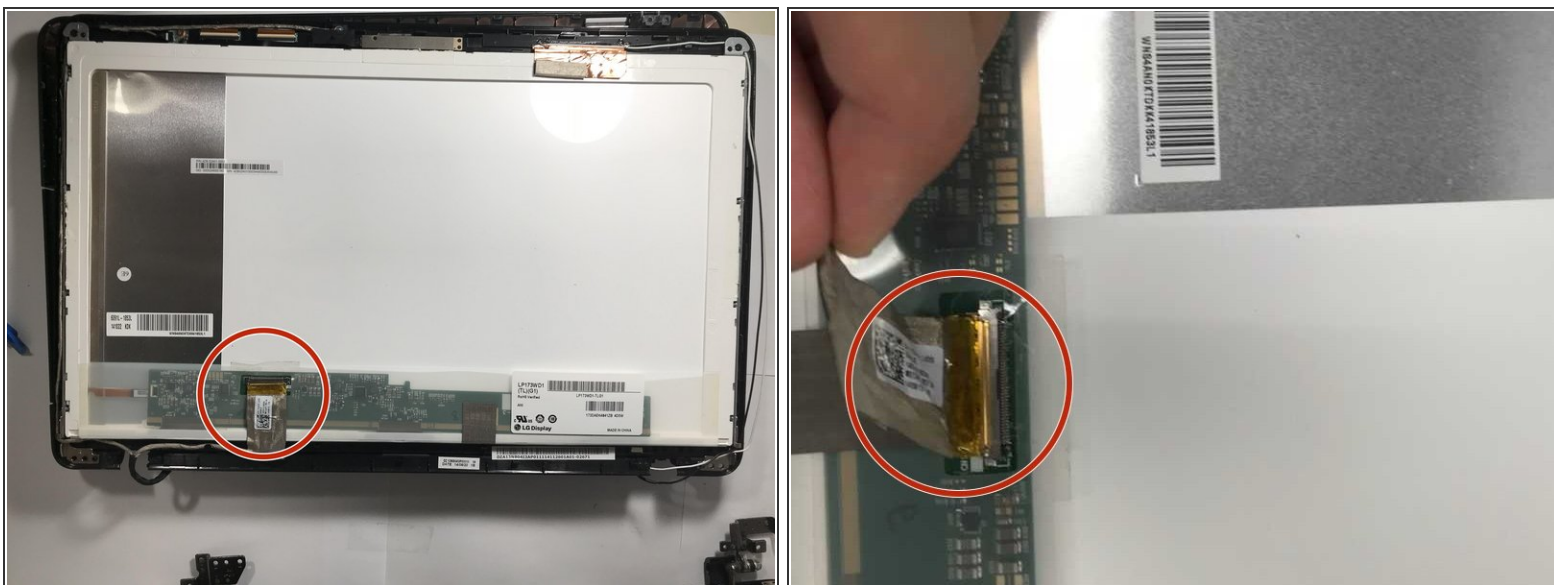

- Continue to unravel the wire and peel the webcam wire sticker off.

## Step 9

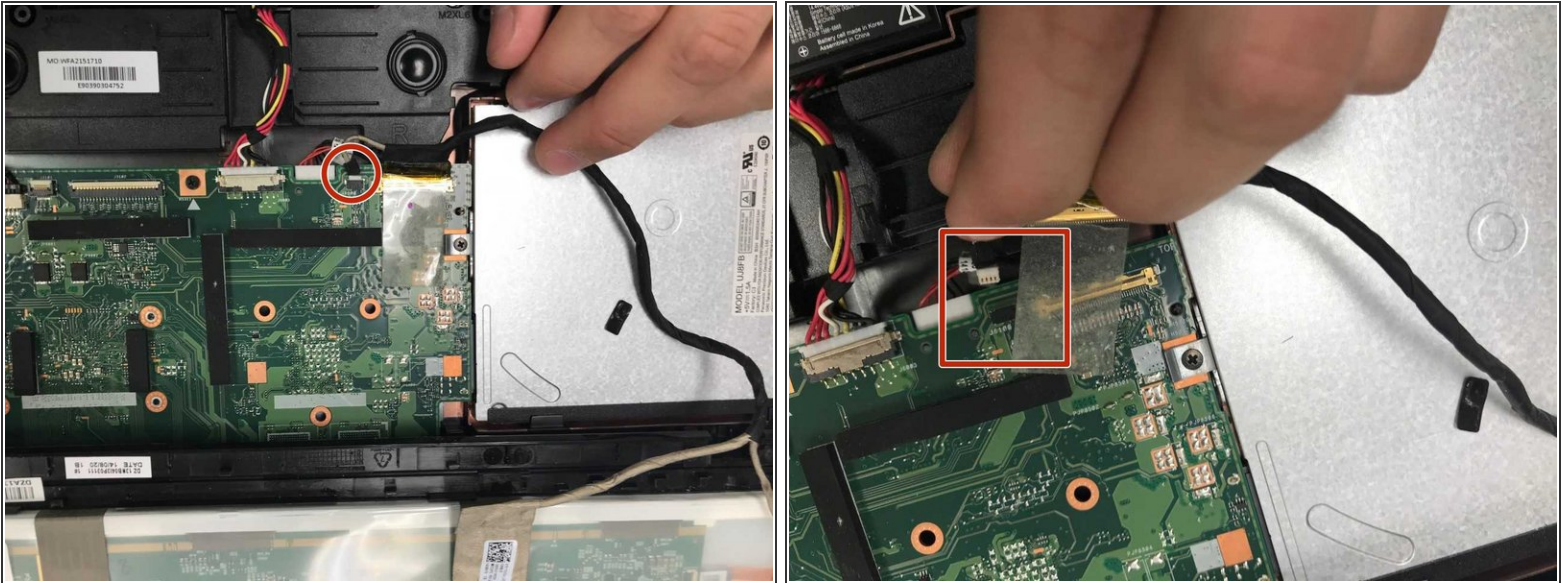

- Once the sticker is peeled off pull the plug holding the webcam into the circuit board and the webcam is now disconnected.

To reassemble your device, follow these instructions in reverse order.