




# LG V30 Plus Motherboard Replacement

Use this guide to remove the motherboard in your LG V30 Plus.

Written By: Geoffrey Smith

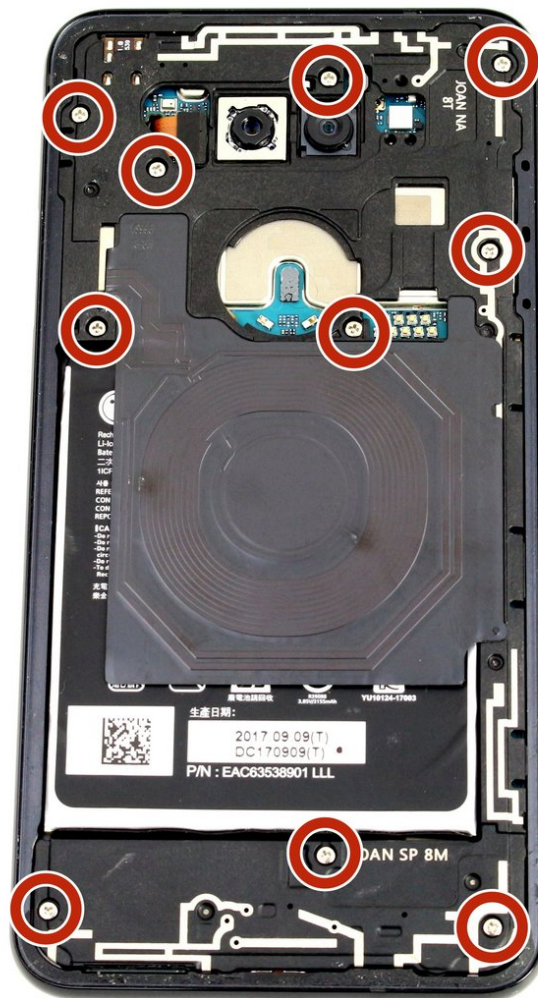

# INTRODUCTION

When your device is failing to turn on or properly function, the motherboard may be faulty. Use this guide to remove and replace the motherboard in your device.

---

## TOOLS:



- [iFixit Opening Tools](#) (1)
  - [iFixit Opening Picks set of 6](#) (1)
  - [iOpener](#) (1)
  - [Phillips #0 Screwdriver](#) (1)
  - [Suction Handle](#) (1)
-

## Step 1 — Rear Glass




- Use a pair of iOpeners by heating them in a microwave and placing the hot pads on the edges of the phone.
- Allow to sit for 1-2 minutes to heat up the adhesive.
- ❗ A heat gun may need to be used if you have trouble separating the backing in the next step.

## Step 2

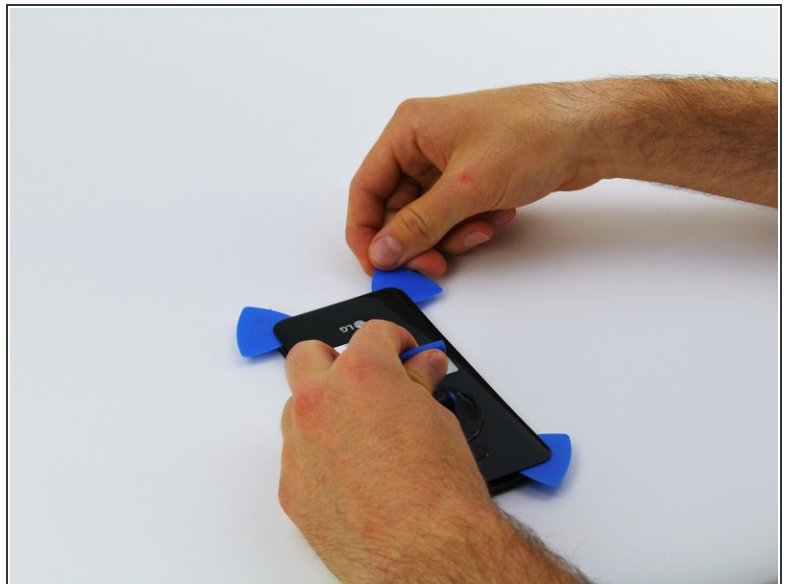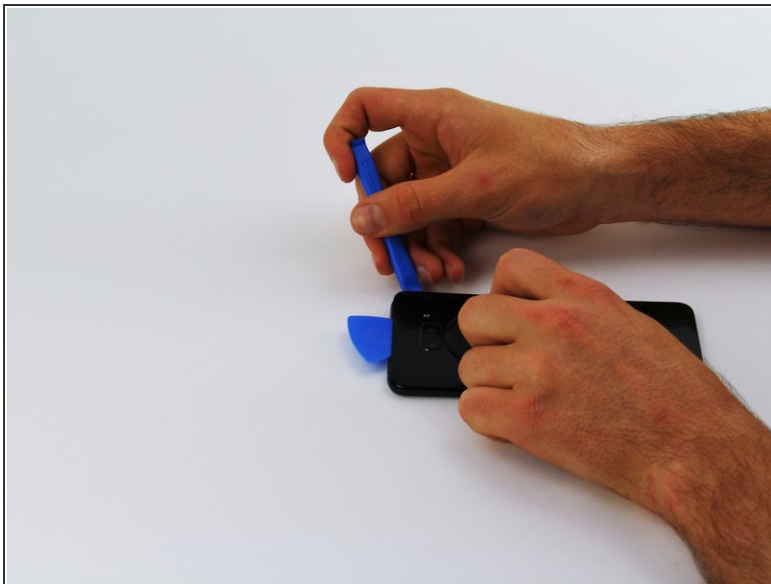


- Insert an Opening Tool into the seam between the rear glass and side of the phone.
- Pry the glass off just enough to insert an Opening Pick.
- Slide the Opening Tool around the edges of the device, placing Opening Picks regularly.

## Step 3

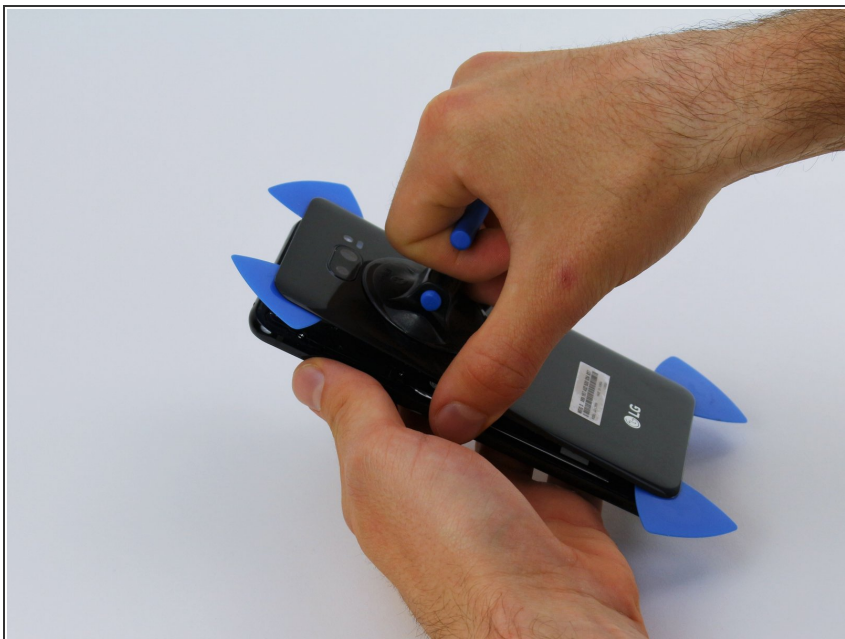

- Once all edges of the device are lifted free, use a Suction Handle to gently pull the rear glass off the device.

## Step 4 — Motherboard

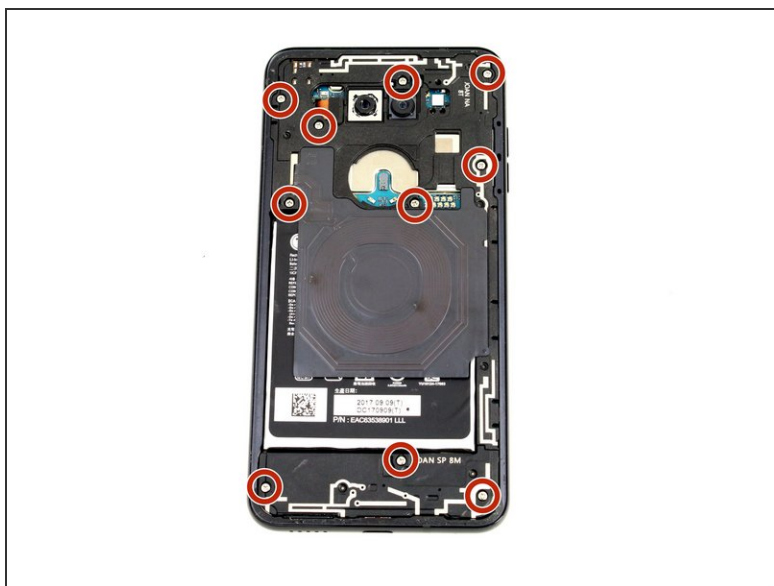

- Remove the ten 4mm screws using the Phillips #00 Screwdriver.




## Step 5



- Gently push down on the small black tab with a Spudger to release the protective board.
- Slide an Opening Tool between the phone and the protective board and slide along the edges of the phone to unclip it.
- Carefully wiggle the board back and forth while gently pulling to unclip the last attachment point.

## Step 6

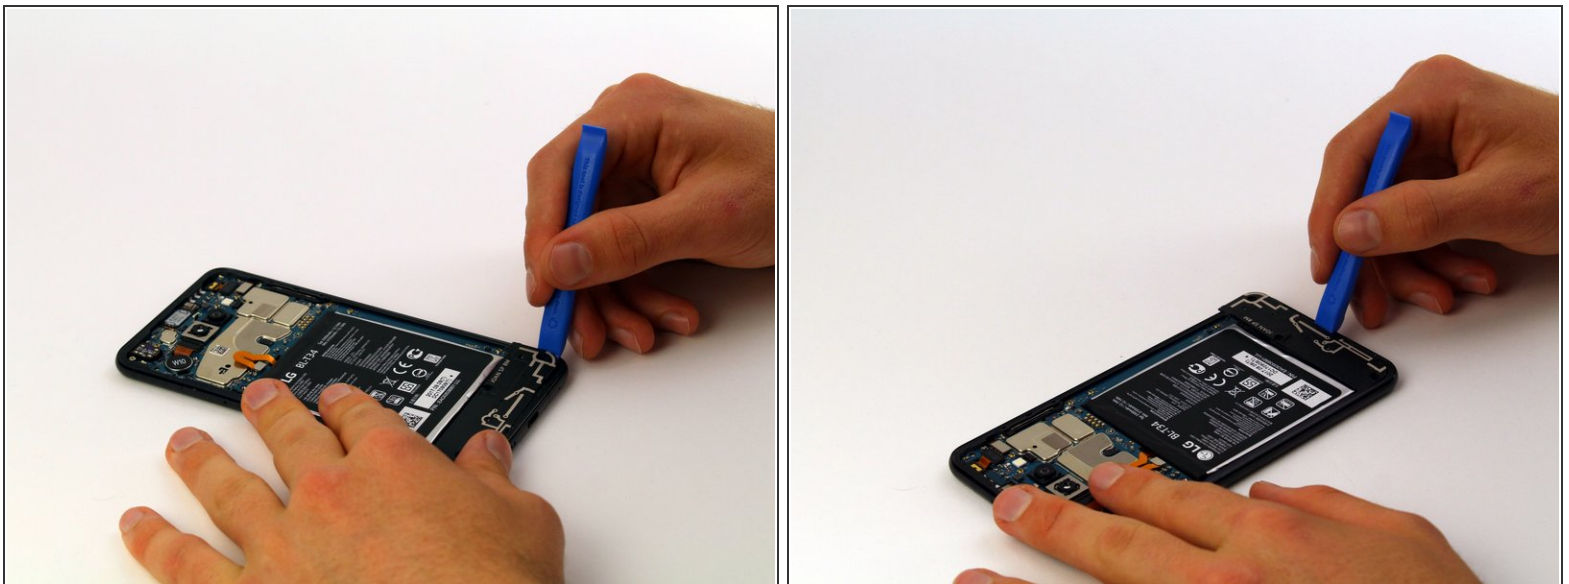


- Slide an Opening Tool between the lower protective board and the phone to unclip.
- Slide the tool along the remaining edges of the protective board until it pops off.

## Step 7



- Gently pry each visible ribbon cable away from the motherboard to disconnect them.

## Step 8

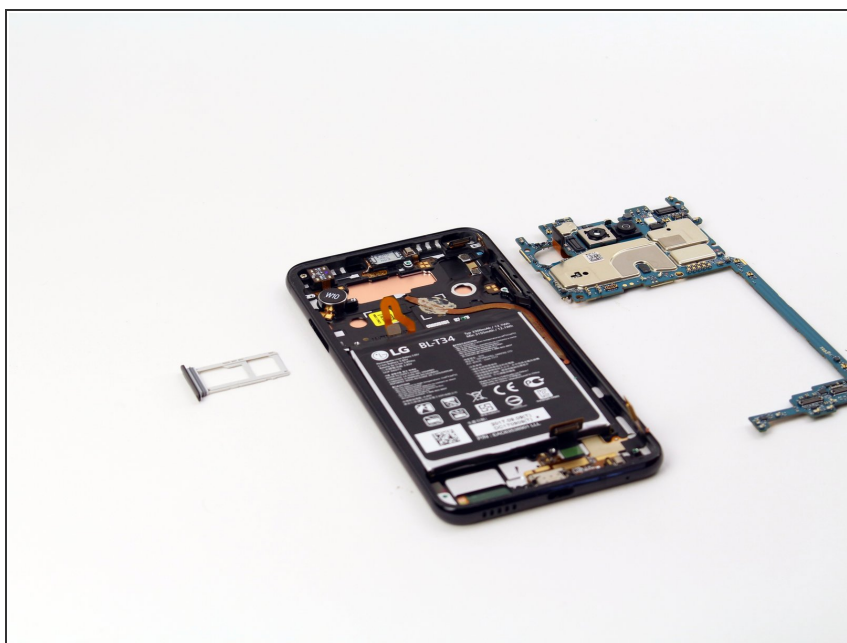

- Gently remove the motherboard from the phone.

To reassemble your device, follow these instructions in reverse order.