




HTC Desire 826 Headphone Jack Replacement

Take five minutes to replace a damaged...

Written By: Payton Rawson

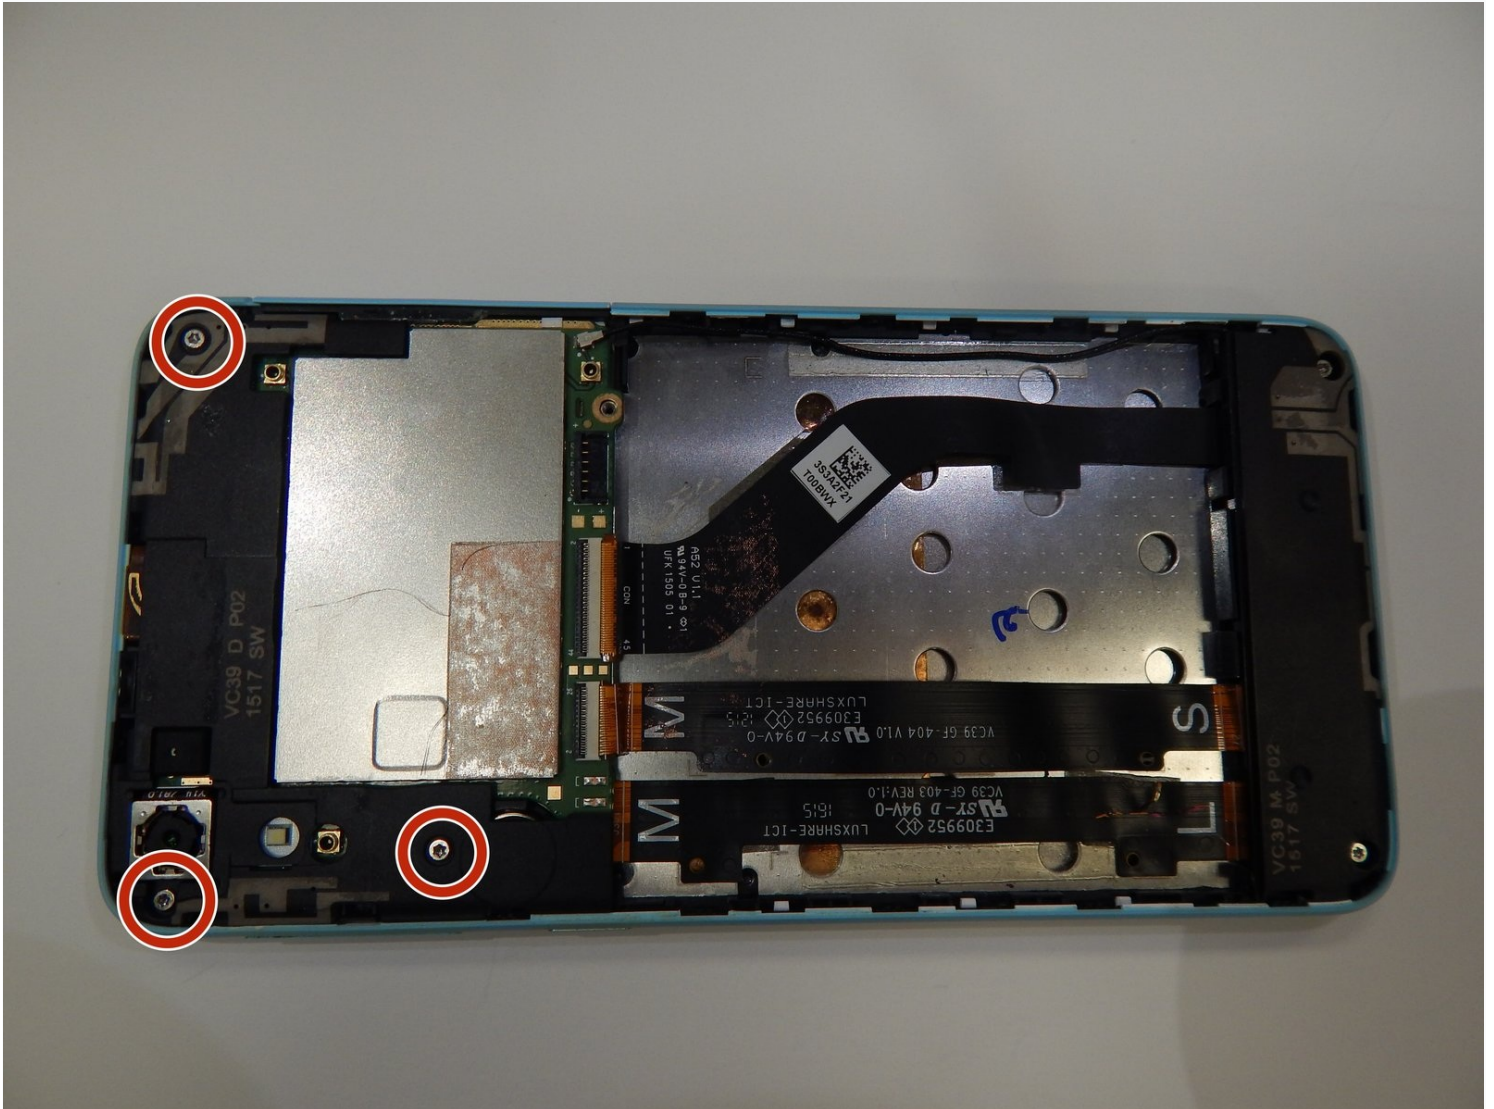

INTRODUCTION

Take five minutes to replace a damaged headphone jack (also known as port) in a HTC Desire 826 cellphone. With pictures and many guided steps. It may be beneficial to refer to the "HTC Desire 825 Battery Replacement" guide. You will also need four tools, 1 T5 Torx Screwdriver, 1 Tweezer, 1 Magnetic Project Mat, and 1 Spudger to complete this task. The costs of tools all together is roughly about \$35 dollars.

TOOLS:

T5 Torx Screwdriver (1)

Tweezers (1)

Magnetic Project Mat (1)



Spudger (1)

Step 1 — Battery




- Find a seam in the back of the device.
- Insert the plastic spudger into the seam and pry off the back panel.
- ① There will be glue, so keep prying until it comes off or you may need to heat up the edges of the device to loosen the adhesive with the [iOpener](#).

Step 2

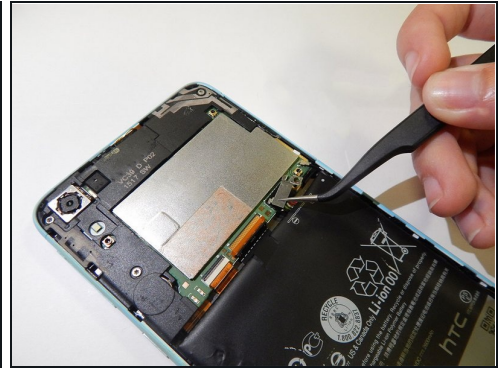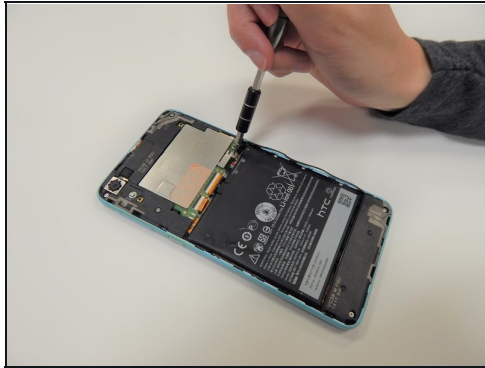



- Remove the 4.0 mm screw above the battery with a T5 Torx screwdriver.
- Remove the metal bracket with the tweezers.

Step 3

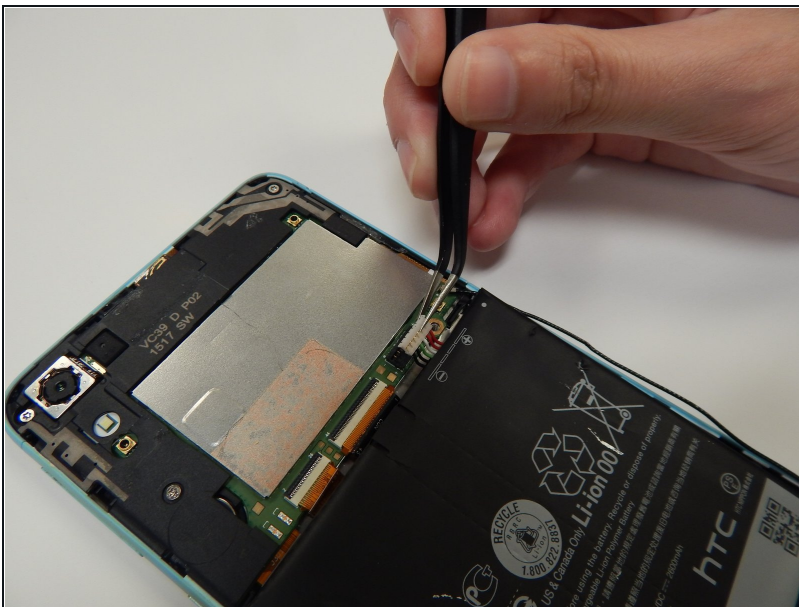




- Disconnect the battery cable from the motherboard with the tweezers.

Step 4

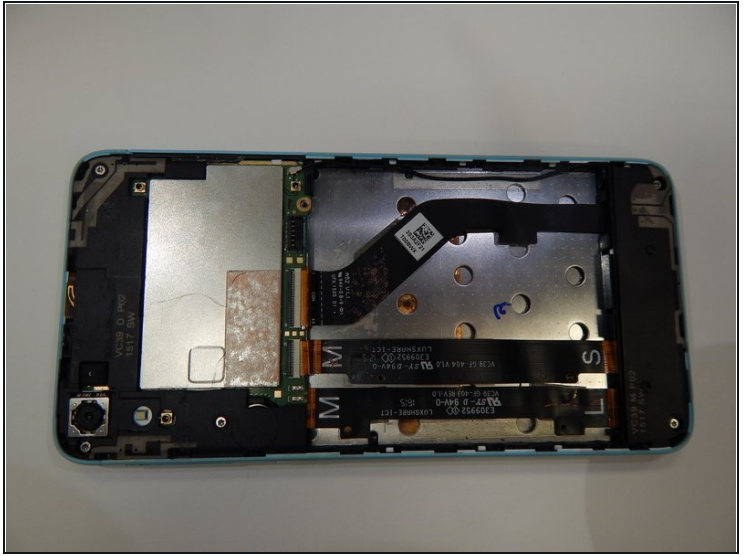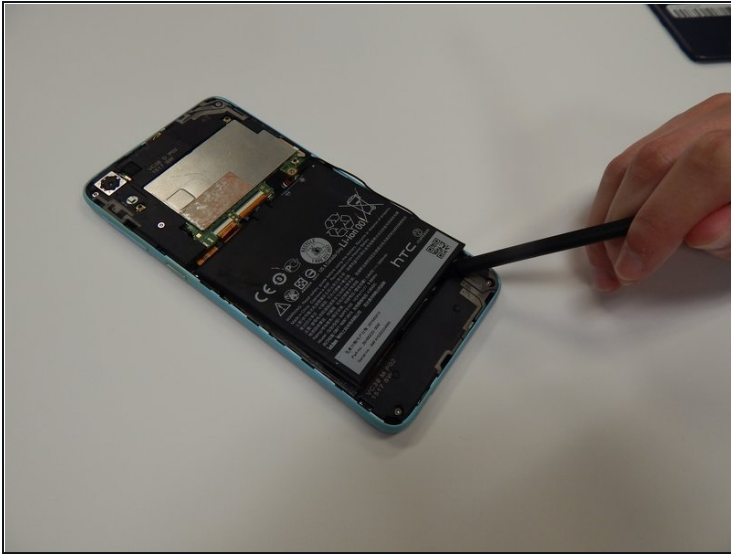



- Lift the battery with a plastic spudger and remove it from the device.

Step 5 — Headphone Jack

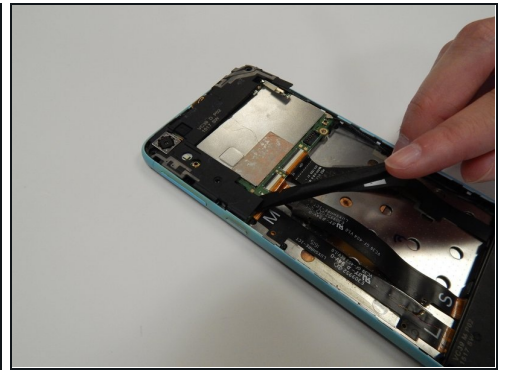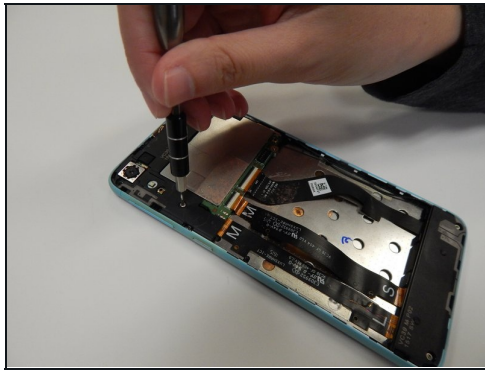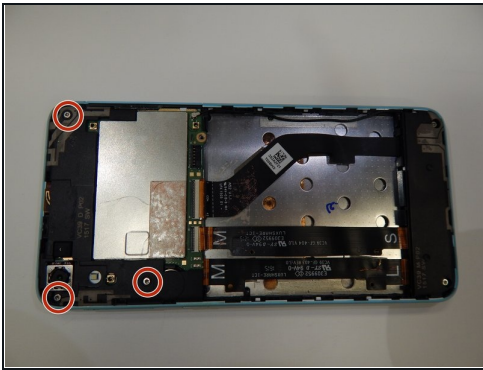




- Use the T5 screwdriver to remove the three 4.00 mm screws as shown.
- Once the screws are removed, pry up the top plastic panel using the black nylon spudger.

Step 6

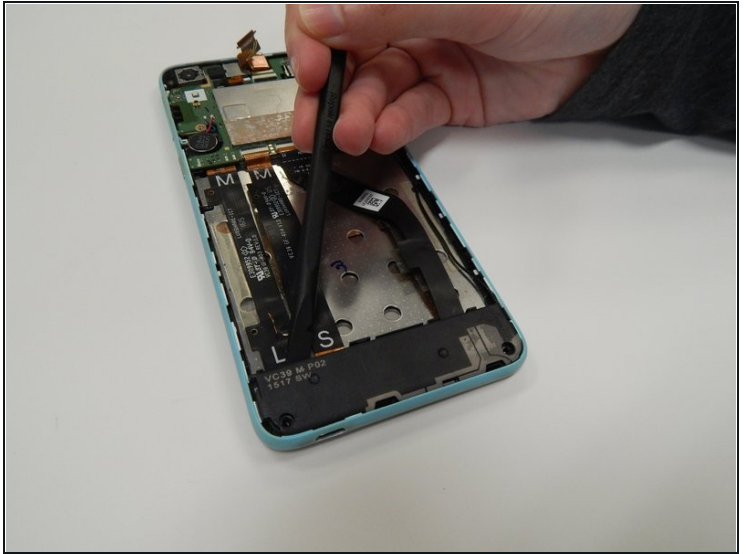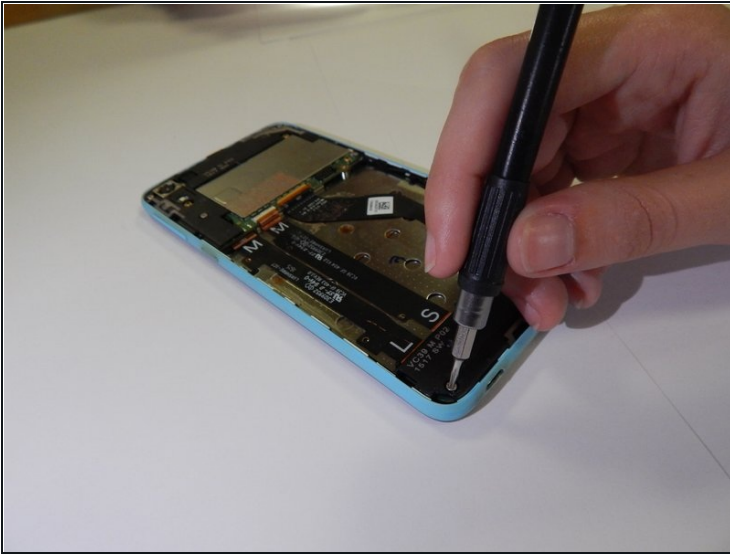



- Unscrew the two 4.00 mm screws attaching the bottom plastic panel using a T5 screwdriver.
- Using the spudger, remove the bottom plastic piece.

Step 7

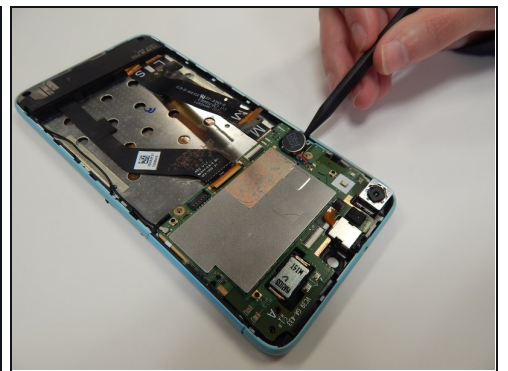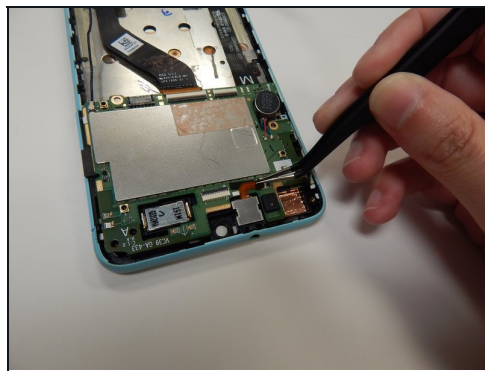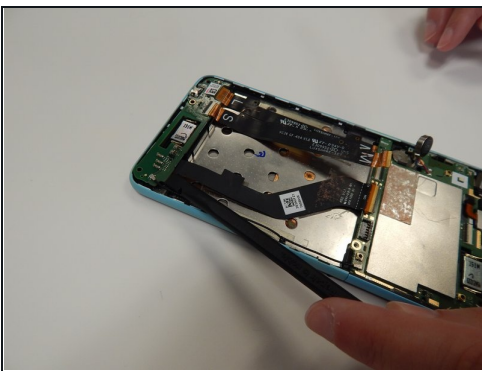

- Using the spudger, remove the bottom part of the motherboard.
- Using the angled tweezers, disconnect the headphone jack from the motherboard.
- Using the plastic spudger, pop out the circular silver piece and lift the top part of the motherboard.

Step 8

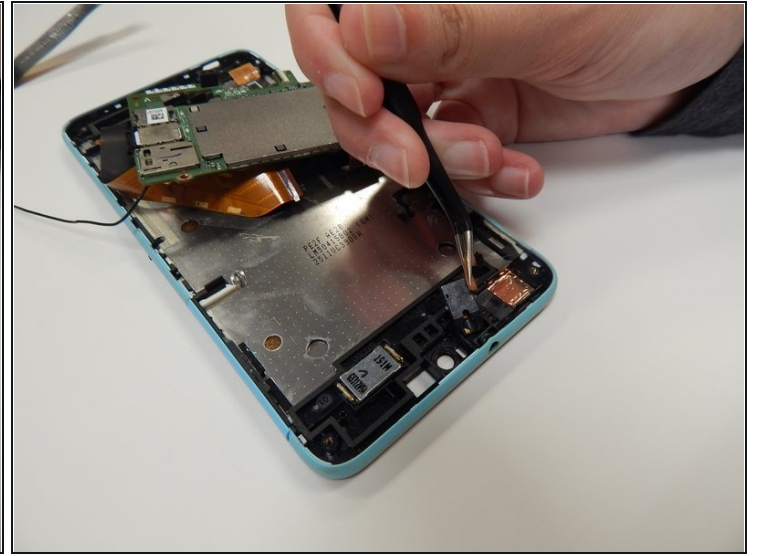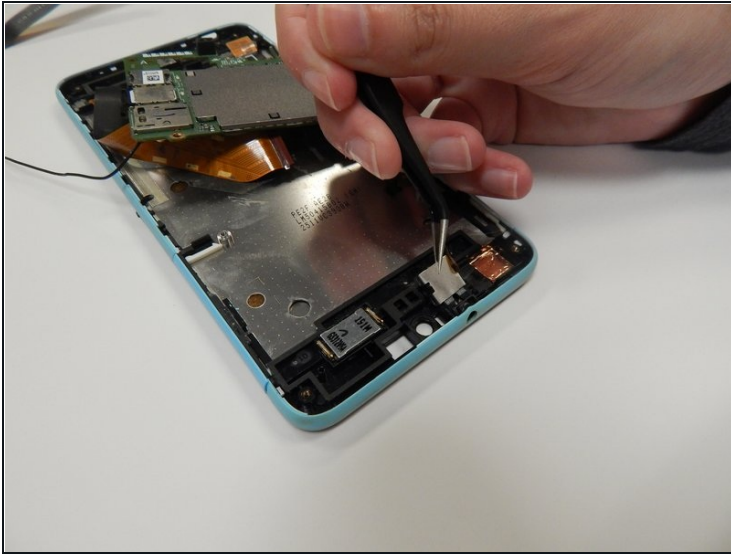

- Using the angled tweezers, pop off the metal piece on top of the headphone jack.
 - Using the angled tweezers, remove the headphone jack.
-

To reassemble your device, follow these instructions in reverse order.