



Black and Decker BL3000S Blender Blades Replacement

This guide will help you check your blender blades to ensure that they are operating properly.

Written By: Andrew



INTRODUCTION

This installation guide will help you separate the blades from the blender jar. Once separated, you can successfully install replacements blades or to check for any malfunctions with the blades.

Step 1 — Blender Blades



- ❗ Make sure the blender is turned off and unplugged from all power.
- Remove the glass jar from the base of the blender.

Step 2




- Remove the top lid from the blender jar.


Step 3




- Twist the plastic base of the jar counterclockwise to remove it from the glass upper half.

 Take care not to cut yourself on the blades.

Step 4

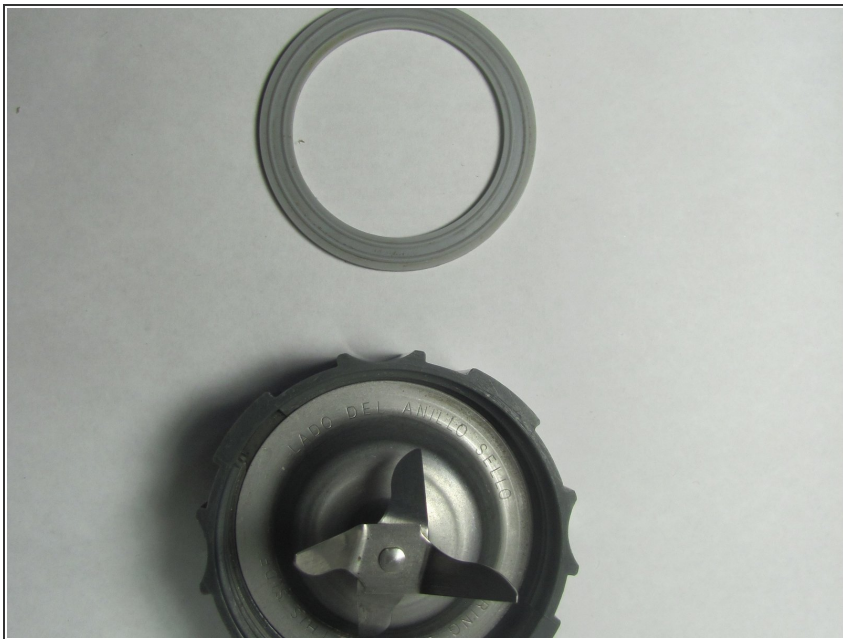

- Lift the rubber washer straight up to remove it from the blade assembly.

 Take care not to cut yourself on the blades.

Step 5



- Lift the blades from the bottom cap.

To reassemble your device, follow these instructions in reverse order.