



ASUS PadFone X Station USB Charging Port Replacement

You will be replacing the USB Charging Port using a Phillips head screwdriver.


Written By: Daniel



 **TOOLS:**


- [Phillips #00 Screwdriver \(1\)](#)
-

Step 1 — Back Cover

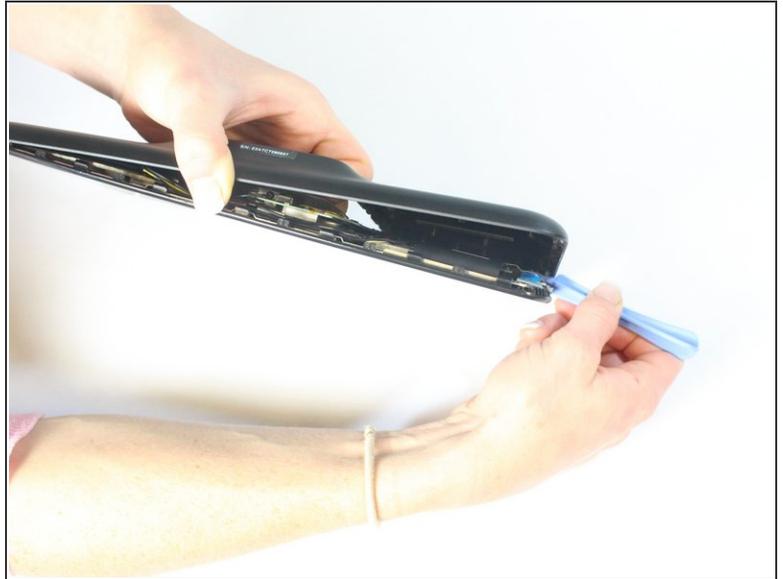


- Using the plastic opening tools, insert it into the edge and pry open.
- Use hands to help pull the back off from the front if needed.

Step 2 — Check USB Charging Port for water damage

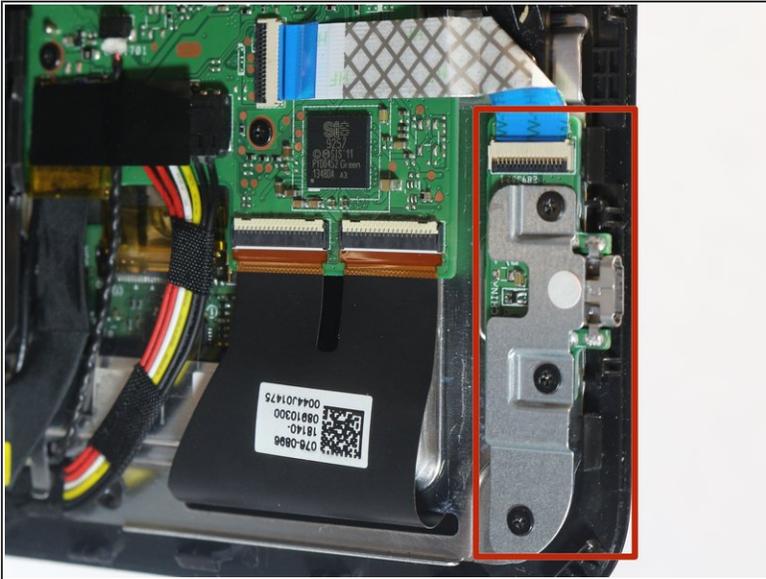

- Locate CON2002
 - Check water indicator on USB Charging Port
- i** A white indicator means there is no water damage. A red indicator means there was water damage.

Step 3 — Removing Charging Port

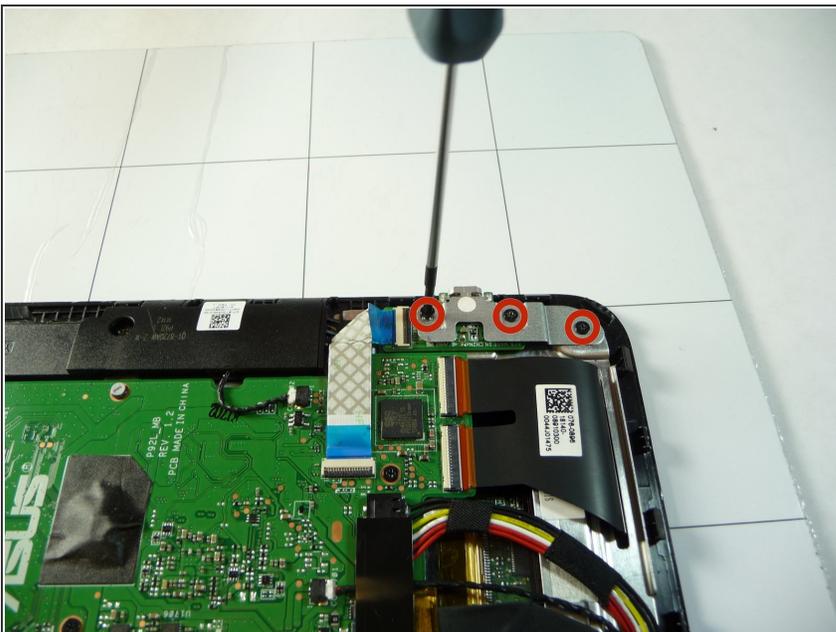

- Locate and remove three Phillips screws

Step 4 — Disconnect E893821



- Use a pair of tweezers to disconnect E893821

To reassemble your device, follow these instructions in reverse order.