



# ASUS PadFone X Station USB Charging Port Replacement

Written By: Daniel




---

🔧 **TOOLS:**

Phillips #00 Screwdriver (1)


---

### Step 1 — Back Cover

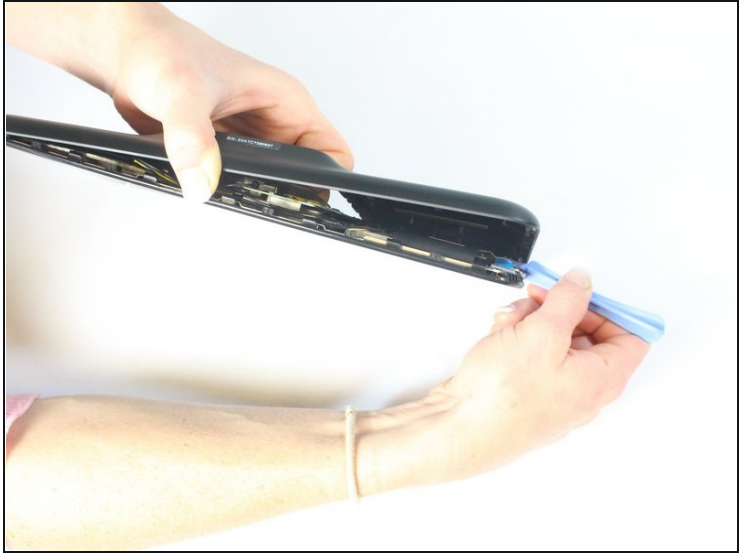

- Using the plastic opening tools, insert it into the edge and pry open.
- Use hands to help pull the back off from the front if needed.

## Step 2 — Check USB Charging Port for water damage

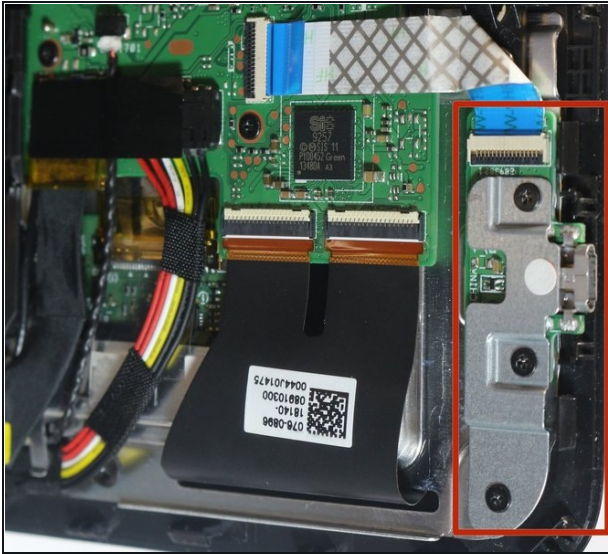

- Locate CON2002
  - Check water indicator on USB Charging Port
- ① A white indicator means there is no water damage. A red indicator means there was water damage.

## Step 3 — Removing Charging Port



- Locate and remove three Phillips screws



## Step 4 — Disconnect E893821



- Use a pair of [tweezers](#) to disconnect E893821

---

To reassemble your device, follow these instructions in reverse order.