




Nokia Lumia 925 Motherboard Replacement

Written By: Joseph McCoy

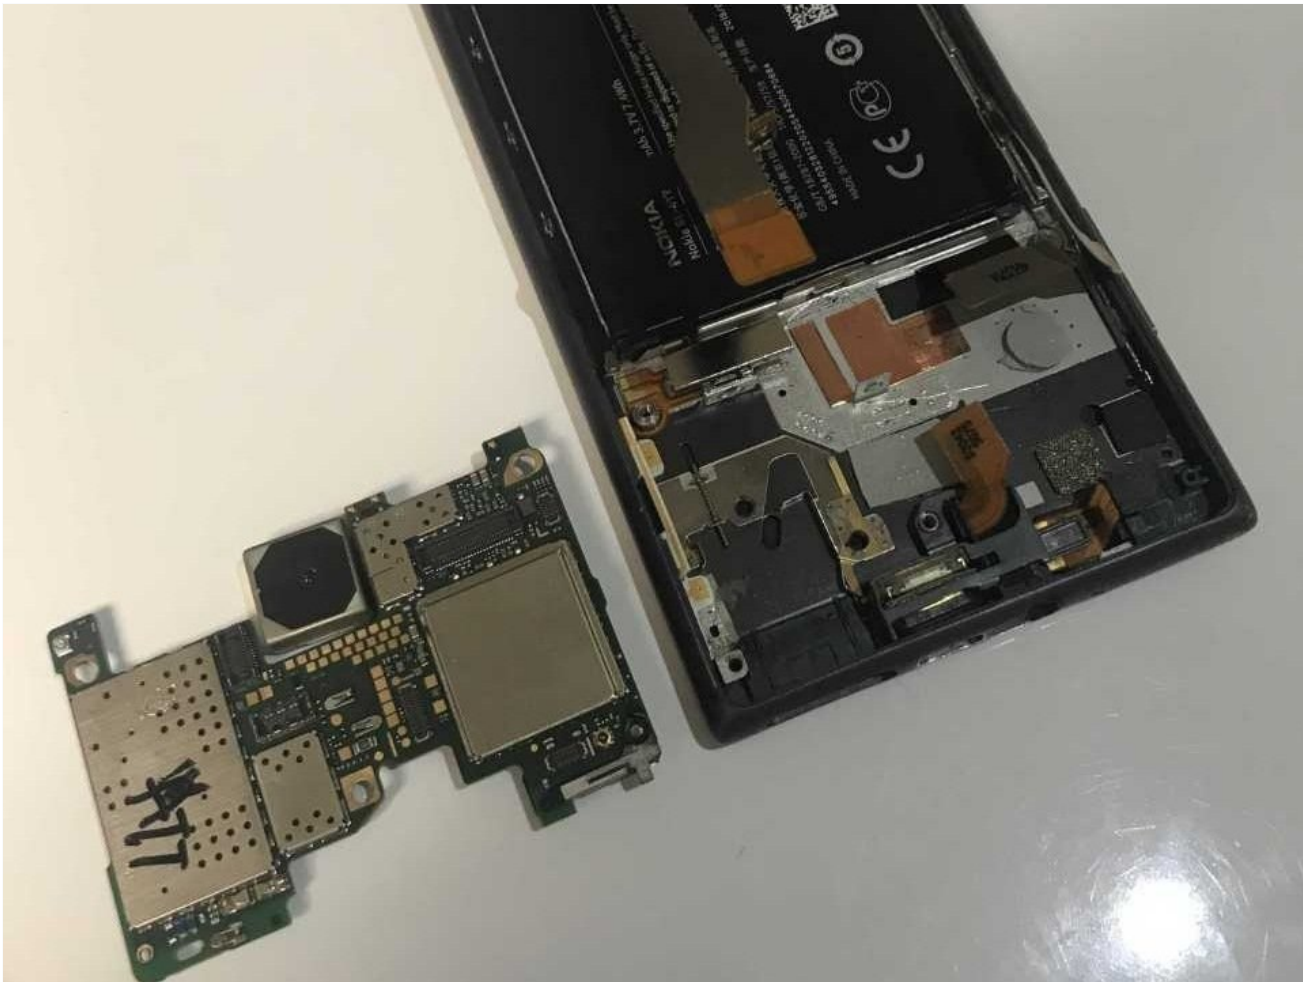

TOOLS:

[TR7 Torx Security Screwdriver](#) (1)

[T5 Torx Screwdriver](#) (1)

[iFixit Opening Tool](#) (1)

[Tweezers](#) (1)

PARTS:

[nokia lumia 925 motherboard](#) (1)

Step 1 — Motherboard



- Remove the sim card holder by inserting [tweezers](#) into the hole. Push down and the holder will spring back up.
 - Pull out the holder until it is completely separate.
- ① Something like a paperclip will work if there are no tweezers available.


Step 2



- Slide a plastic opening tool under the back cover.
- Slide the tool around the outsides of the cover to fully dislodge the pins holding the cover to the phone.

⚠ Some pins are facing the opposite way from the others.

Step 3

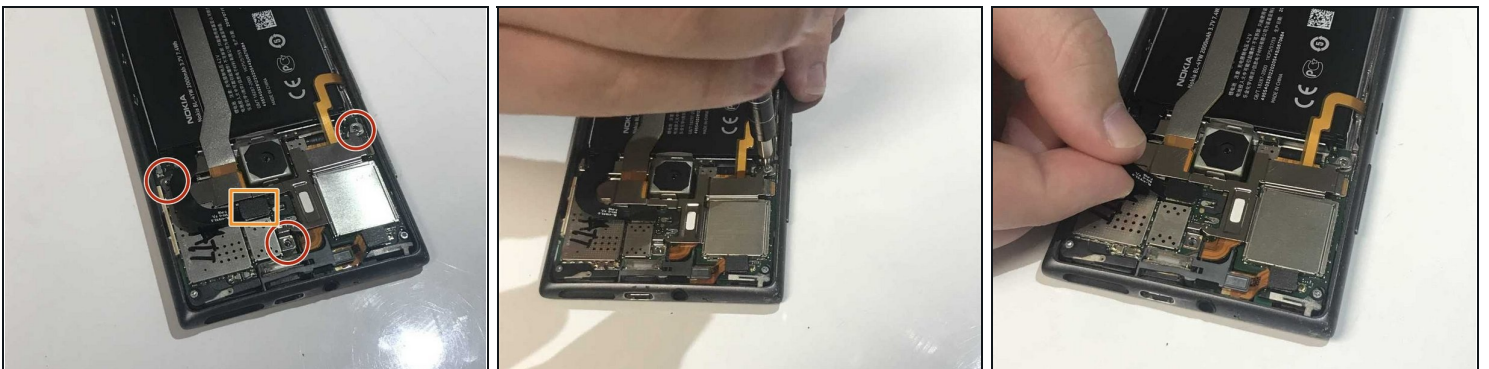

- Remove the 3 screws using the T7 Torx screwdriver.
- Unclip the black tab connector.

Step 4



- Remove the silver metal cover.


⚠ Be careful of the tape under the right square side of the panel. Using a spudger helps.

Step 5



- Unclip the two orange tabs.
- Remove the four silver screws using the T5 Torx screwdriver.

Step 6

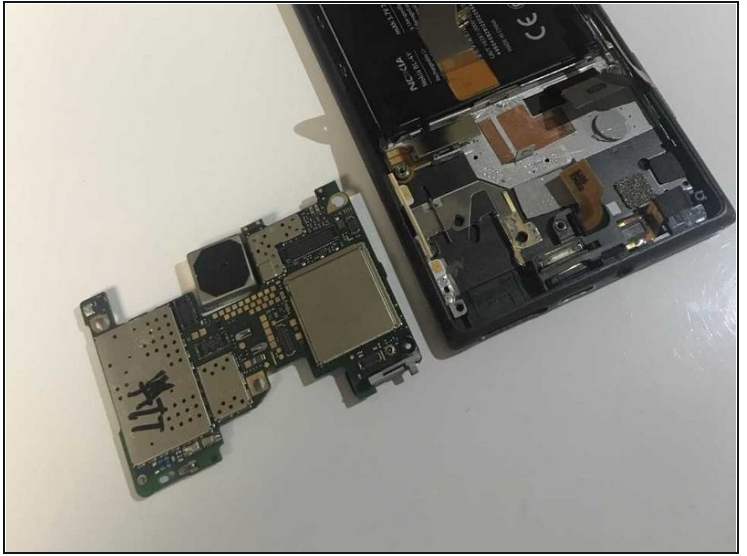

- Remove the motherboard by sliding tweezers between it and the back of the screen. Lift up.

To reassemble your device, follow these instructions in reverse order.