




# Sharp Aquos Serie mini SHV31 Battery Replacement

When doing this action, remember to power down...

Written By: Allison Leal

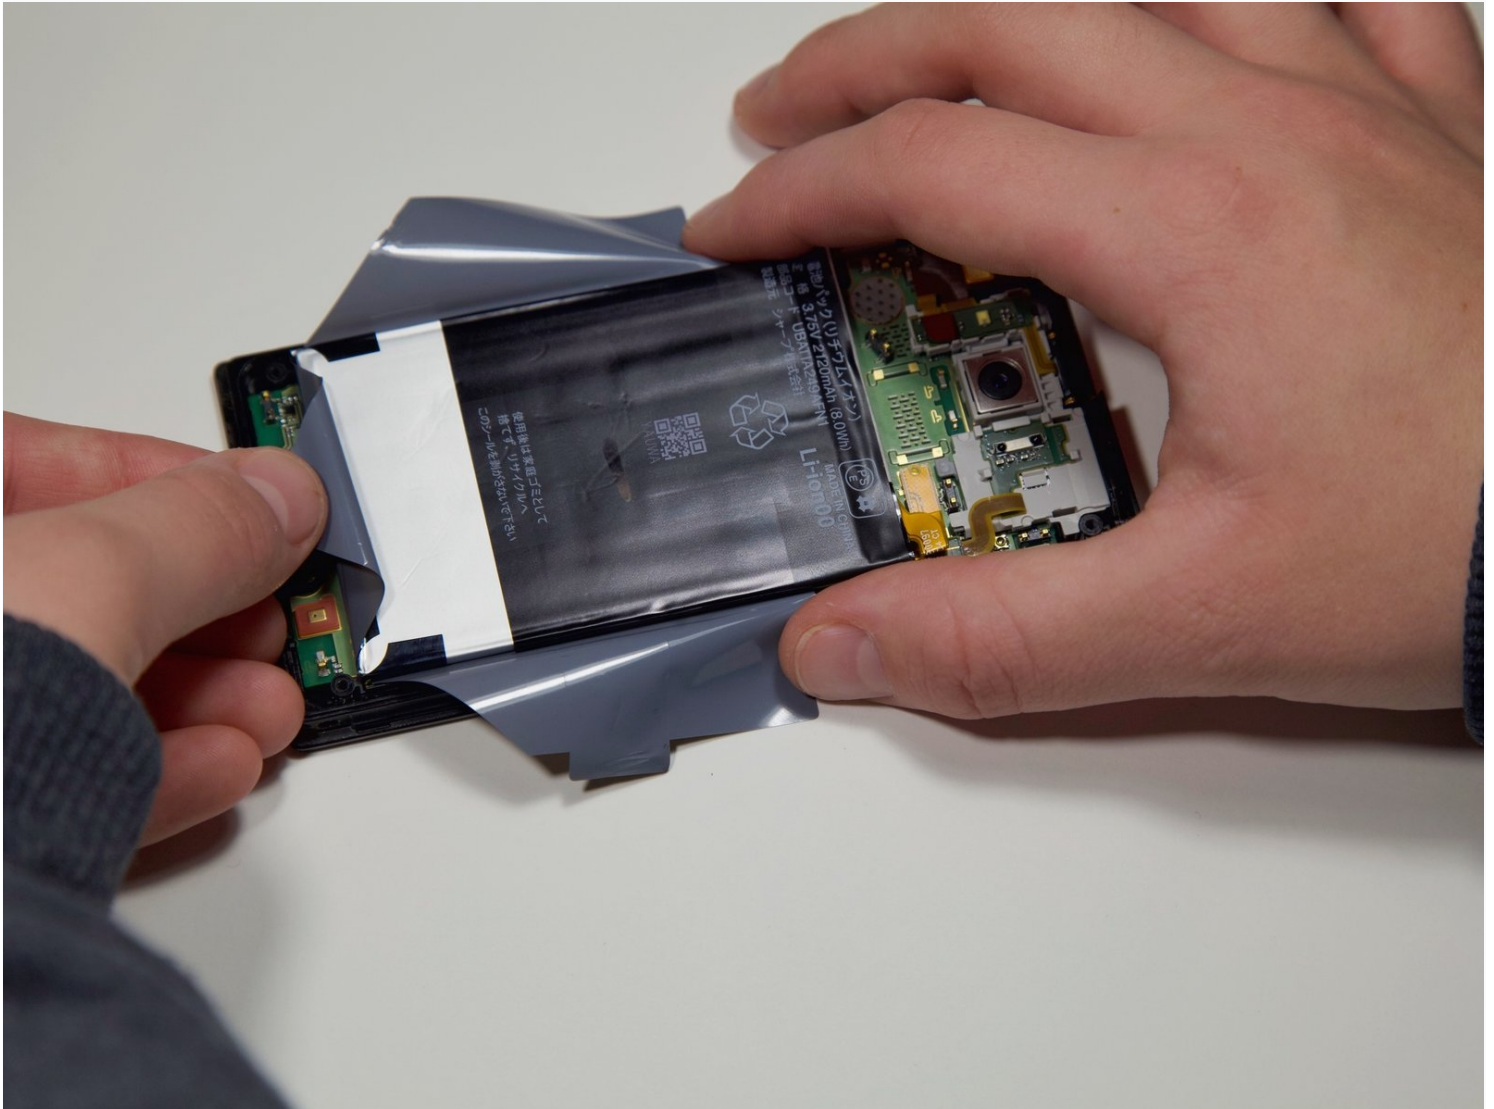

# INTRODUCTION

When doing this action, remember to power down the phone before disconnecting the battery. Also be careful not to completely remove the paper as it helps to keep electrical connections underneath. This repair may be needed if the battery in the phone is found to be faulty.

---

## TOOLS:

[T5 Torx Screwdriver](#) (1)

[Tweezers](#) (1)

[Spudger](#) (1)



---

## Step 1 — Back Cover



- Begin by using a nylon spudger to pry off the back.

## Step 2

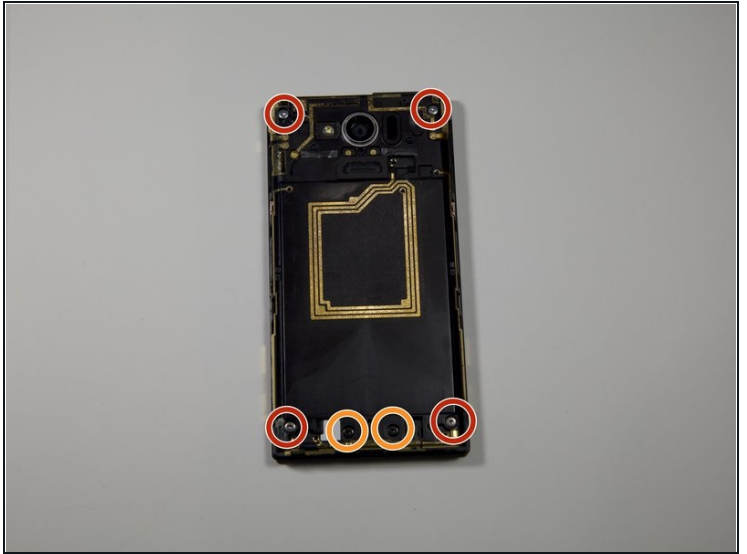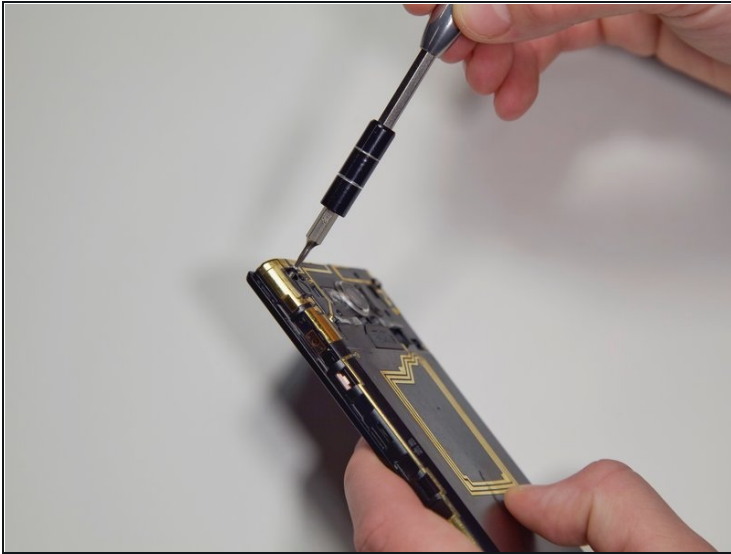


- Remove case around battery using a T5 screwdriver to remove four 5mm silver screws.
- Remove two 6mm T5 black screws.

## Step 3





- Use the [tweezers](#) to remove the pink clips on either side of the device and then take the casing off.

## Step 4 — Battery

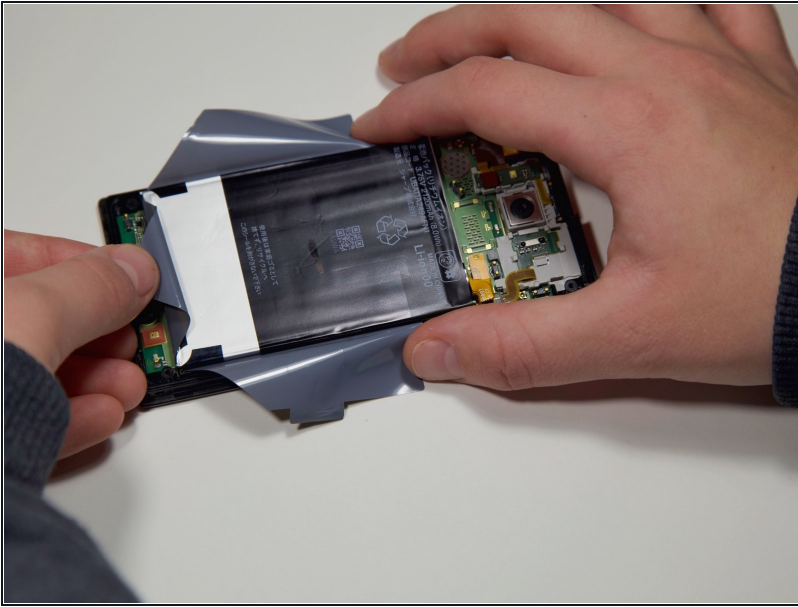

- Peel back the grey paper wrapping around the battery.

## Step 5

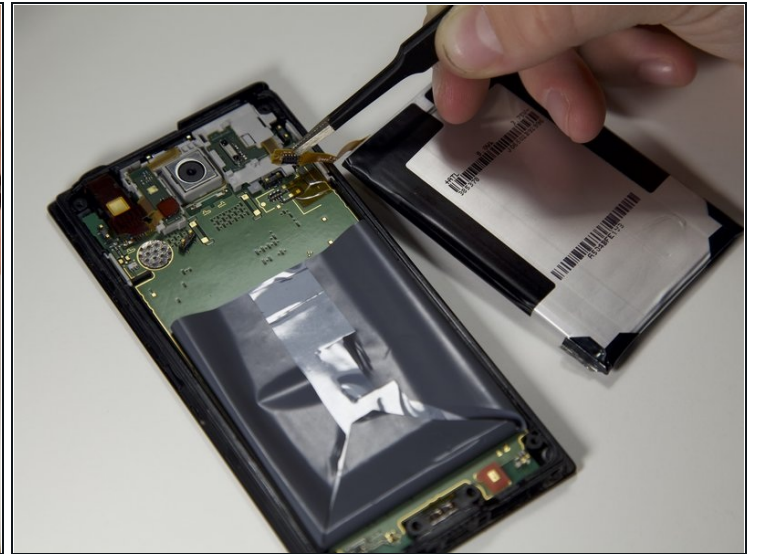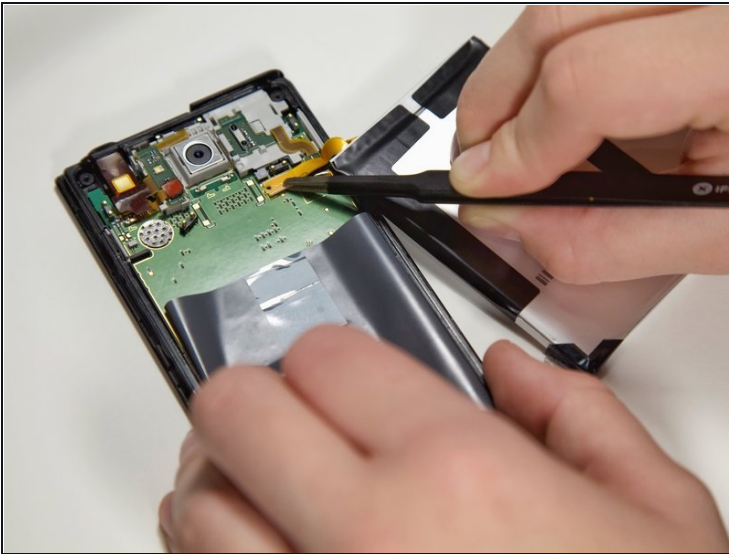

- Use the [tweezers](#) to remove the Pancake connector that connects the battery to the phone.

---

To reassemble your device, follow these instructions in reverse order.