




Asus 1015E-DS03 Screen Replacement

This guide will help you to remove your screen in order to replace it.

Written By: Becca Day

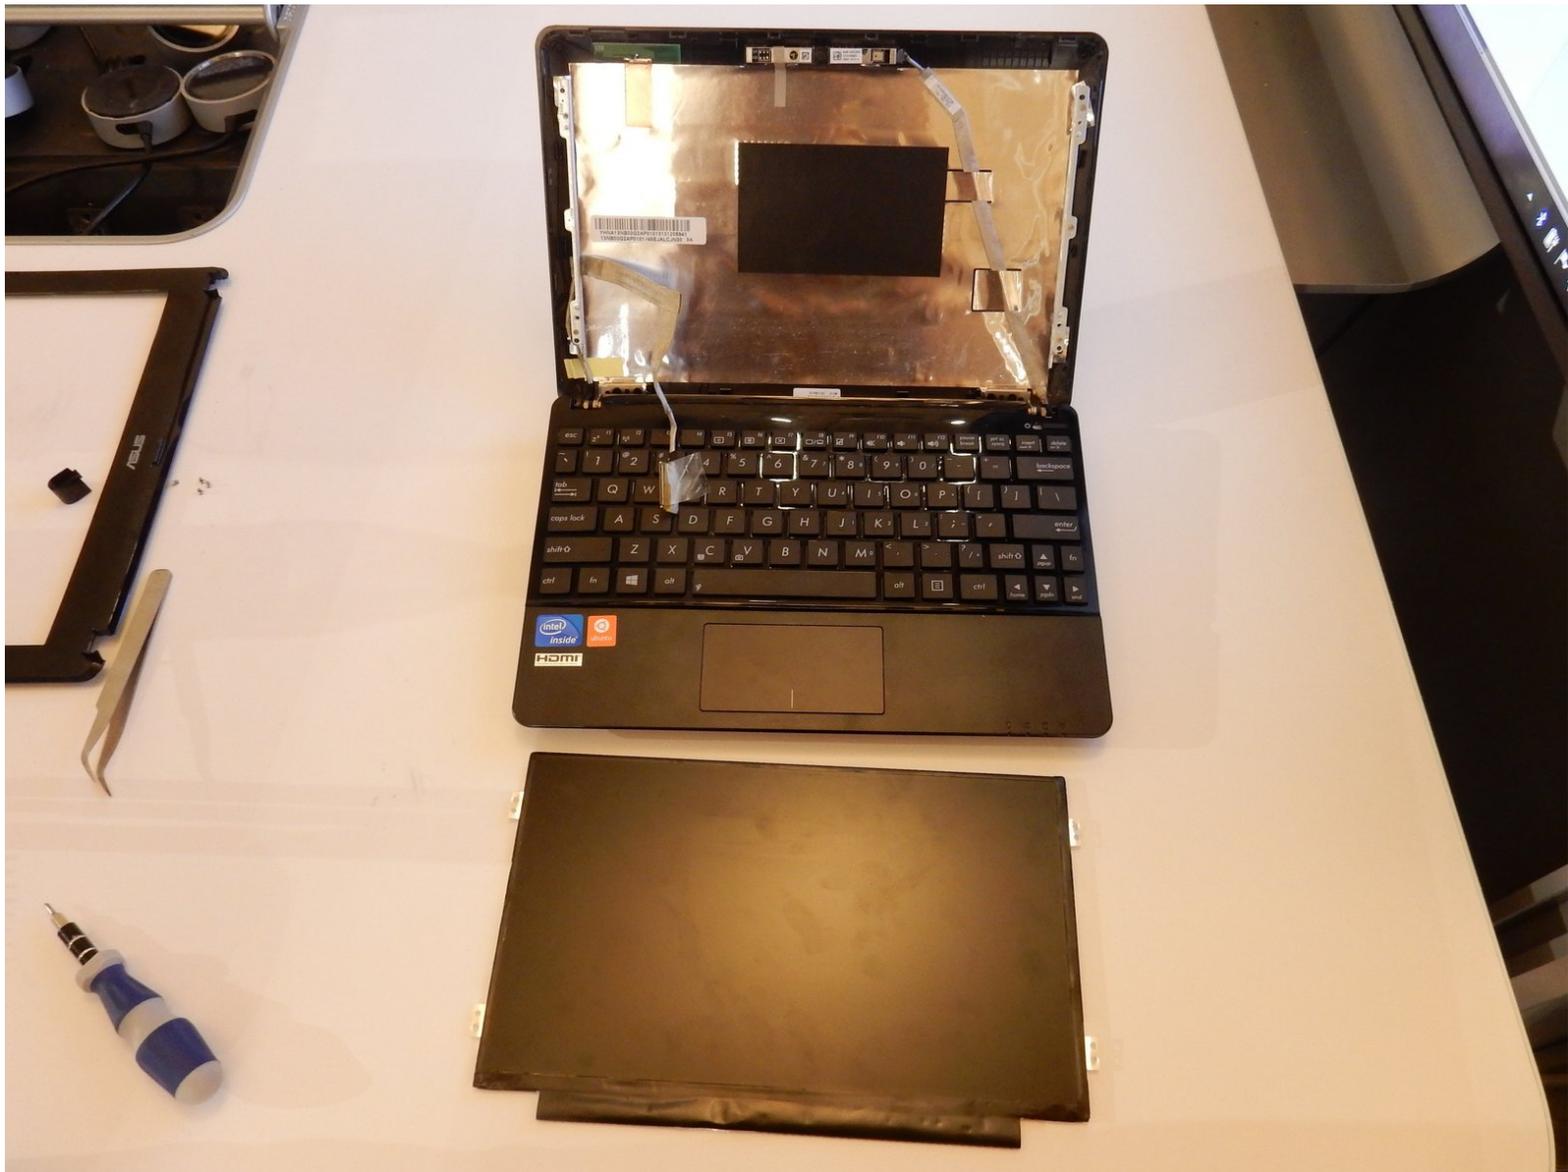

INTRODUCTION

The following guide will help the user remove the screen. The screen trim can be removed using a spudger. A Phillips #0 screwdriver is needed to remove the screws keeping the screen attached to the laptop.

TOOLS:


- [Fingers](#) (1)
 - [Spudger](#) (1)
 - [Phillips #0 Screwdriver](#) (1)
-

Step 1 — Battery



- Hold the laptop using both hands with the battery facing upwards.

Step 2

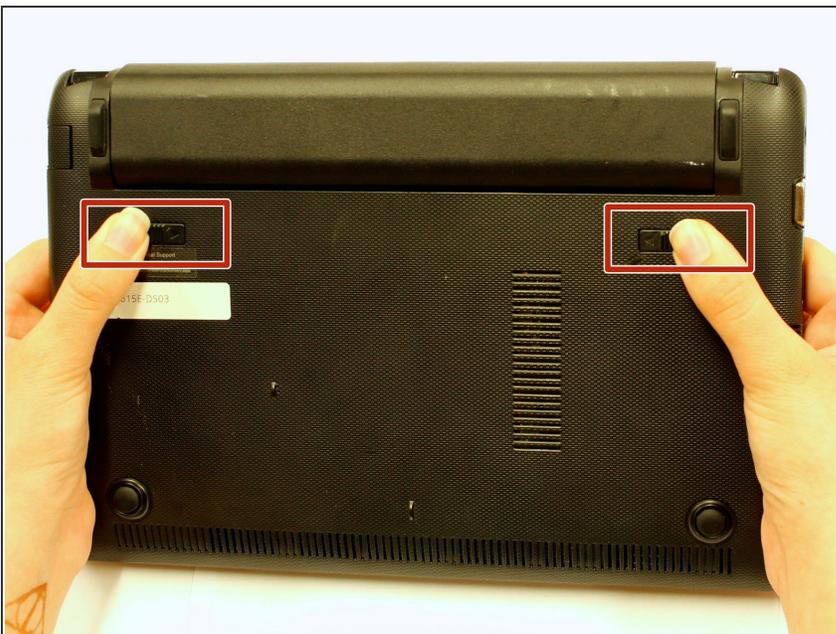

- Push the two tabs located below the battery in towards each other using your thumbs.

Step 3



- Push the battery upwards and out of the laptop as shown.

Step 4



- Continue to push the battery upwards until it is completely separated from the laptop as shown.

Step 5 — Front Screen Case



- Push up on the back of the tabs that cover the hinges connecting the screen to the base of the laptop.
- While pushing up on the back of the tabs, insert the spudger into the opening created from pushing on the tabs until the tab detaches.

Step 6



- Once the case has been separated from the laptop, pull the case off completely, using the plastic opening tool or your fingers.


i You will hear popping noises which are to be expected.

Step 7





- When the screen case has been successfully removed, the laptop should resemble the photo shown here.

Step 8 — Screen

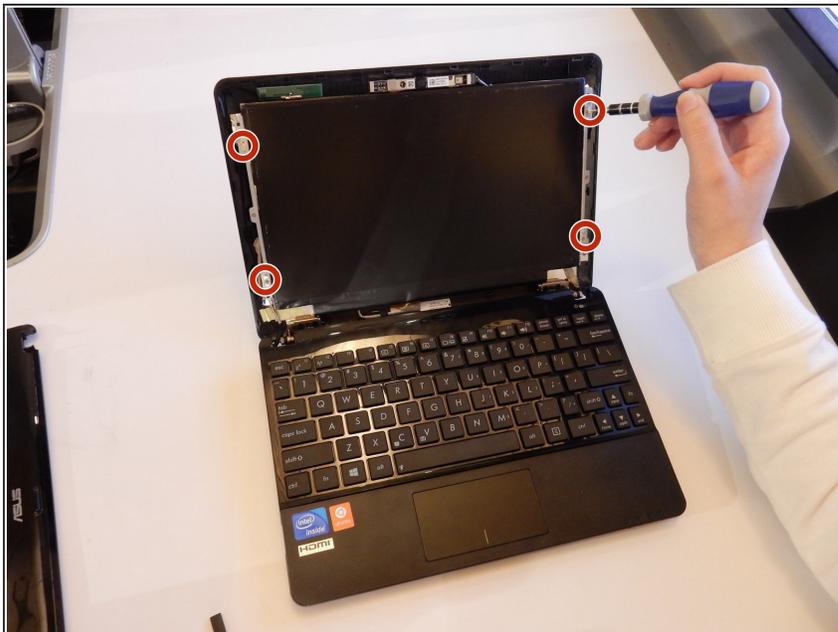

- Unscrew the 3 mm screws (4) using a #0 Phillips head screwdriver.


Step 9

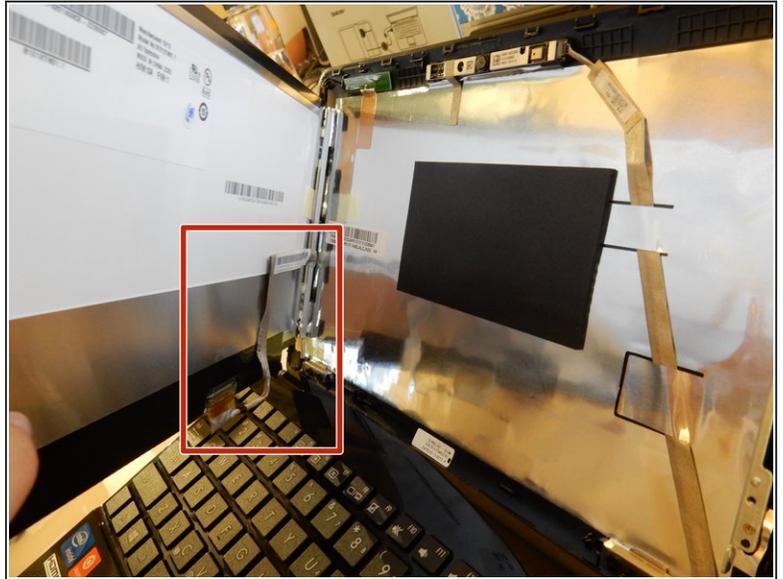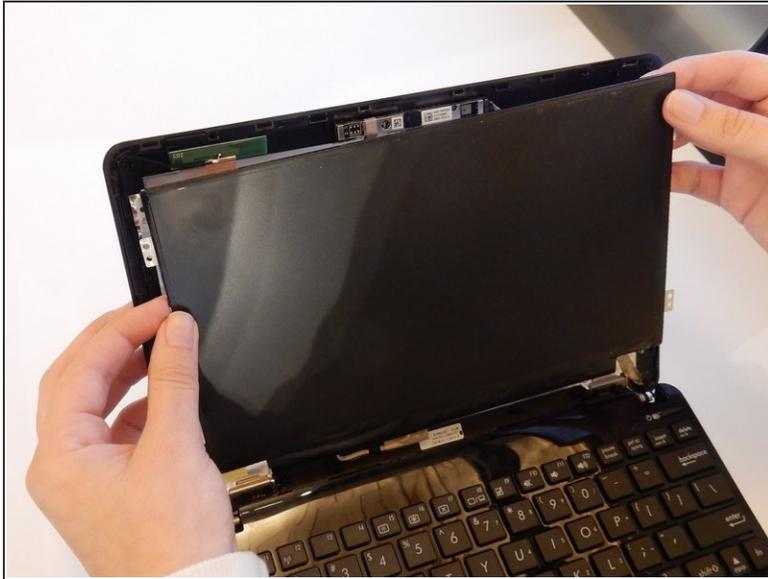

- Lift the screen away from the computer.


⚠ Be careful removing the screen, as the left side is still connected to the computer.

Step 10

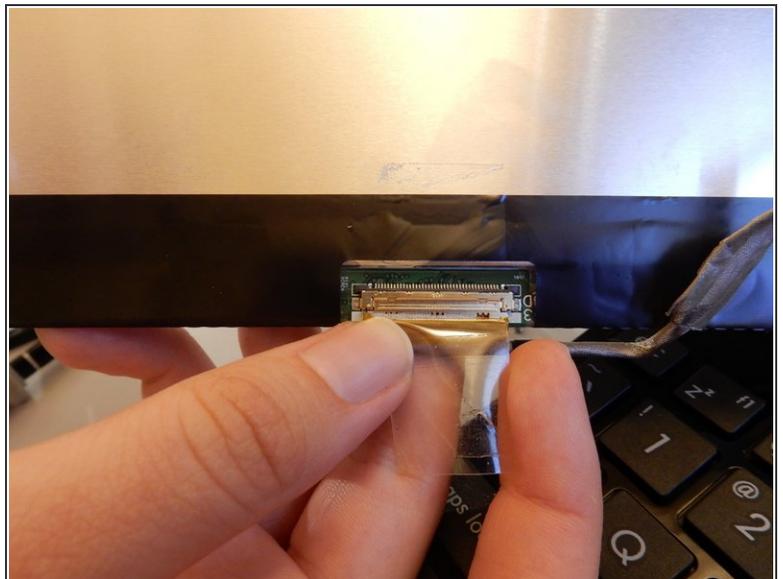


- Remove the wire that is glued to the back of the screen with your fingers.
- Remove the tape covering the connection port.

Step 11

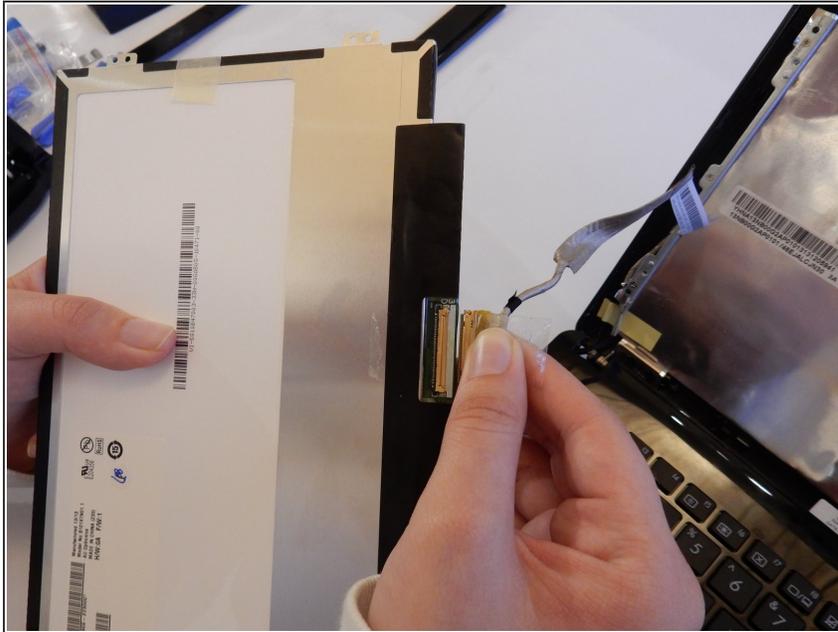

- Separate the screen from the computer by gently pulling it out.

Step 12

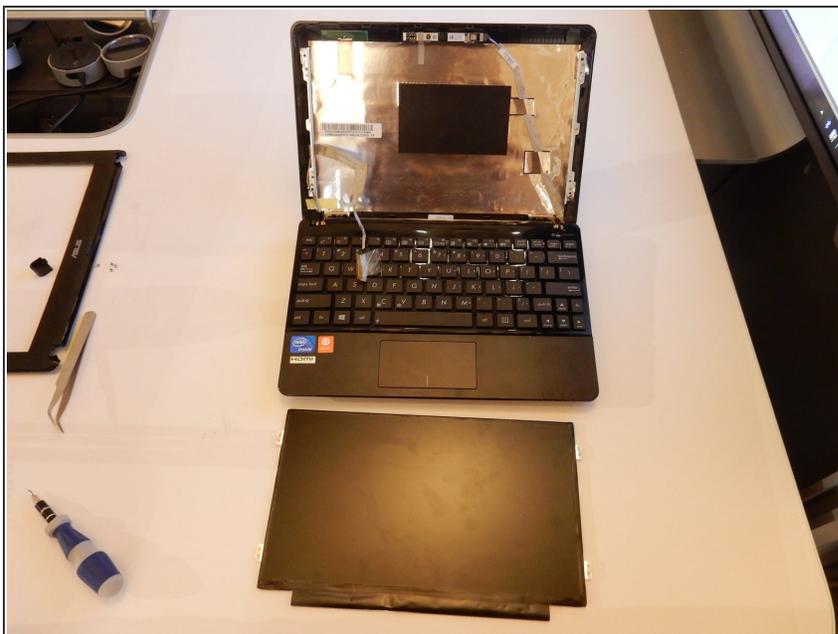

- Upon removal, the computer should look like this picture.

To reassemble your device, follow these instructions in reverse order.