



# Turtle Beach Ear Force Stealth 500P Battery Replacement

A guide for the repair of a loose connection on the Turtle Beach Ear Force Stealth 500P battery.

Written By: Noah Franklin



# INTRODUCTION

Use this guide to replace the battery in your Turtle Beach Ear Force Stealth 500P headphones.



## TOOLS:

- [wire cap](#) (2)

Small

- [Phillips #1 Screwdriver](#) (1)
  - [Metal Spudger](#) (1)
  - [Wire Stripping/Crimping Tool](#) (1)
  - [JIS #00 Screwdriver](#) (1)
-

## Step 1 — Earpad Assembly



- Remove the ear pad from the earphone by gently pulling the cloth pad outwards from the slot holding the cloth.
- Work circularly until removed.

## Step 2



- Using a Phillips #1 screwdriver, remove the four fastening screws that hold the blue plastic speaker mount in place.
- Gently pull blue plastic from black housing by hand until separated.




### Step 3 — Battery




- Use screwdriver tip J00 to remove three screws fastening circuit board to casing.

### Step 4

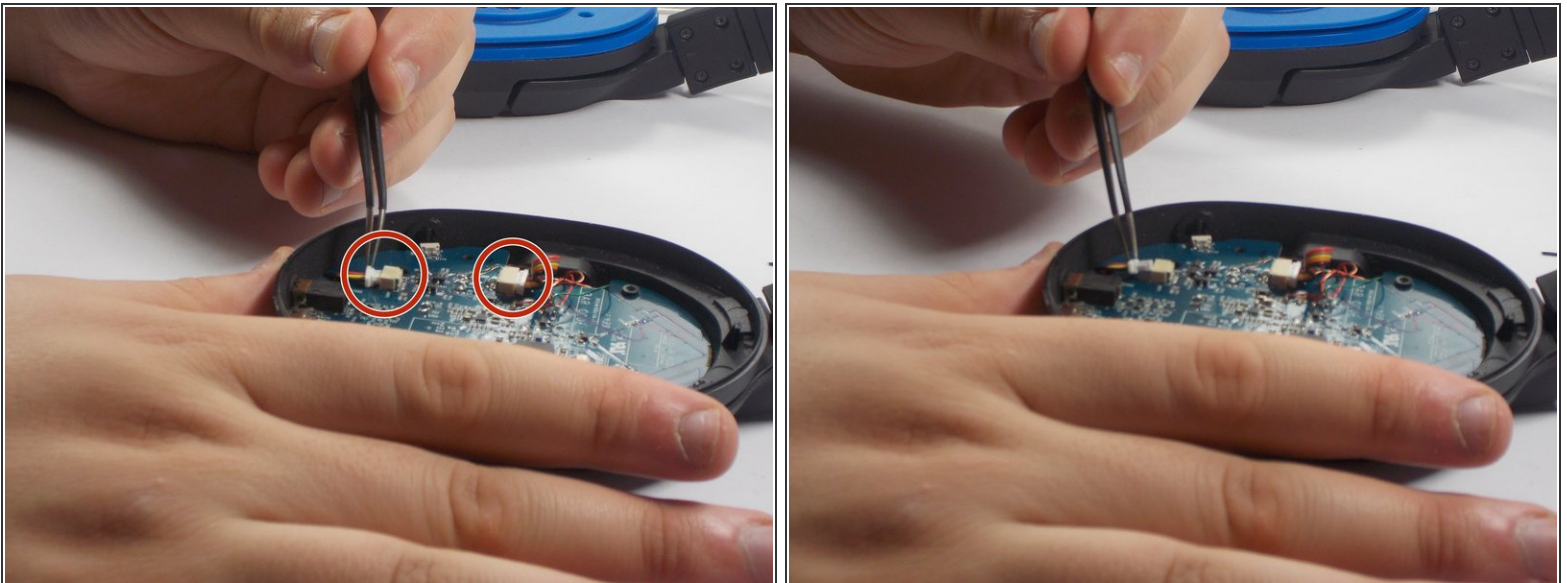


- Use bent tweezers to remove two wire connector plugs from circuit board.

## Step 5

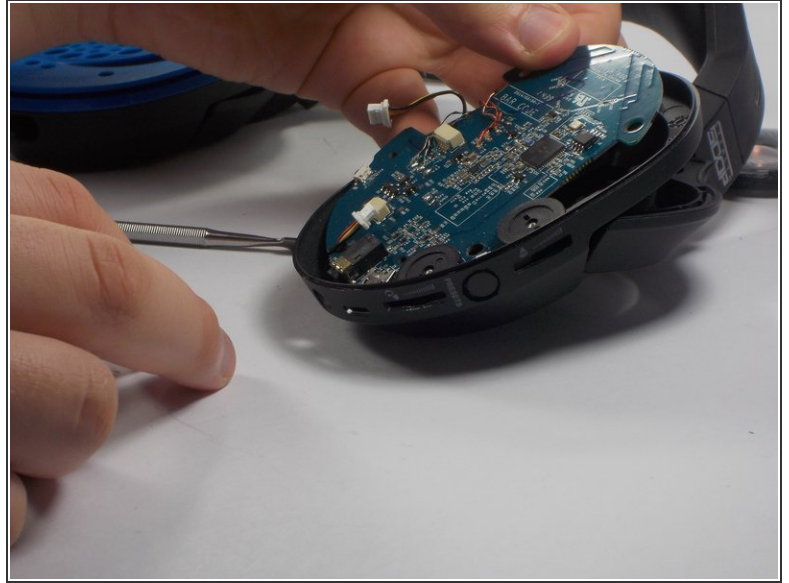


- Circuit board will be free to be removed by hand. Use plastic pry tool to slide between casing and circuit board if needed.

## Step 6

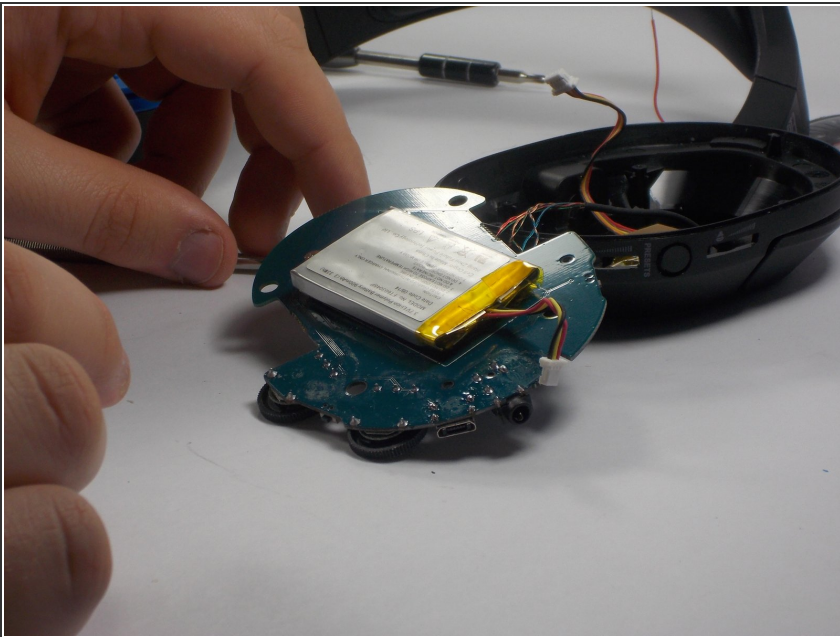


- Gently removed and flip over circuit board to reveal battery pack attached to the underside. Careful not to pull out wires running through headband.

## Step 7

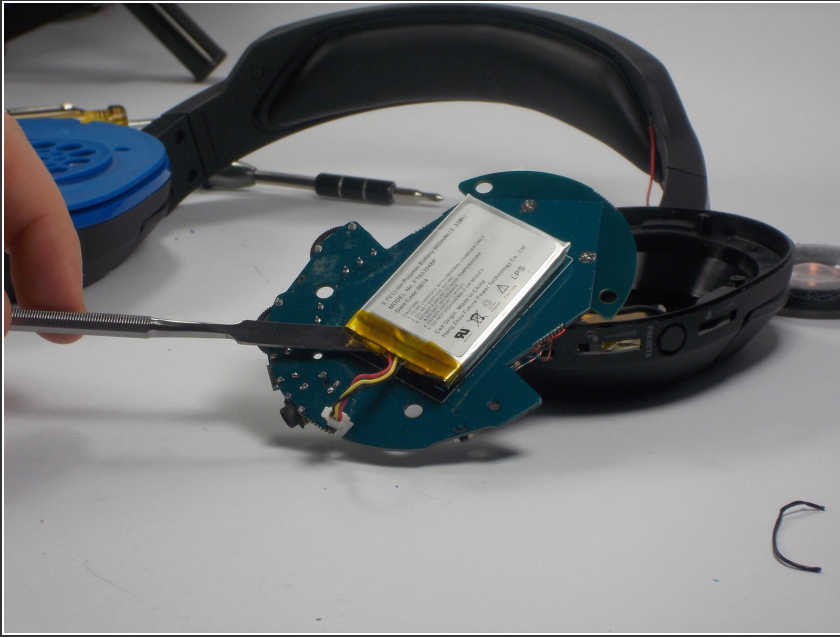

- Use metal pry tool to slide between battery and circuit board to break up adhesive. Ensure the battery wire connector plug has been removed on front side.

## Step 8

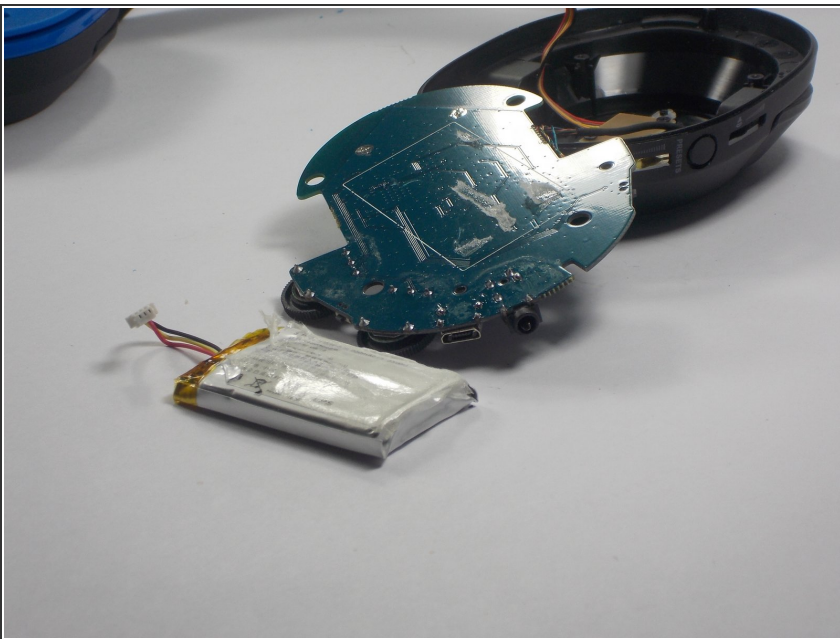

- Battery will be free to be removed and replaced.

To reassemble your device, follow these instructions in reverse order.