



HTC Desire 826 Screen Replacement

How to replace your screen to your HTC Desire 826.

Written By: Julia Zimmerman



INTRODUCTION

How to replace your screen to your HTC Desire 826.

TOOLS:

[Spudger](#) (1)


[Metal Spudger Set](#) (1)

[T5 Torx Screwdriver](#) (1)

[Tweezers](#) (1)



[Magnetic Project Mat](#) (1)

Step 1 — Battery

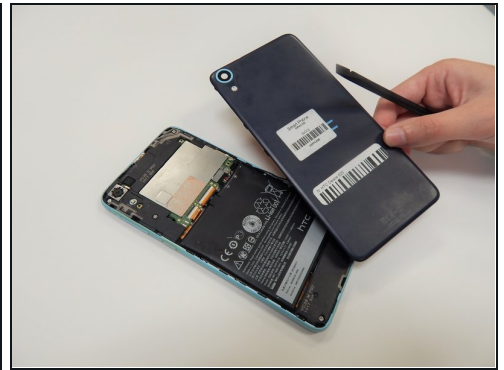


- Find a seam in the back of the device.
 - Insert the plastic spudger into the seam and pry off the back panel.
- ⓘ There will be glue, so keep prying until it comes off or you may need to heat up the edges of the device to loosen the adhesive with the [iOpener](#).

Step 2

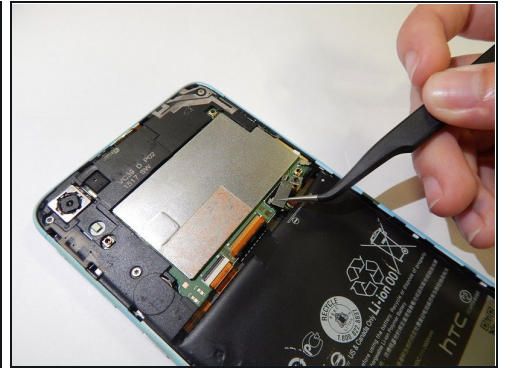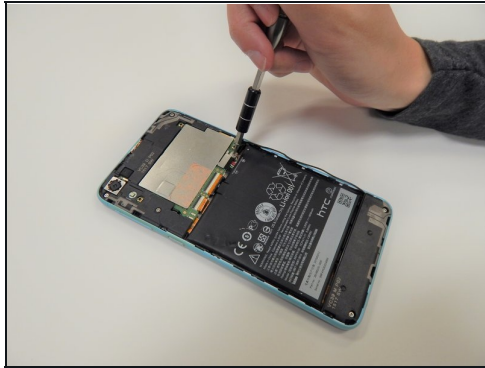


- Remove the 4.0 mm screw above the battery with a T5 Torx screwdriver.
- Remove the metal bracket with the [tweezers](#).

Step 3

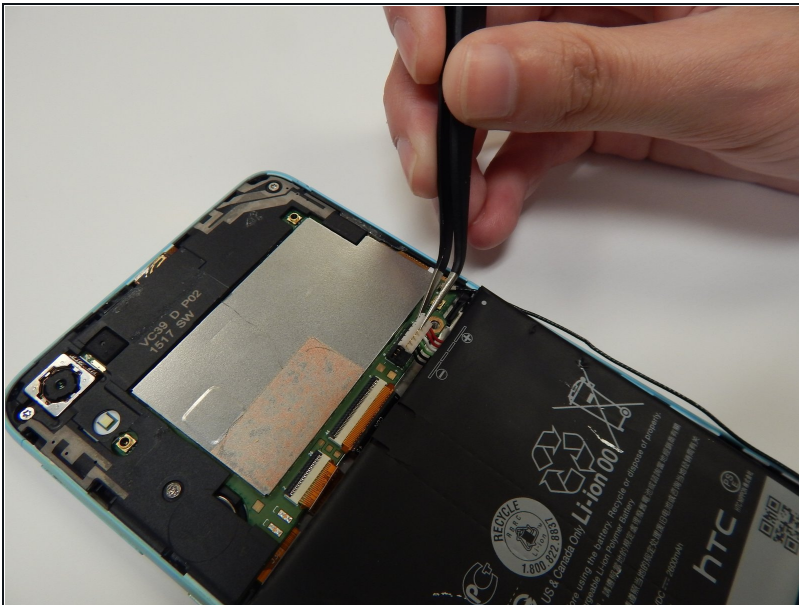


- Disconnect the battery cable from the motherboard with the tweezers.

Step 4

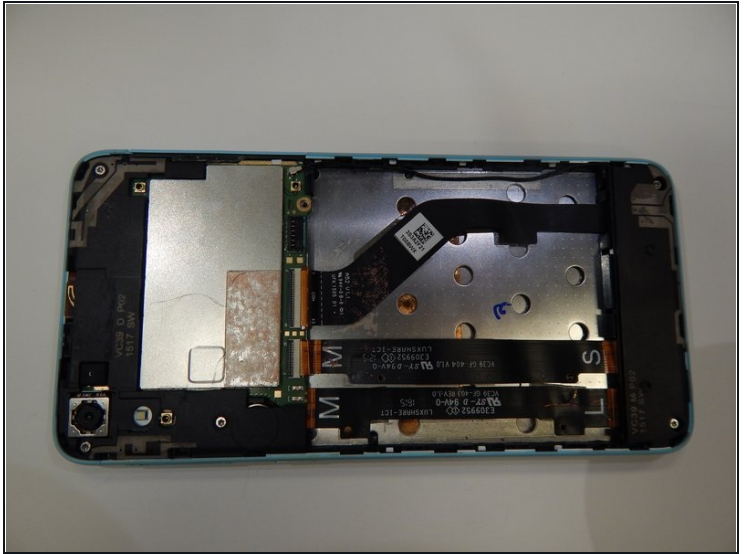


- Lift the battery with a plastic spudger and remove it from the device.

Step 5 — Screen

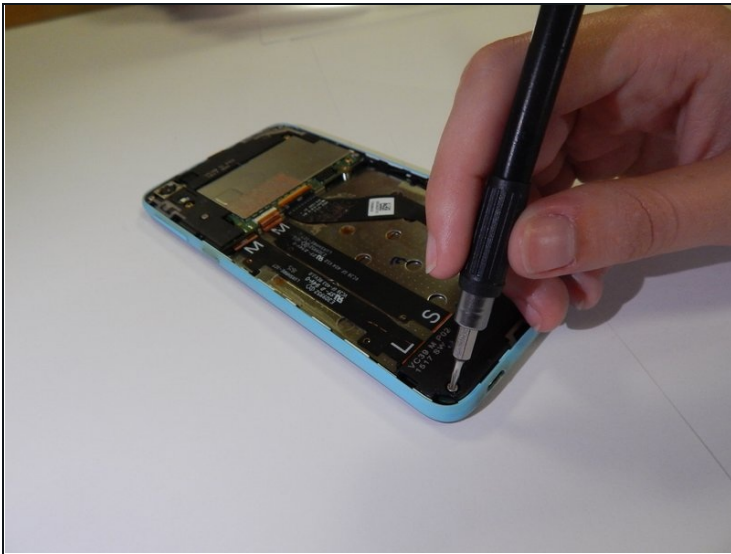


- Remove the two 4.0 mm screws attaching the bottom plastic panel using a T5 screwdriver.
- Remove the black plastic cover using a plastic spudger

Step 6

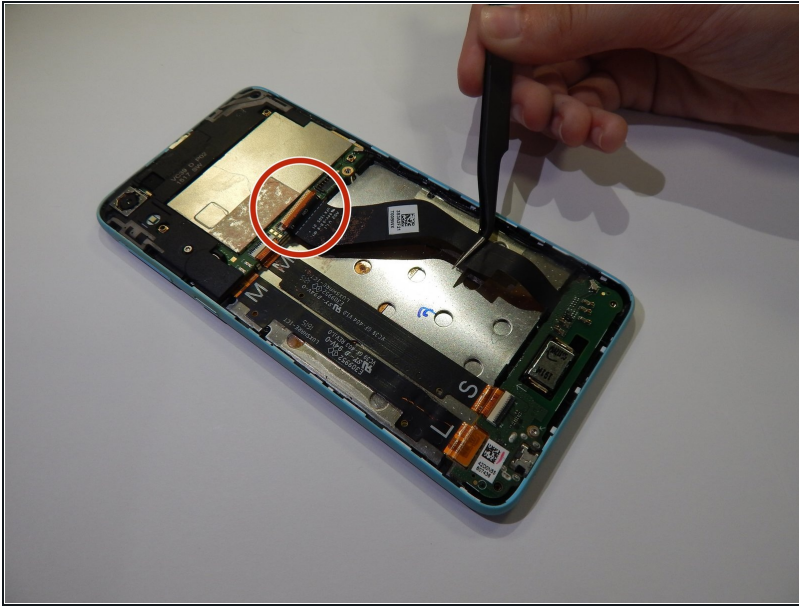

- Use [tweezers](#) to pry the wire up from the battery bed
- Detach the ribbon cable by pulling with the tweezers where circled in blue
- Flip the phone over so the screen side is facing up for the next step

Step 7

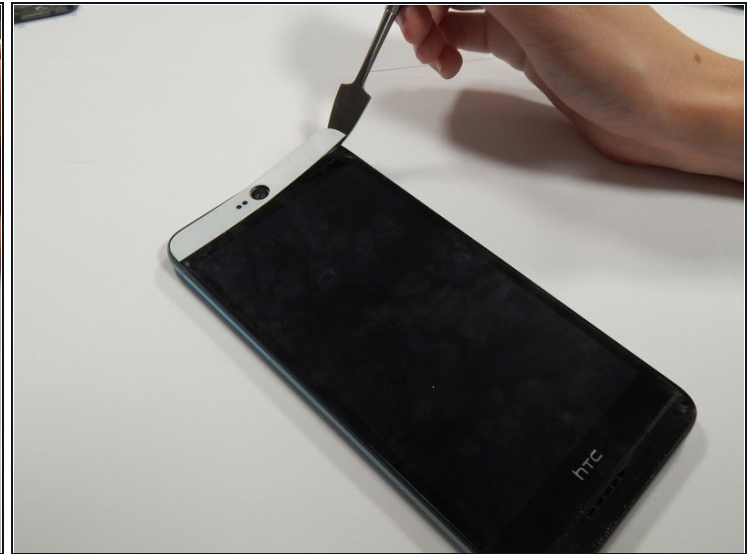

- Use the metal spudger to pry up the plastic cover pieces from the front of the phone

Step 8



- Pry up the edges of the screen using the metal spudger
 - Then use the suction cup to remove the screen from your device
- ⓘ There will likely be glue holding your screen in place, so keep prying but be cautious not to break the screen. You may want to use the [iOpener](#) to loosen the adhesive prior to removal.
-

To reassemble your device, follow these instructions in reverse order.