



Beats Solo 2 Wire Replacement

We are replacing the internal core wire to fix the right speaker not working.

Written By: Darien Jewel



INTRODUCTION

This repair is for when the right side of the headset does not work but the left side still works. The wire breaks from the hinges repeated movement over time. Please make sure to get a 1mm thick wire for the replacement so it will fit properly. Suggested part search terms: "Solo 2 HD internal wire".



TOOLS:

- [Portable Soldering Iron](#) (1)
- [Phillips #0 Screwdriver](#) (1)



PARTS:

- [New beats solo 2 wire.](#) (1)

Step 1 — Core Wire



- Pull out the wire from the beats. The wire is a jack wire and requires nothing special to remove.

Step 2




- Remove the ear cushions from the headset. The preferred method to do this is to use a screwdriver and pry the cushions off.

Step 3




- Remove the second cushion until both cushions are removed.

Step 4

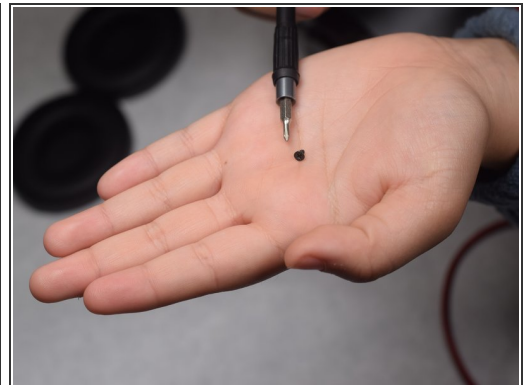

- Remove the screws from both ear bases.

Step 5

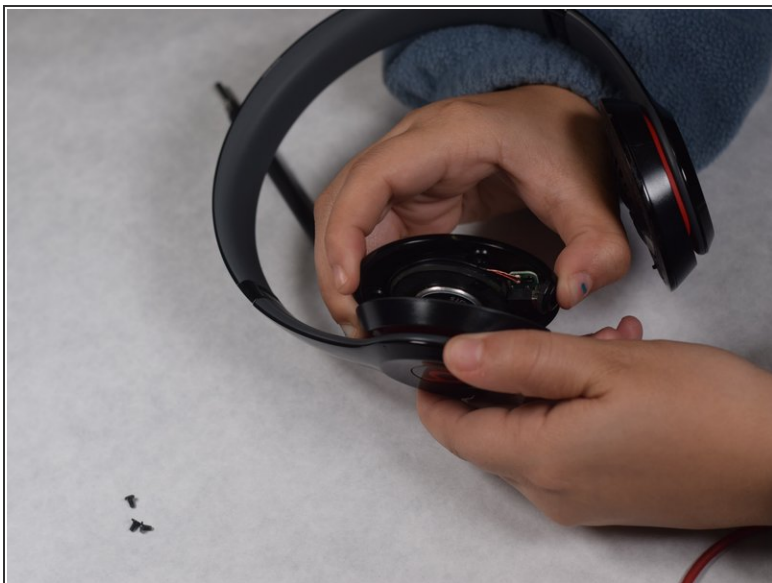


- Once the screws are removed, pop off the inner speakers. Do this for both sides

Step 6



- After you have removed the second internal speaker, you can begin the process of removing the wire. BE CAREFUL with this step, make sure you don't pull off the circuit board.

Step 7

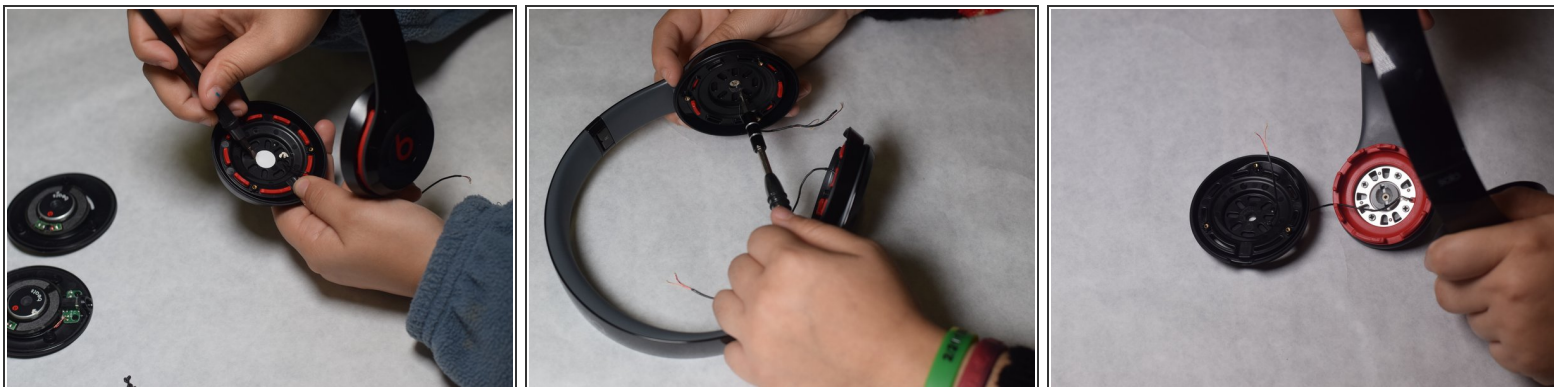

- Now we are going to remove the circuit board holder. Take off the white cover to get access to the screw. Then remove the screw and circuit board holder.

Step 8



- slowly pry away cover

To reassemble your device, follow these instructions in reverse order.