




HTC Desire 826 Back Camera Replacement

This guide will help you with replacing your...

Written By: Jordan Warnix

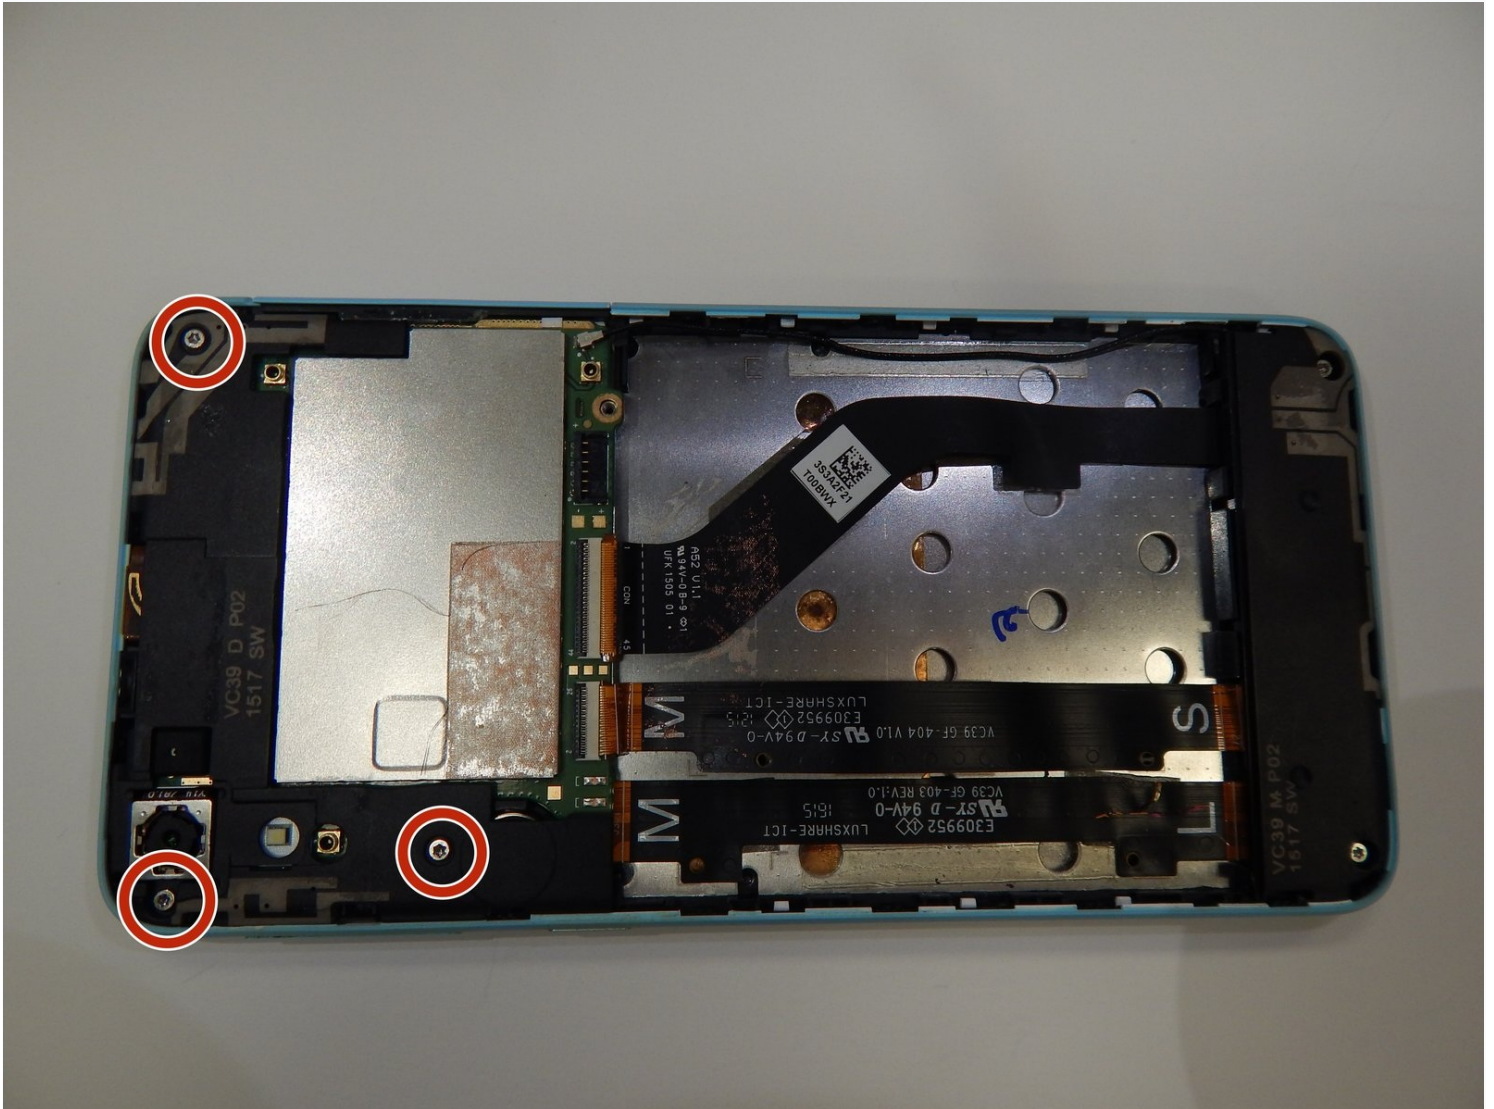

INTRODUCTION

This guide will help you with replacing your back camera of your HTC Desire 826.

TOOLS:

[T5 Torx Screwdriver](#) (1)

[Tweezers](#) (1)

[Magnetic Project Mat](#) (1)



[Spudger](#) (1)

Step 1 — Battery




- Find a seam in the back of the device.
 - Insert the plastic spudger into the seam and pry off the back panel.
- ⓘ There will be glue, so keep prying until it comes off or you may need to heat up the edges of the device to loosen the adhesive with the [iOpener](#).

Step 2

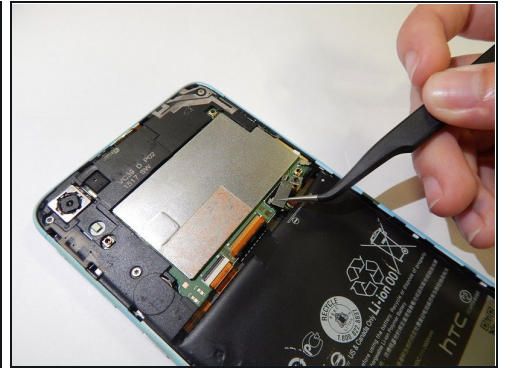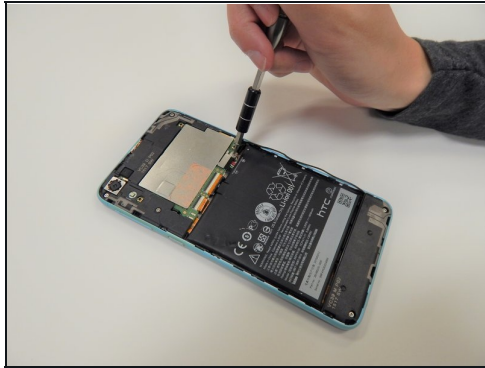


- Remove the 4.0 mm screw above the battery with a T5 Torx screwdriver.
- Remove the metal bracket with the tweezers.

Step 3

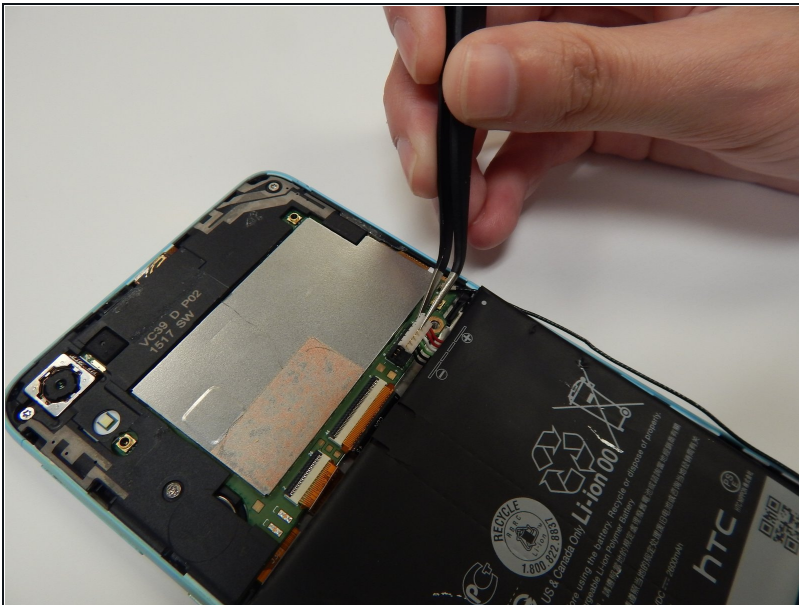




- Disconnect the battery cable from the motherboard with the tweezers.

Step 4

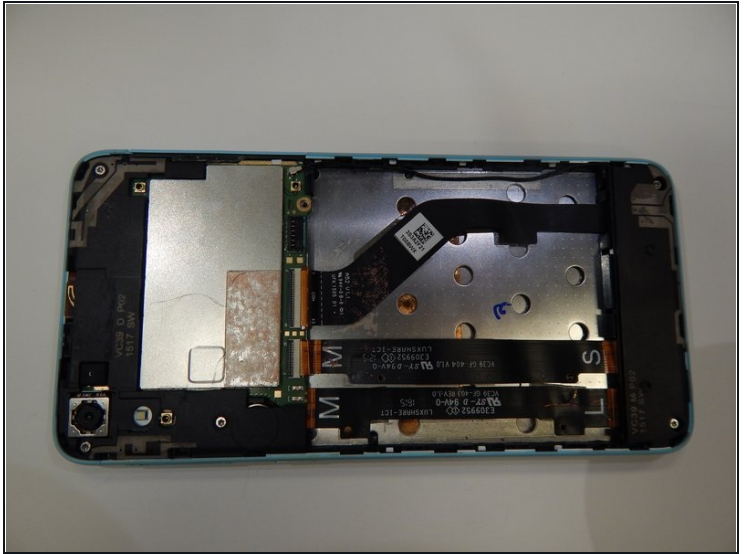


- Lift the battery with a plastic spudger and remove it from the device.

Step 5 — Back Camera

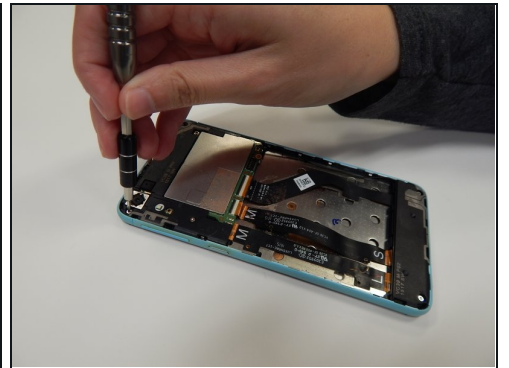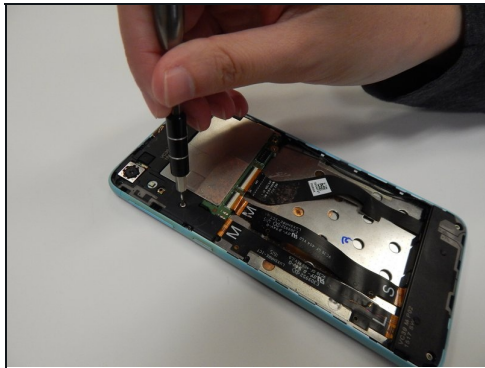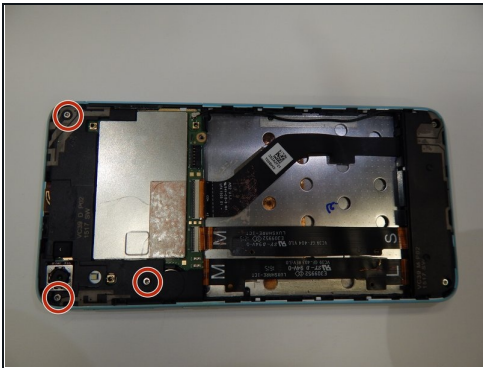




- Use a T5 Torx screwdriver to remove the three 4.0 mm screws.

Step 6

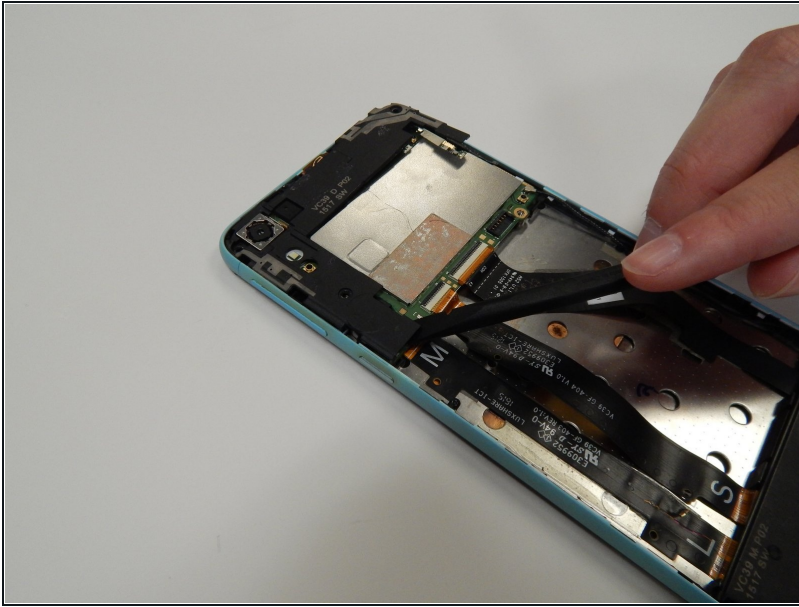

- Use the spudger to lift the black plastic covering.

Step 7

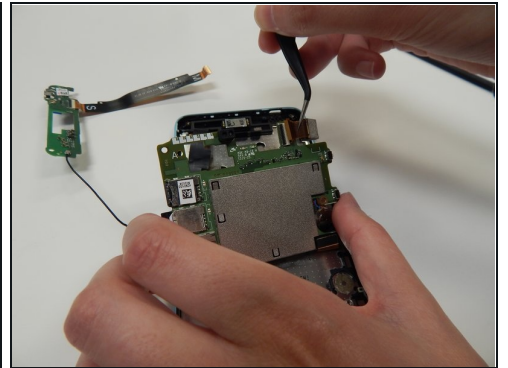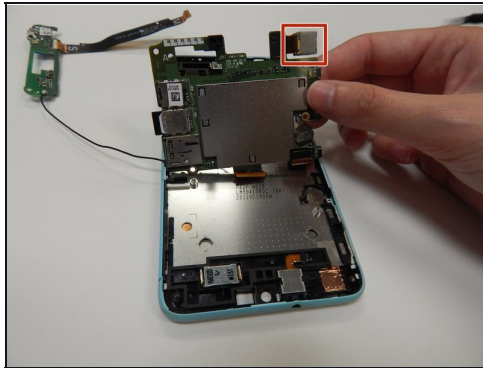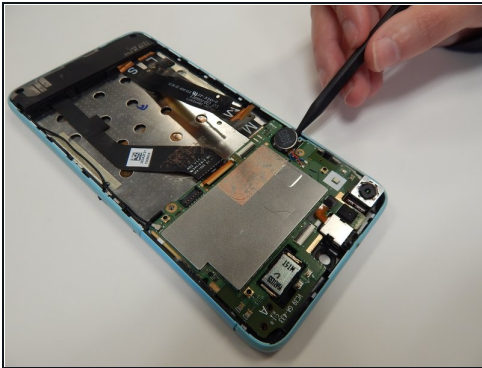

- Use the spudger to lift the green board. The back camera is attached on the side as shown.
- Use the tweezers to disconnect and remove the camera.

To reassemble your device, follow these instructions in reverse order.