




Sony Cyber-shot DSC-T9 Back Cover Replacement

This guide gives instructions on how to remove the back cover of the Sony Cyber-shot DSC-T9 camera.

Written By: Stephannie Allen

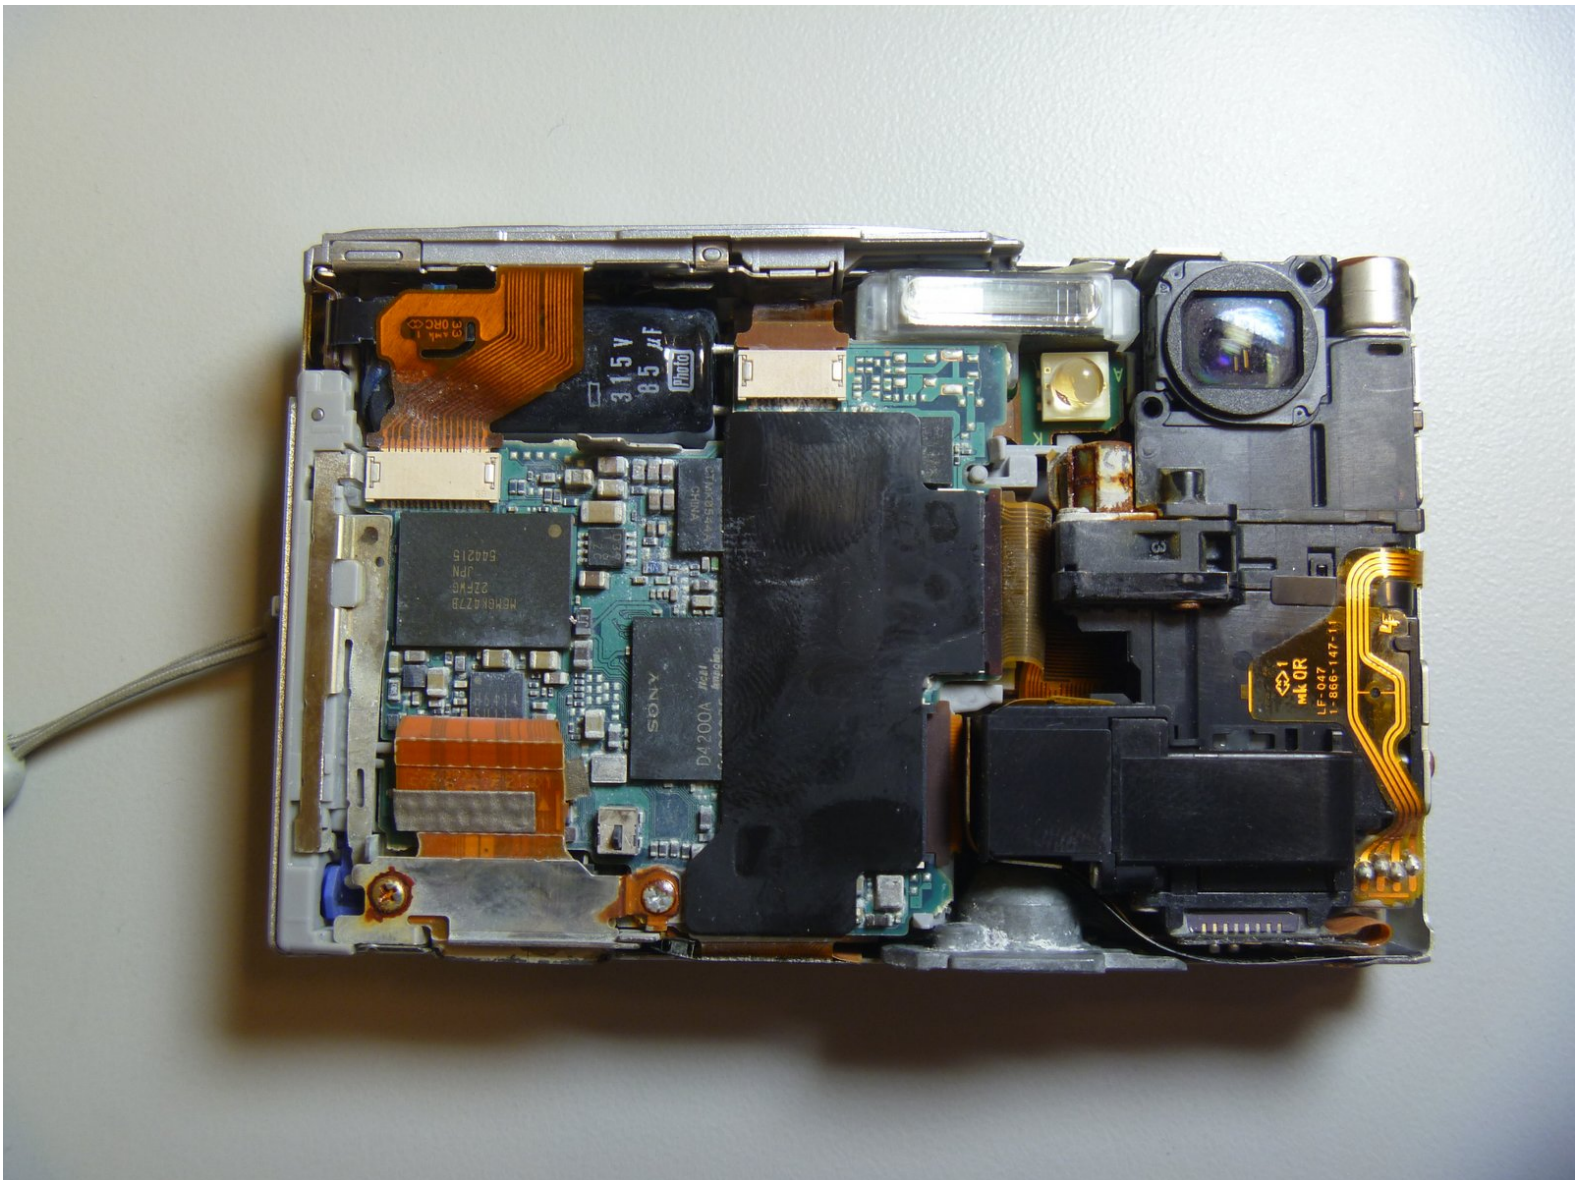

INTRODUCTION


The back cover needs to be removed for most other repair guides in order to access more parts within the camera.



TOOLS:


- [Phillips #00 Screwdriver](#) (1)
-

Step 1 — Battery

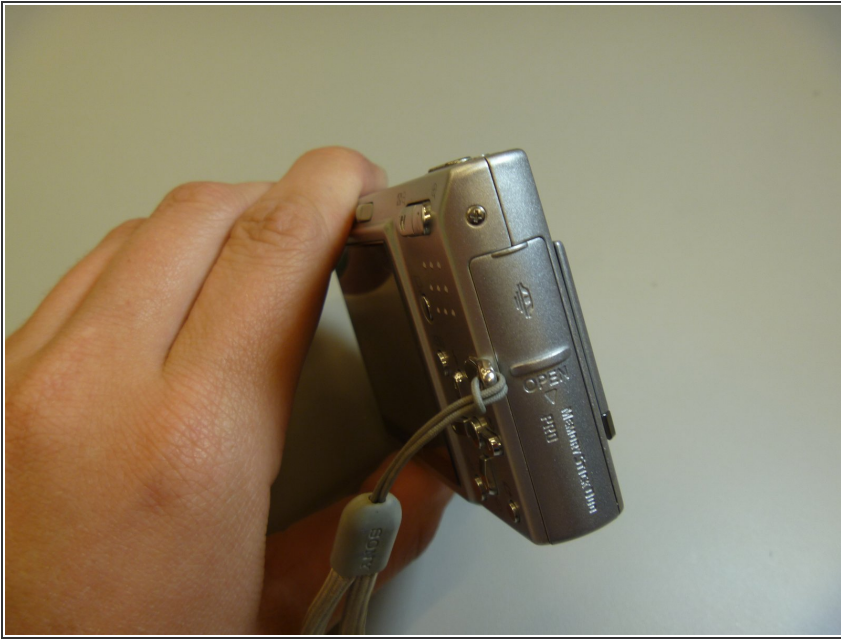

- The battery cover is located on the right side of the camera.
- Slide the cover to expose the battery.

Step 2

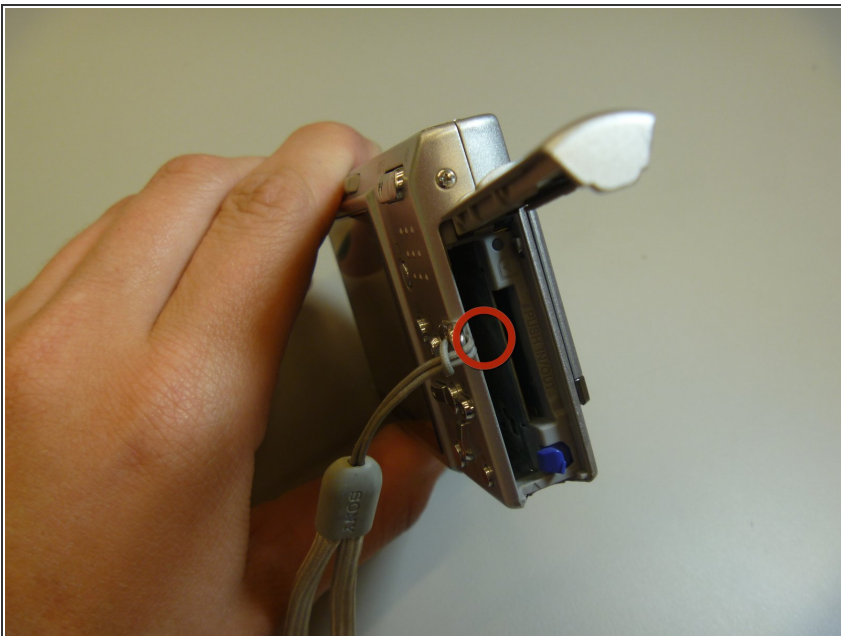

- Ensure that the battery lines up properly with the slot in the camera.
- Slide battery in.
- Slide cover closed.
- ⓘ Battery not shown

Step 3 — Front Cover




- Remove screws from outside of camera. There are 6 screws total.
- 3 screws on underside.
- 1 screw on right side, near battery cover.
- 2 screws on left side.

Step 4




- Use screwdriver to remove screws.

Step 5

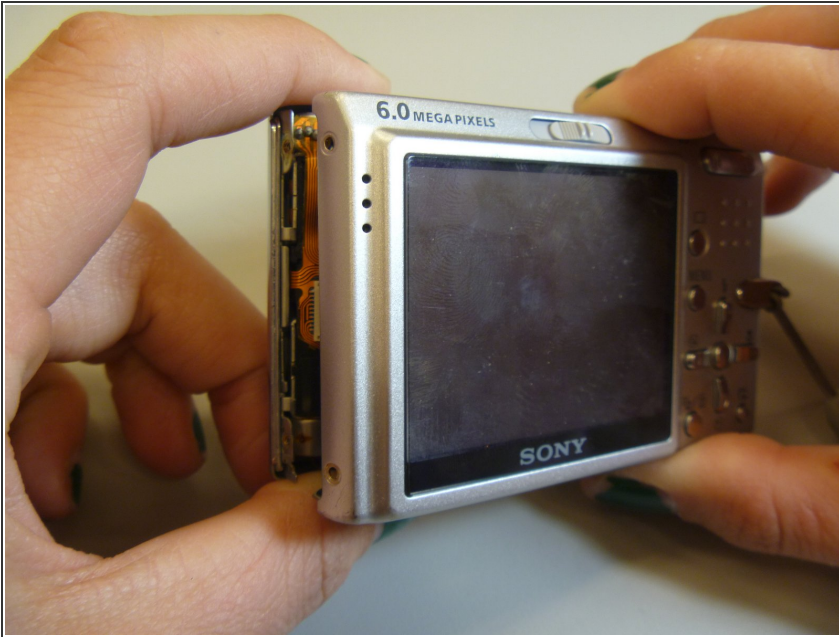


- Gently pull the front cover off of the main camera.
- All of the inner parts of the camera are attached to the back screen.

Step 6

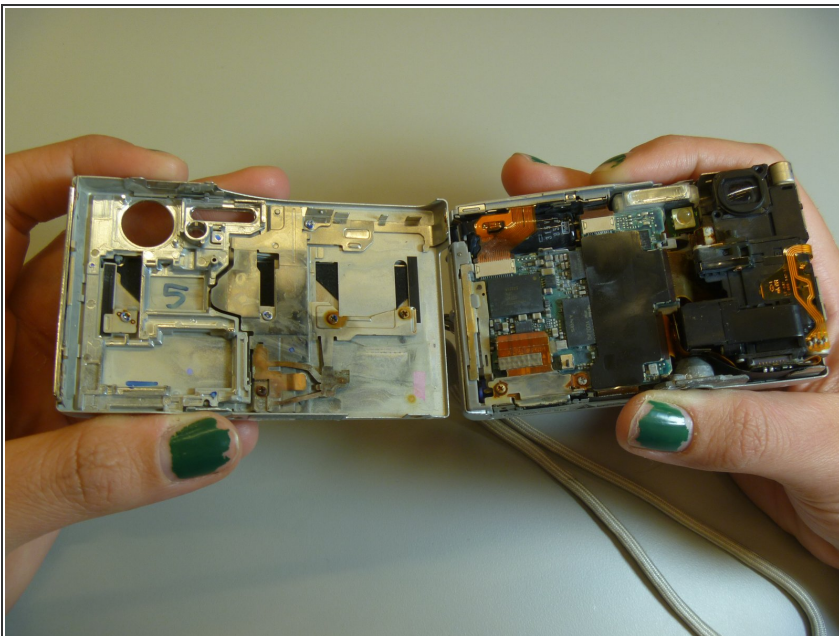


- The front cover is now removed from the camera and the internal hardware is now exposed.

Step 7 — Back Cover

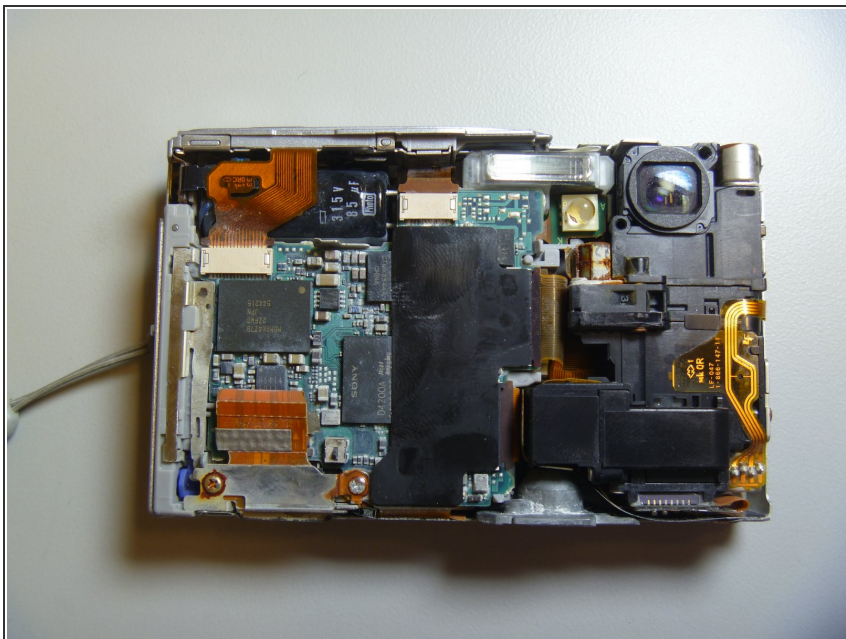

- This is the camera without the front cover.

Step 8

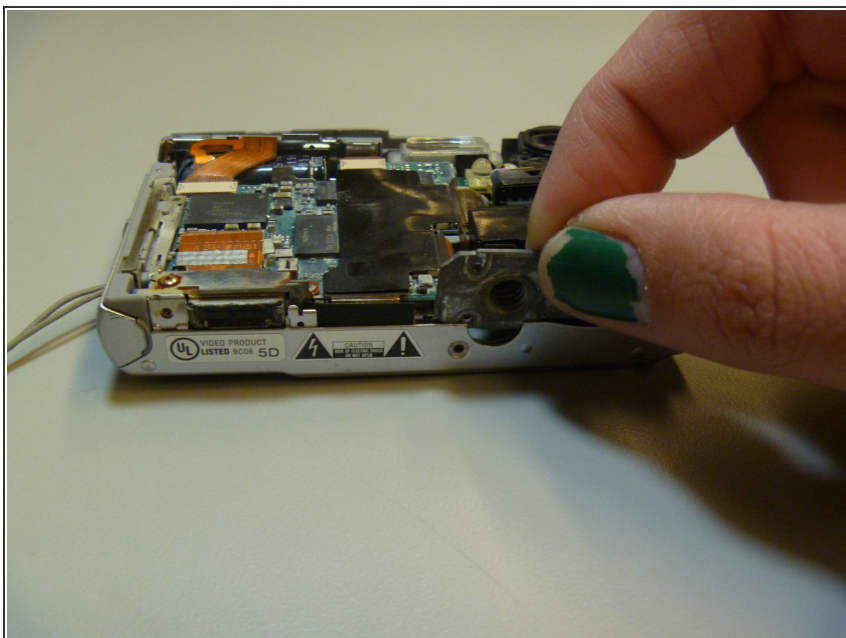


- Remove tripod piece located at the bottom of the camera. This piece should slide out with ease.

Step 9




- Slide open the top panel. This is located on the top of the camera, where the power button and shutter button are.

Step 10

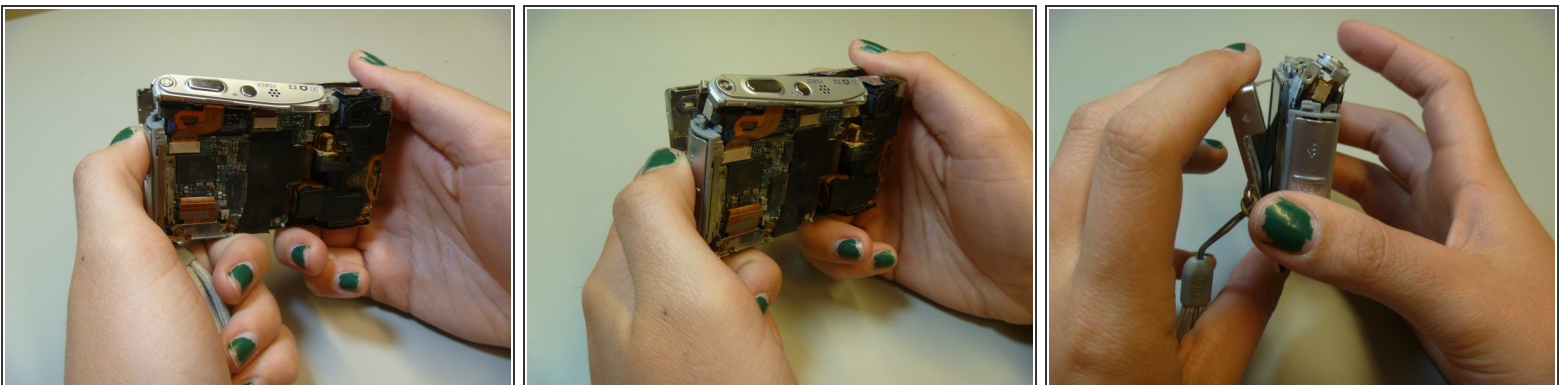


- Pull apart the inner hardware from the back case by prying on the left side.

Step 11

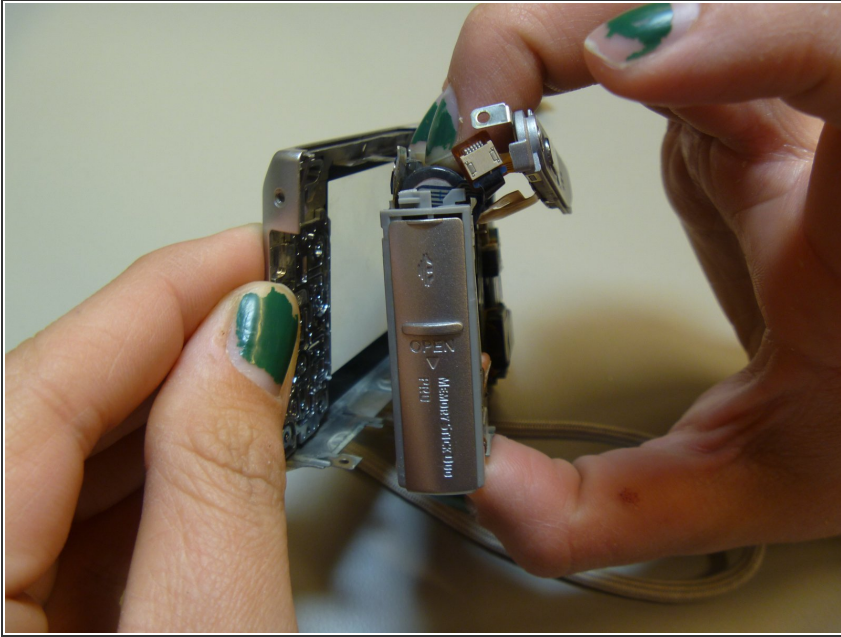

- Remove the back cover.

Step 12

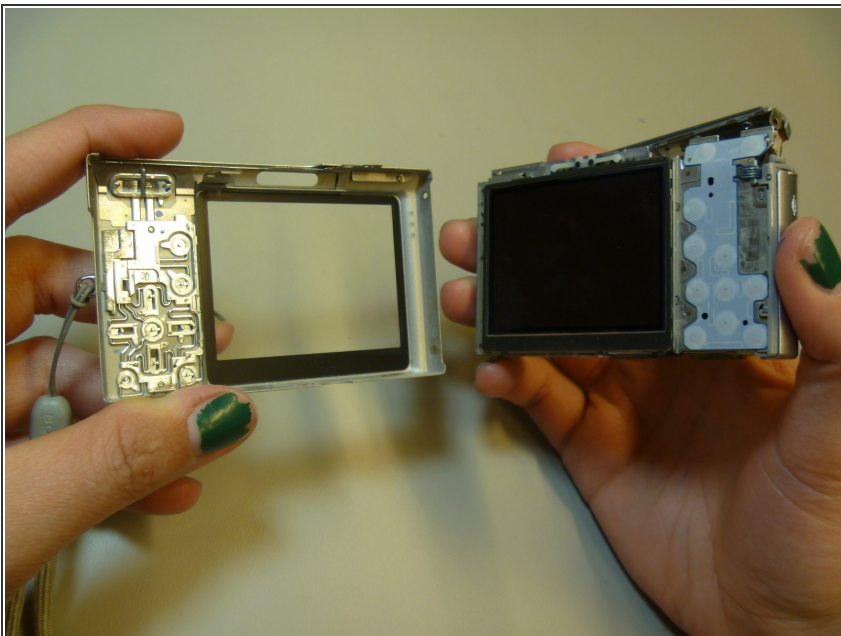

- The back cover is now removed from the internal hardware.

To reassemble your device, follow these instructions in reverse order.