




# HTC Desire 826 Motherboard Replacement

Written By: Savannah Nichole Harris

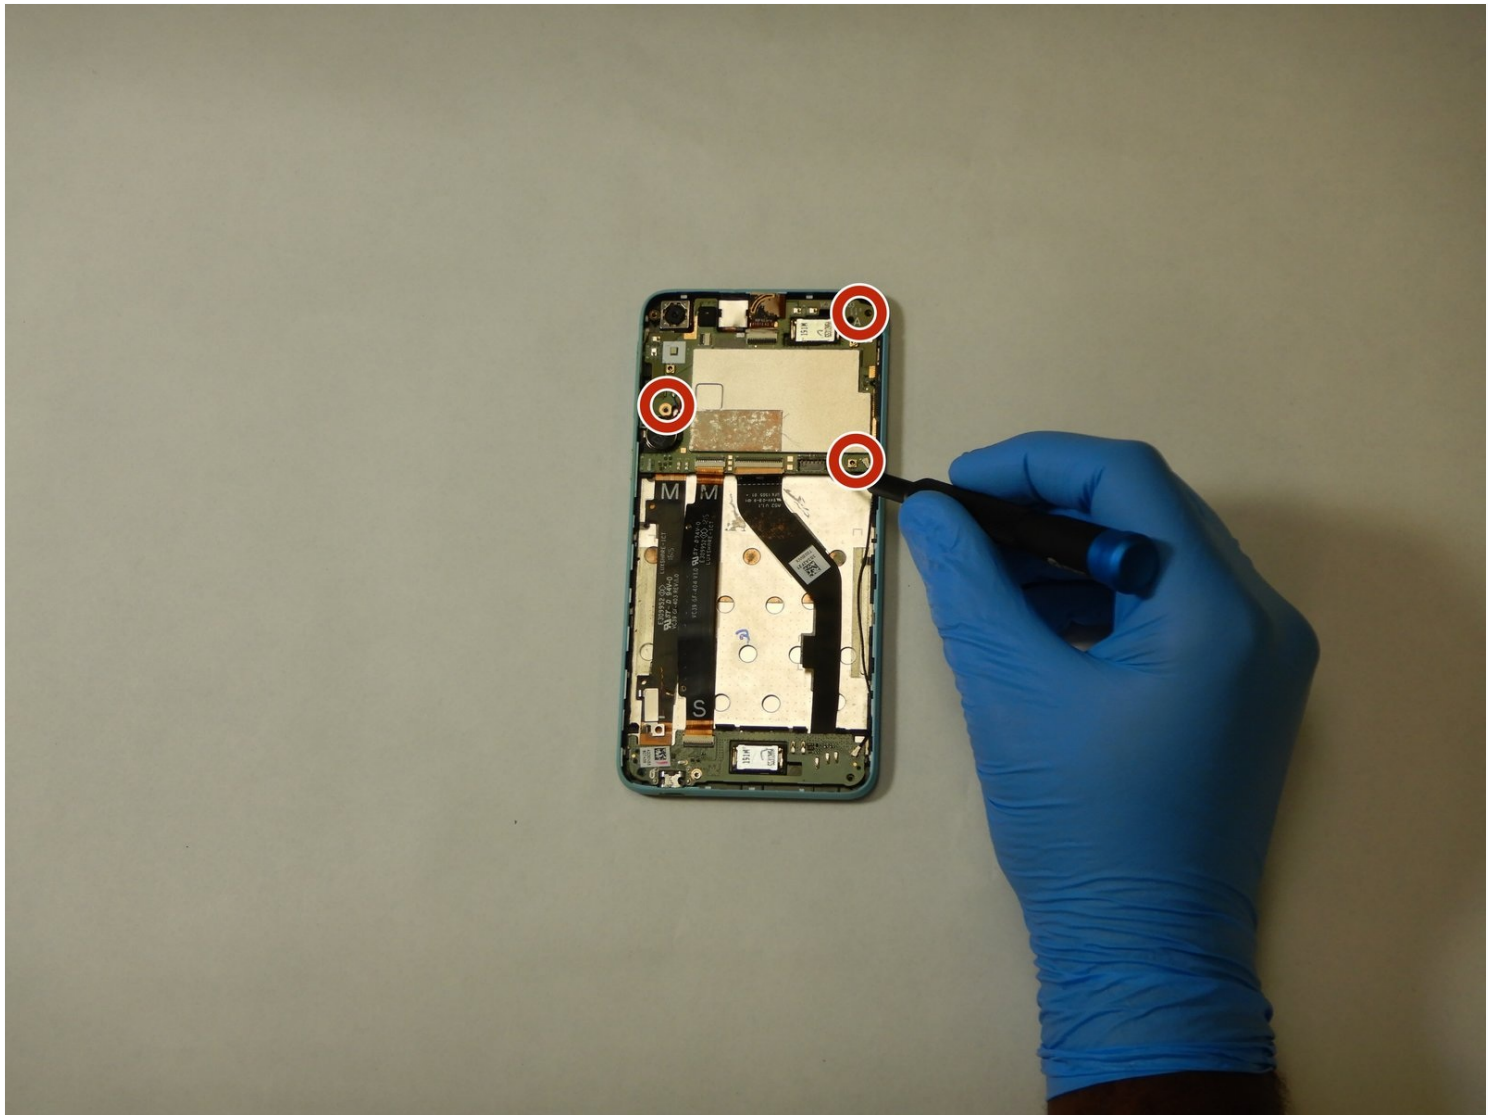

## TOOLS:

T5 Torx Screwdriver (1)  
Tweezers (1)  
Magnetic Project Mat (1)  
Spudger (1)

### Step 1 — Battery




- Find a seam in the back of the device.
- Insert the plastic spudger into the seam and pry off the back panel.
- ⓘ There will be glue, so keep prying until it comes off or you may need to heat up the edges of the device to loosen the adhesive with the [iOpener](#).

### Step 2




- Remove the 4.0 mm screw above the battery with a T5 Torx screwdriver.
- Remove the metal bracket with the tweezers.

### Step 3

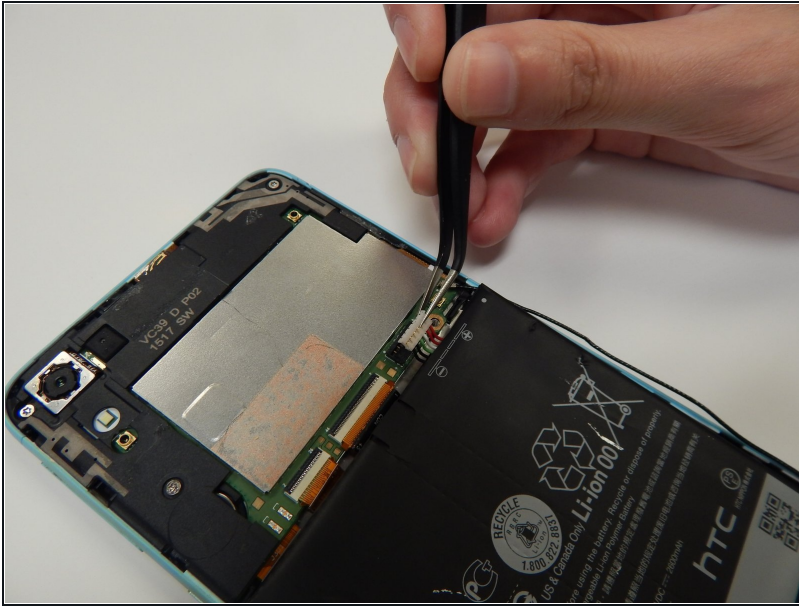

- Disconnect the battery cable from the motherboard with the tweezers.



### Step 4

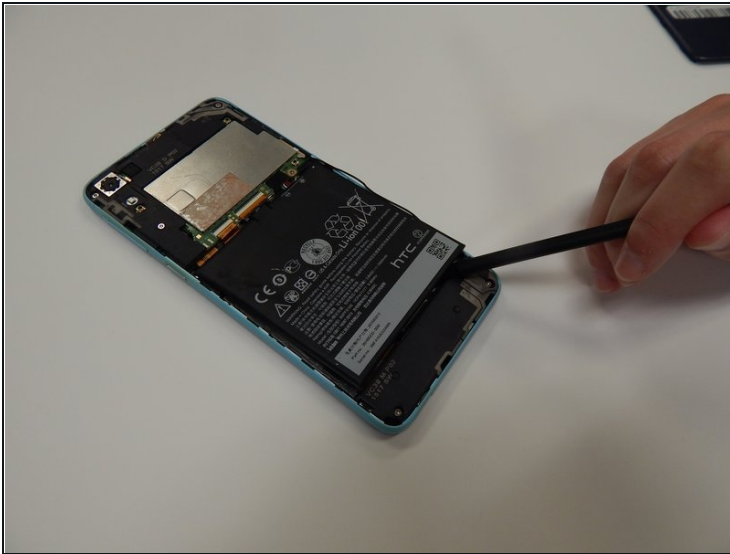

- Lift the battery with a plastic spudger and remove it from the device.





## Step 5 — Motherboard

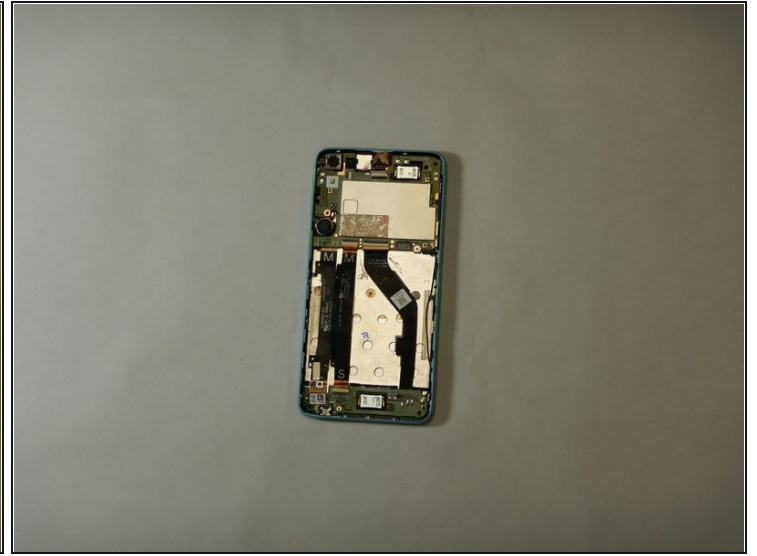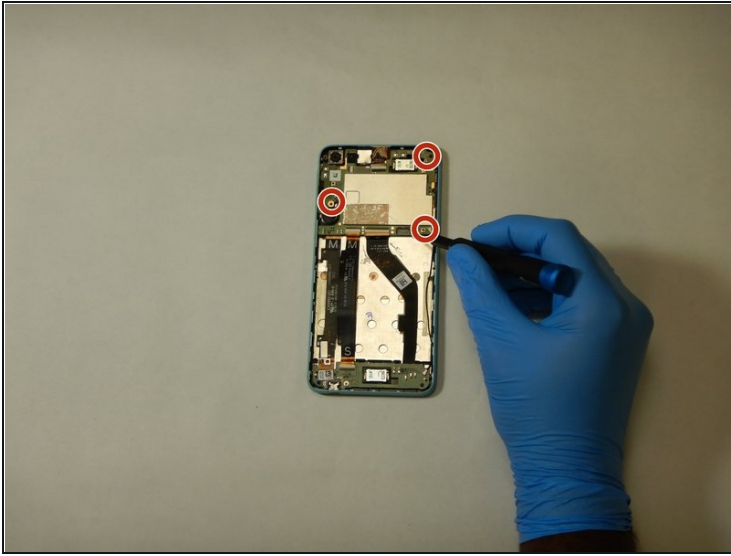

- Remove the three 4.0 mm T5 Torx screws connected to the motherboard.

## Step 6

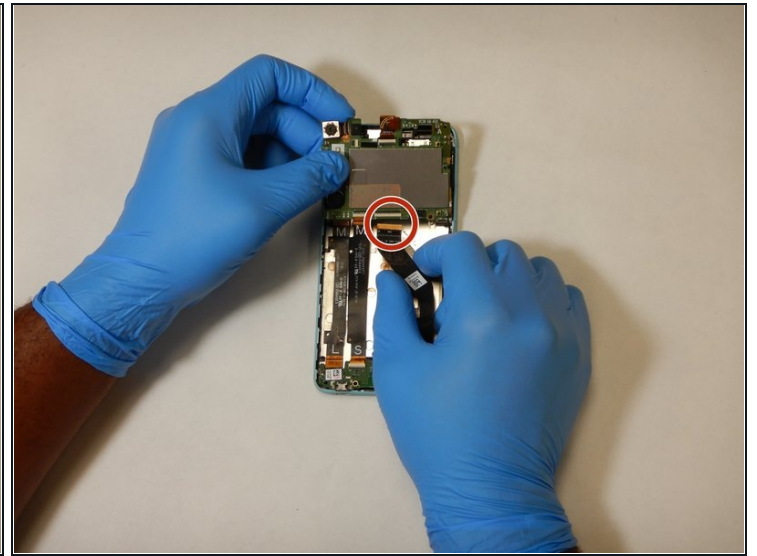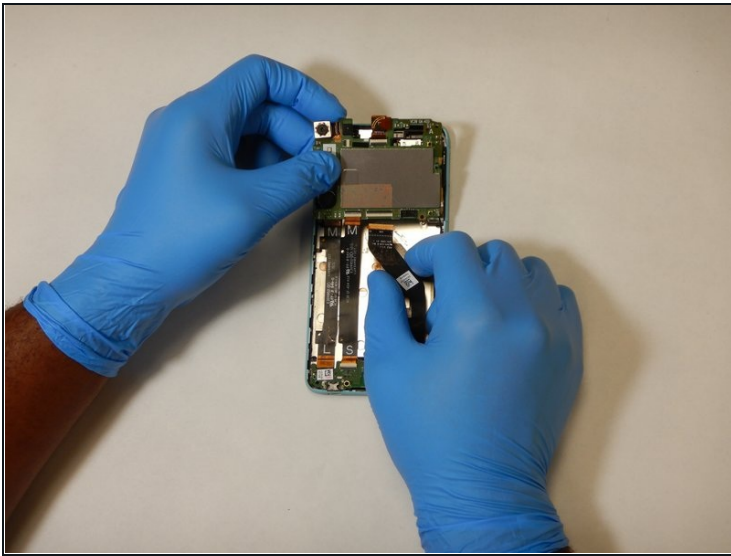

- Disconnect the ribbon cable from the motherboard by flipping up the locking tab with a spudger and pulling out the cable with your fingers.
- Lift the motherboard out of the frame, using a spudger to help pick up one of the edges.

---

To reassemble your device, follow these instructions in reverse order.

