




Audiovox CR8030iE5 Power Adapter Replacement

If the power adapter isn't working, install a...

Written By: Savannah Smith

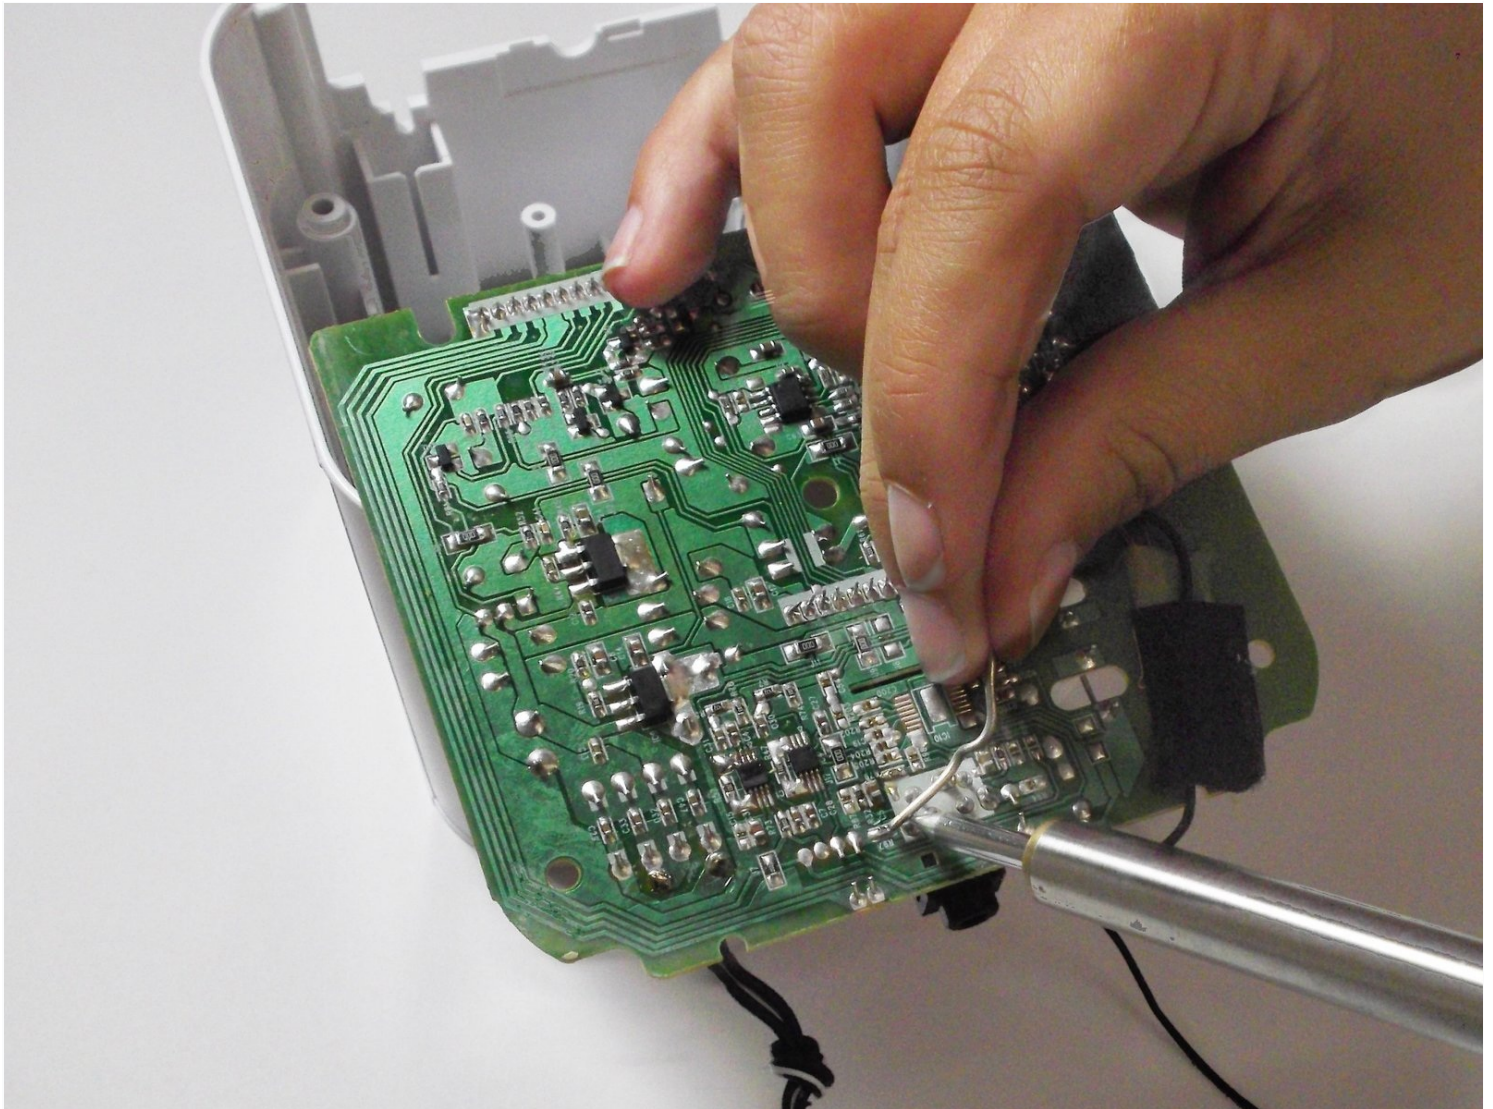

INTRODUCTION

If the power adapter isn't working, install a new one! This guide shows you how to change out an old power adapter that may not be working right.


Note: This guide involves soldering and should not be done by children. If you do not know how to solder, check out [How To Solder and Desolder Connections](#) to learn how before beginning this guide.

TOOLS:

[Phillips #1 Screwdriver](#) (1)

[Soldering Workstation](#) (1)

Step 1 — Top-Casing

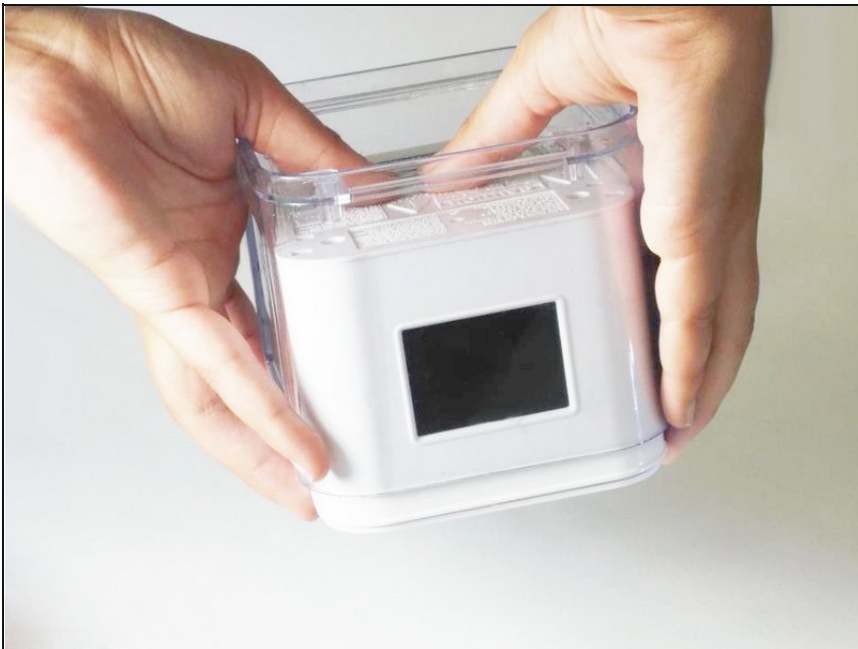

- Turn the device upside down.
- Apply constant pressure to the base of your Audiovox, while holding the plastic casing until the casing is completely removed.

Step 2



- Remove the four screws from the base using a Phillips #1 screwdriver.

Step 3




- Turn the device right-side up.
- Gently pull the top panel off of the device.

Step 4




- Using a Phillips #1 screwdriver, remove the screw found in the middle of the board.

Step 5

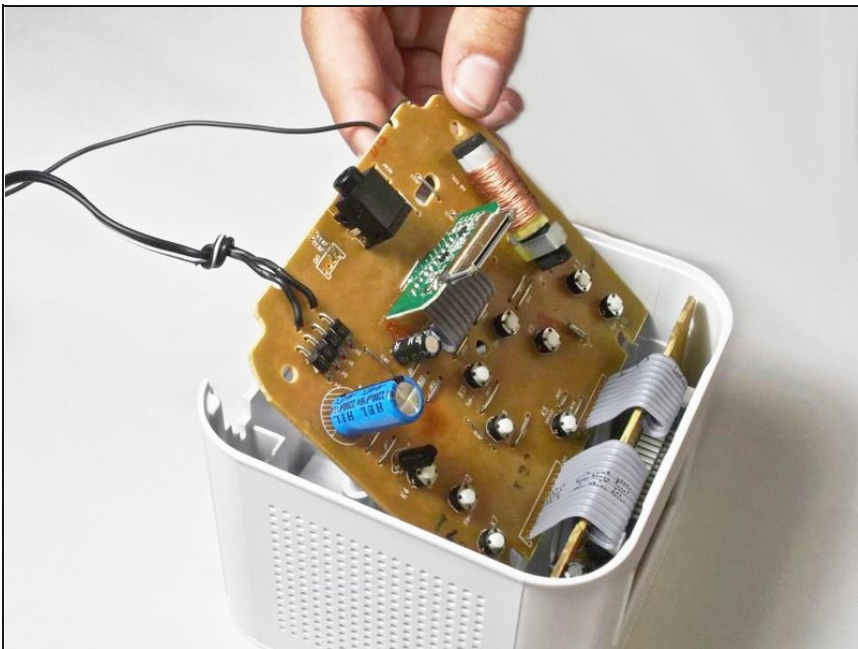


- Pull back the board gently to avoid disconnecting the attached wires.
- ① This allows you to view the soldered connections on the other side, and the internal components.

Step 6 — Power Adapter

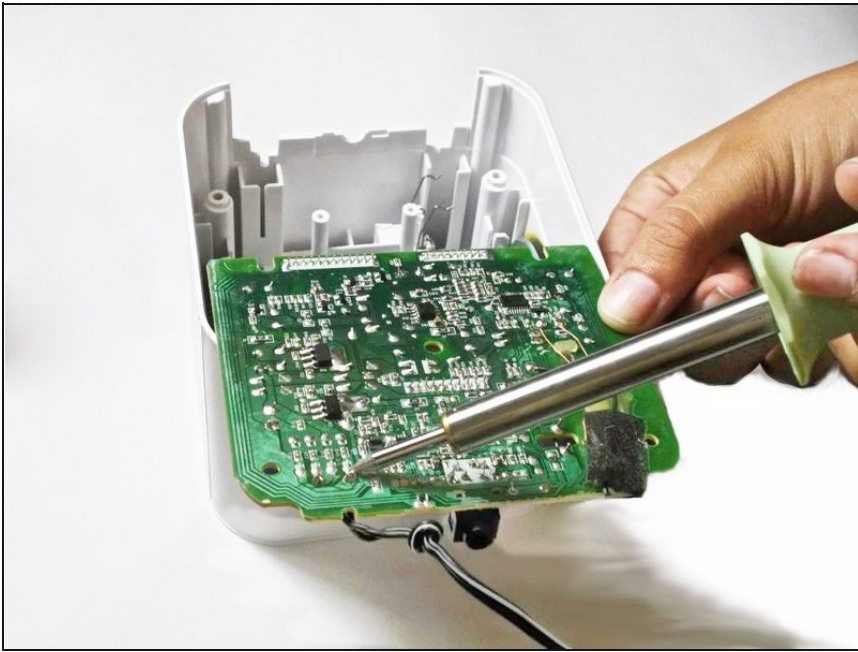

- One by one, de-solder the two wires that connect the power adapter to your Audiovox.
- ① If you don't know how to solder, check out [How To Solder and Desolder Connections](#).
- ⚠ Soldering irons are extremely hot and can burn you if you touch them!
- ⚠ If you hold the soldering iron tip at the same spot for too long, it can strip the metal from the plastic board. You may not be able to solder wire to that point again.

Step 7

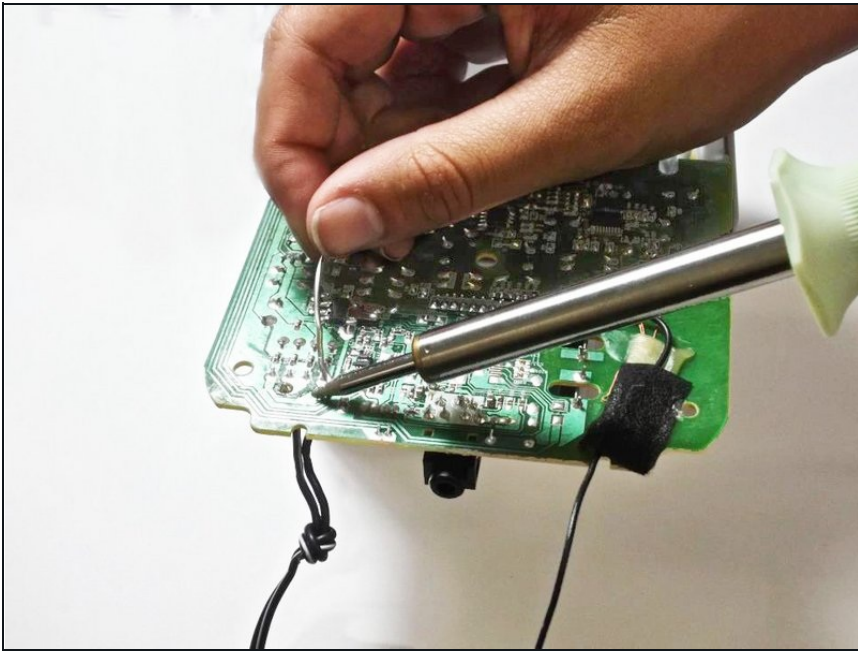

- Insert the wires of the new adapter into the designated holes and solder them into place.
- ① If you don't know how to solder, check out [How To Solder and Desolder Connections](#).

⚠ Soldering irons are extremely hot and can burn you if you touch them!

⚠ If you hold the soldering iron tip at the same spot for too long, it can strip the metal from the plastic board. You may not be able to solder wire to that point again.

To reassemble your device, follow these instructions in reverse order.