




Teenage Engineering OP-1 Connector Board Replacement

Use this guide to replace the Connector Board of the OP-1, including the microphone, the line-in / line-out connectors and the USB port.

Written By: teenage engineering

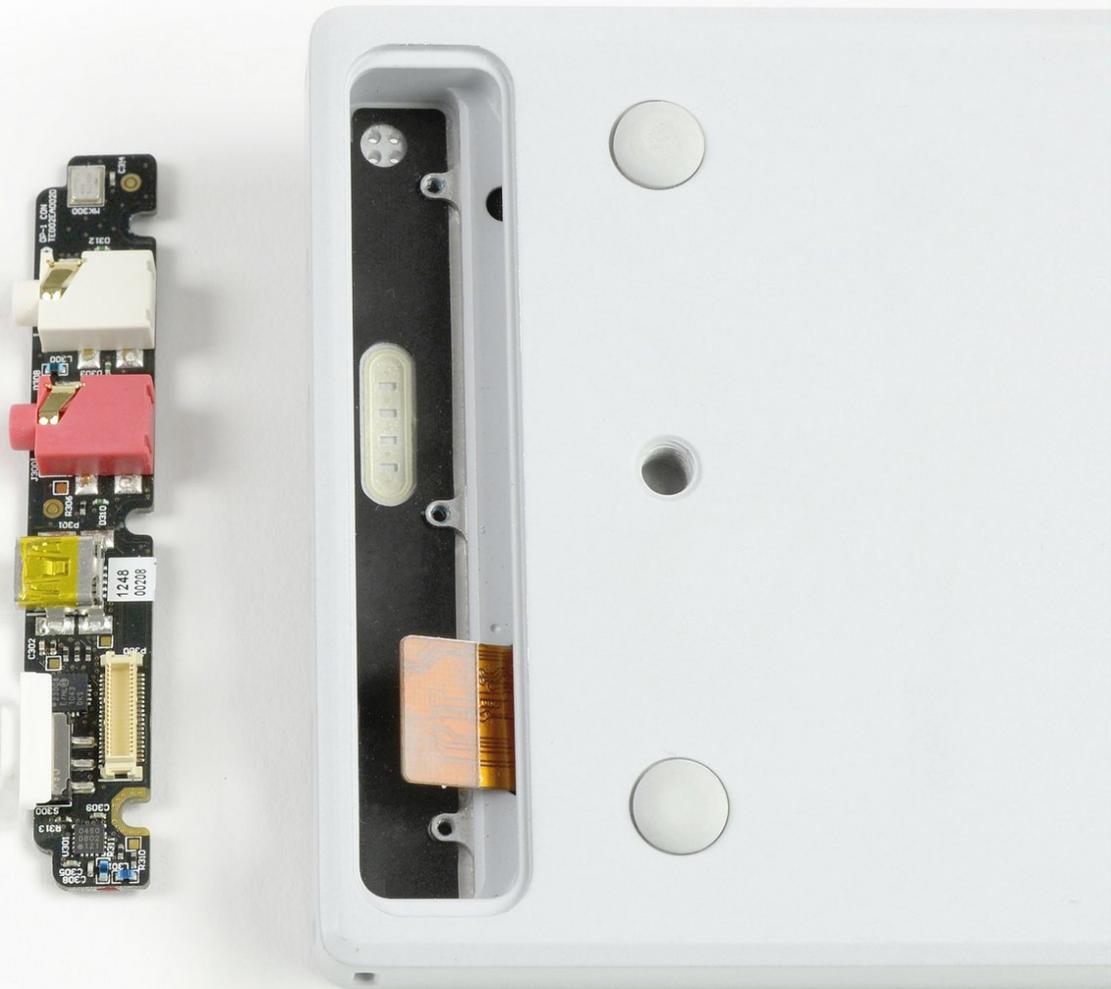

INTRODUCTION

Use this guide to replace the Connector Board of the OP-1, including the microphone, the line-in / line-out connectors and the USB port.

TOOLS:

- [Jimmy](#) (1)
- [Spudger](#) (1)
- [Phillips #00 Screwdriver](#) (1)

PARTS:

- [OP-1 Connector Board](#) (1)

Step 1 — Remove Back Panel




- Open the back panel by using a Jimmy on the side of the panel. Be careful not to damage the OP-1 coating.
- Lift the back panel and remove it. The Connector Board is revealed.

Step 2 — Remove Connector Board



- Disconnect the flex connector by lifting it up with a spudger.
- Remove the three Phillips screws. Do not lose the washer at the bottom screw.
- Take out the connector board.
- ⓘ Make sure to keep the black rubber pad underneath the board.

Step 3

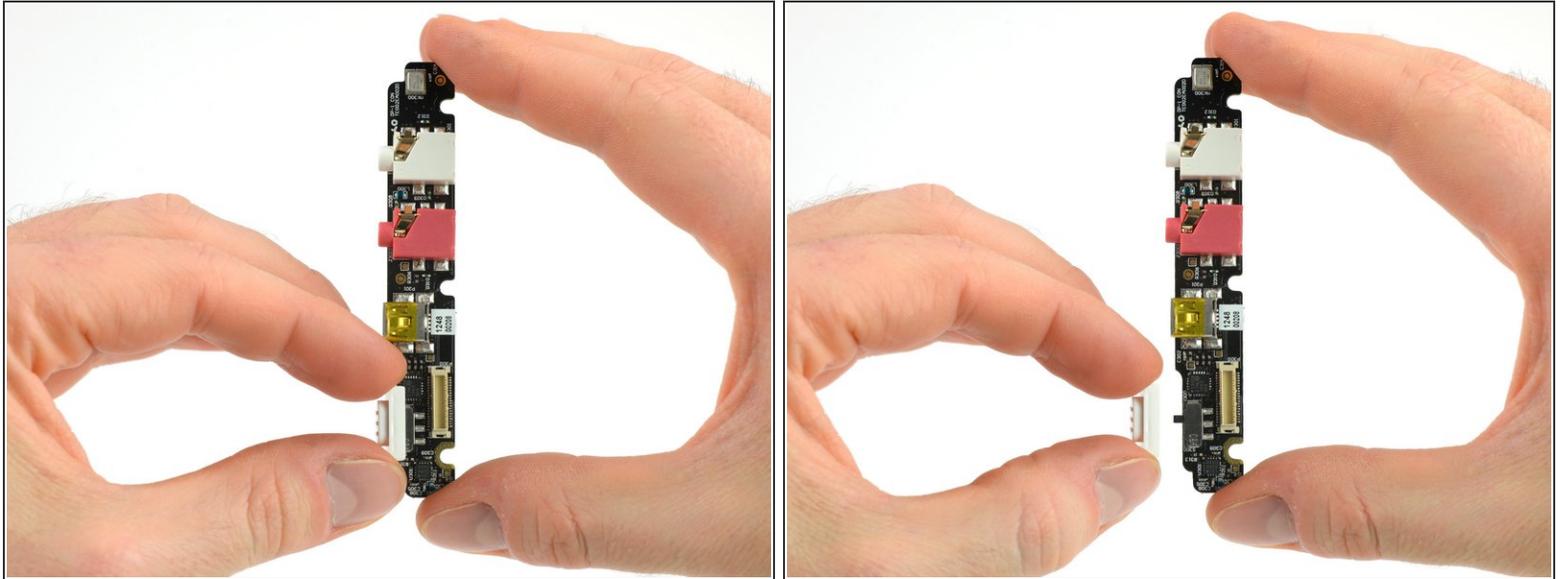

- Don't forget the cover for the on/off switch.
- Simply take it off from the old board and transfer it to the new board.

To reassemble your device, follow these instructions in reverse order.