

Asus Transformer T100 Button Module Replacement

All the buttons on the tablet are located in...

Written By: Taylor Pantiga



INTRODUCTION

All the buttons on the tablet are located in one corner. They are all controlled by a button module board, which can be removed if desired.

TOOLS:

Tweezers (1) iFixit Opening Tool (1) Spudger (1)

Step 1 — Rear Cover



- Separate the tablet from the base by pressing the large silver button below the tablet.
 The silver button is located at the base of the tablet.
- Remove the tablet by lifting up.




- Insert the opening tool into the seam of the tablet casing and gently pry upwards.
- With a little force, you will feel the clips release.

Step 3




- Slide the tool along all four edges of the tablet, making sure that all the clips are released.
- ⚠ Do not break these clips; otherwise, the screen will become less secure.

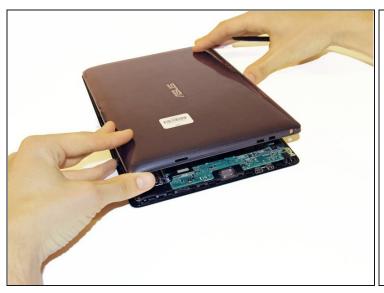



• Remove the rear casing.

Step 5 — Button Module

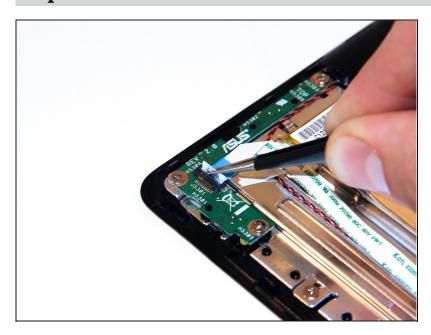


• Unclip the white connection clip using a pair of <u>tweezers</u>.



• Pull the connection apparatus from the connection clip on the board using a pair of tweezers.


Step 7

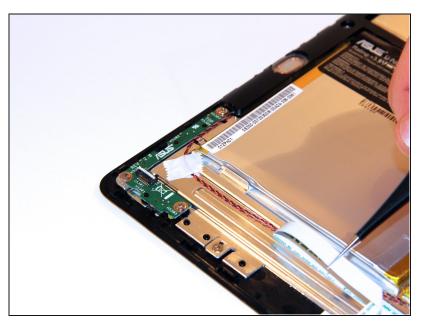

 Gently fold the connection apparatus back away from your work area.







- Remove the screws using a Phillips Head #1 screwdriver.
- Remove the power button module.

To reassemble your device, follow these instructions in reverse order.