




LG VX7000 Keypad Replacement

Written By: Nichole Shaw

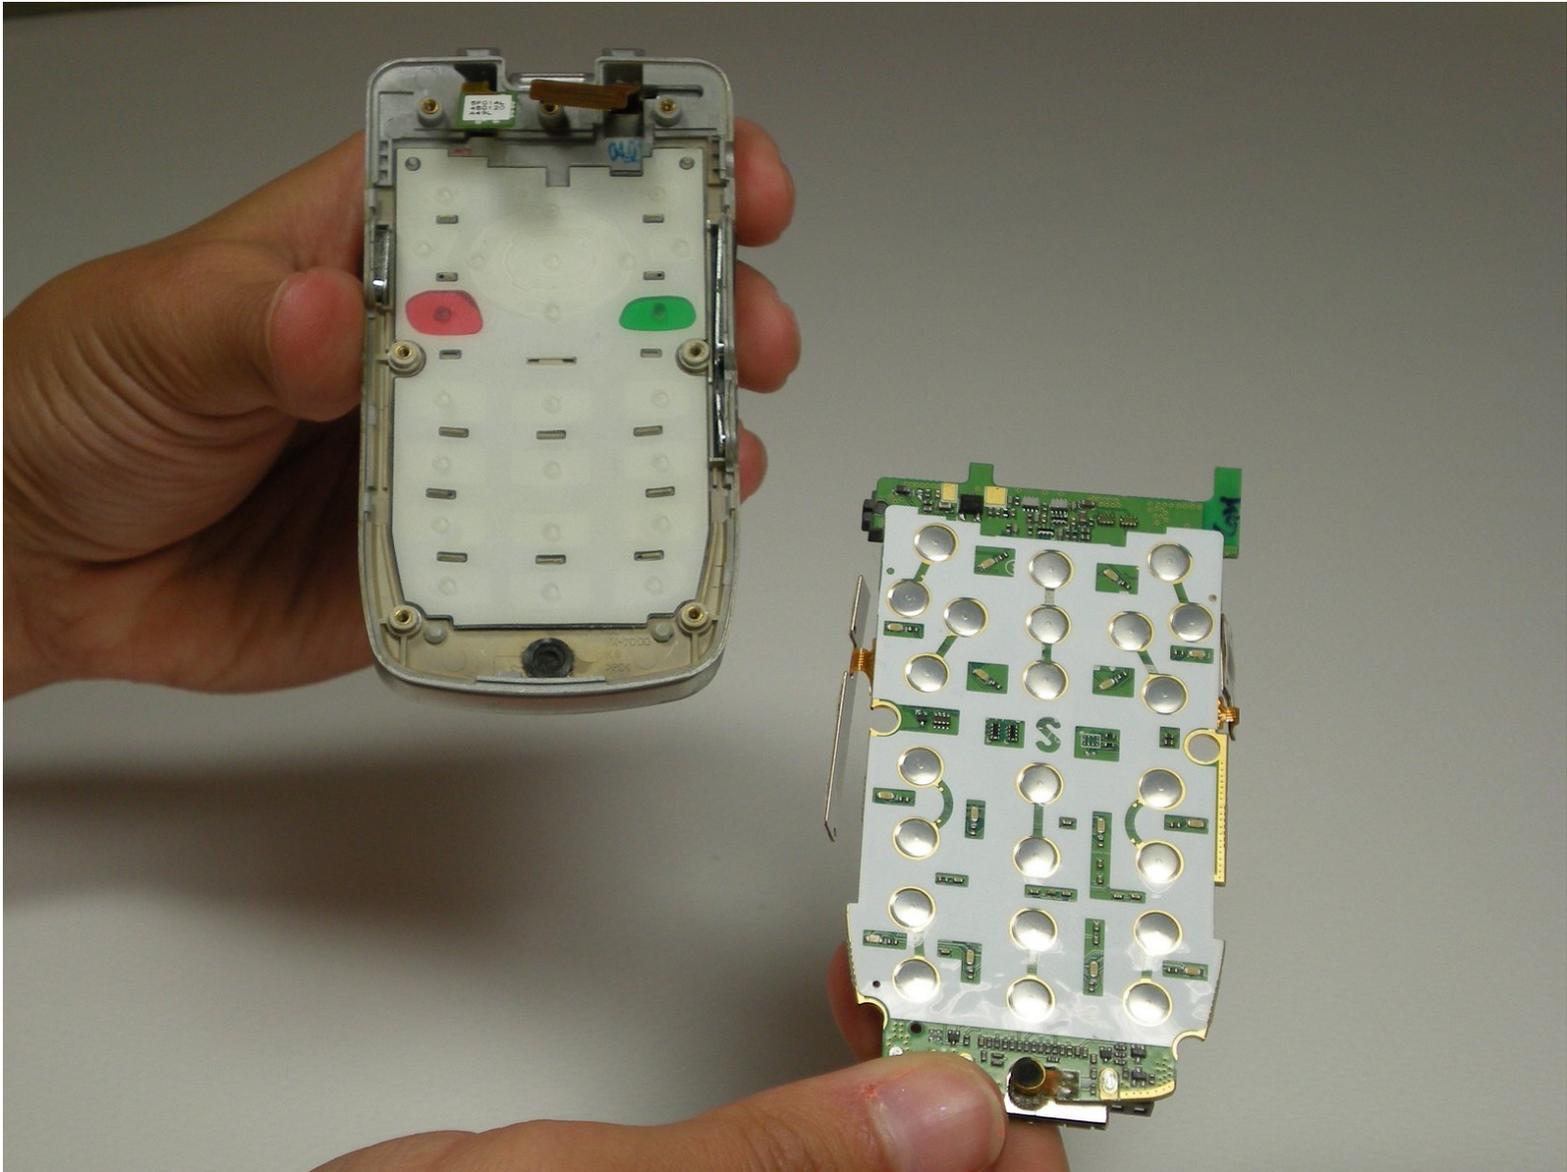

INTRODUCTION

Replace damaged keypad.

TOOLS:

- [Phillips #00 Screwdriver](#) (1)
-

Step 1 — Battery



- Lay the phone, screen side down, in your palm.
- Slide the grey button towards the top of the phone.

Step 2



- With the button unlocked, grab the battery on the sides and pull up, then slide the battery up to completely remove it from the phone.

Step 3 — Keypad




- Locate four screws underneath of the battery.
- Remove screws by turning counter clockwise with screwdriver until they pop out.

Step 4




- Place fingers on bottom of phone near charger adapter and pry back half of bottom apart.
- ⓘ Note: There will be a significant amount of resistance.

Step 5

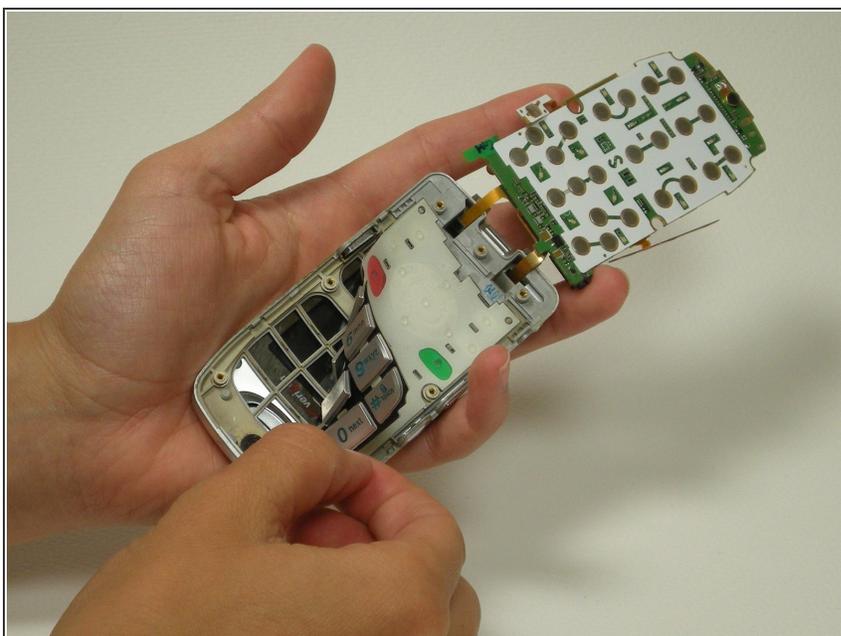

- Lift up logic board without completely removing from phone.
- Remove entire keypad from beneath the logic board.

Step 6

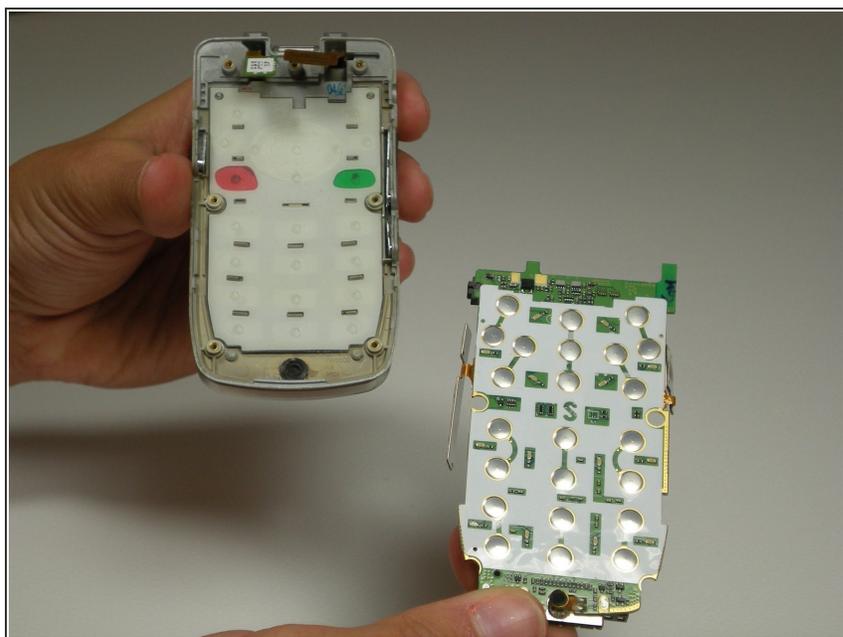

- Insert replacement keypad with buttons aligned in proper holes.

To reassemble your device, follow these instructions in reverse order.