



# Motorola Triumph Camera Replacement

This guide details the process of removing the...

Written By: greg



---

## INTRODUCTION

This guide details the process of removing the camera from an Motorola Triumph. Installation of the camera can be accomplished by reversing the process.

---

### TOOLS:

- [T4 Torx Screwdriver](#) (1)
  - [T5 Torx Screwdriver](#) (1)
  - [Spudger](#) (1)
-

## Step 1 — Battery



- Slide the back cover down.
- Lift the back cover up.
- Pry the battery out with the spudger

## Step 2



- Gently pry out the battery using the spudger

## Step 3 — Speakers



- After removing the Battery remove the two screws with a T4 screwdriver.

## Step 4



- With the spudger, go around the seam of the phone and pry away the back chassis.

## Step 5



- Using the T5 screwdriver, remove all the four screws shown in the picture.

## Step 6



- Lift up the motherboard out of the device,



## Step 7




- Pry the speakers out using the plastic spudger.

## Step 8 — Camera



- Locate the camera at the top of the motherboard.

## Step 9

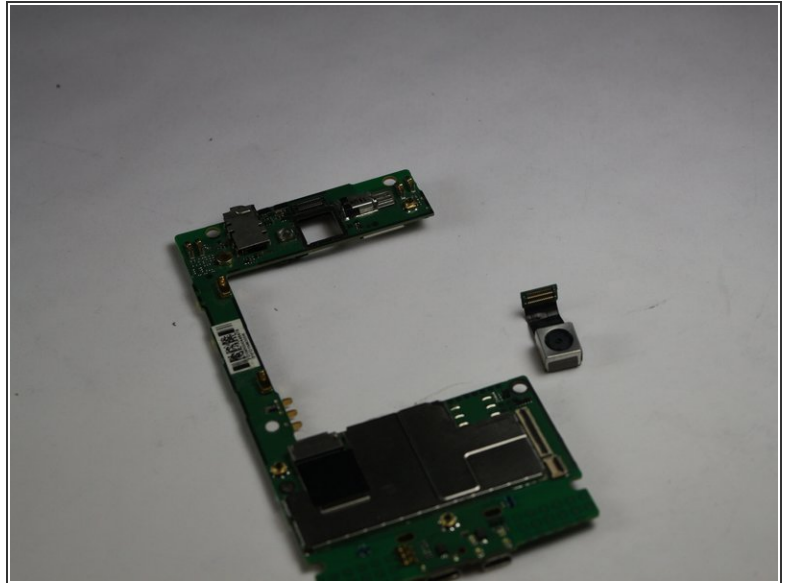

- Use the the spudger to unclip the connector above the camera.
- Remove the camera.

To reassemble your device, follow these instructions in reverse order.