


# **Asus X200MA Wireless Card Replacement**

Written By: Vanessa Garcia

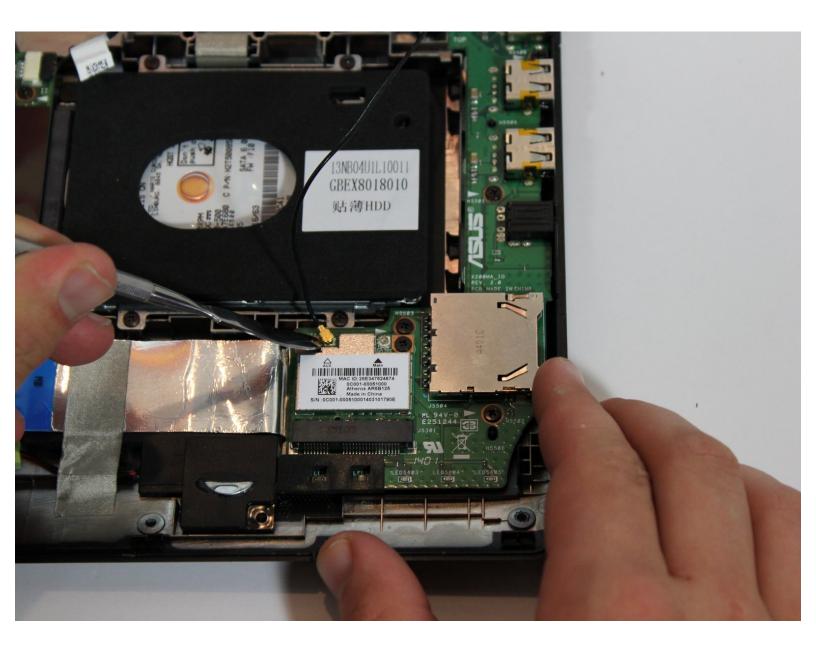

# **TOOLS:**

۶

- Phillips #0 Screwdriver (1)
- Spudger (1)

#### Step 1 — Back Panel



- Remove the following six screws:
  - Six 4 mm screws using a Phillips #0 screwdriver.
- Remove the following one screw:
  - One 14 mm screw using a Phillips #0 screwdriver.
- The 14mm screw goes in the center.

#### Step 2




 Use a plastic or metal spudger to separate the keyboard from the back panel and lift the keyboard out of place.

## Step 3 — Wireless Card



 Take gold cap that connects to a black wire off using the metal spudger.

## Step 4

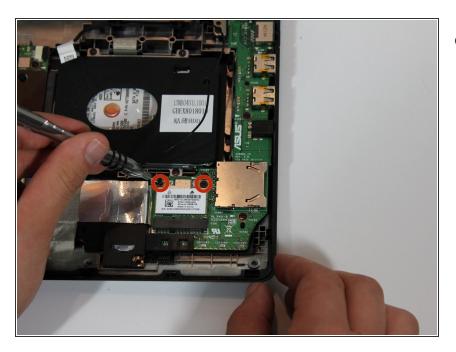

- Remove the following two screws:
  - Two 4 mm screws using Phillips #0 screwdriver.

## Step 5



• Slide the component up and out.

To reassemble your device, follow these instructions in reverse order.