



Samsung Galaxy S5 Mini Daughterboard Replacement

Written By: Sophia



INTRODUCTION

[video: <https://www.youtube.com/watch?v=wlvOGyqBYM0>]



TOOLS:

- [Heat Gun](#) (1)
- [Spudger](#) (1)
- [Tweezers](#) (1)
- [Phillips #00 Screwdriver](#) (1)
- [iFixit Opening Picks set of 6](#) (1)



PARTS:

- [Samsung Galaxy S5 Mini daughter](#) (1)
- [Samsung Galaxy S5 Mini screen sticker](#) (1)

Step 1 — Daughterboard



- Remove battery cover.

Step 2



- Remove battery. If you have the SIM card and SD card in, remove them by the way.

Step 3



- Open this small cover and release the home button flex connector.

Step 4



- Heat up the screen, cut the sticker and release the LCD screen connector carefully.

Step 5





- Remove LCD screen.

Step 6



- Remove all the screws.

Step 7

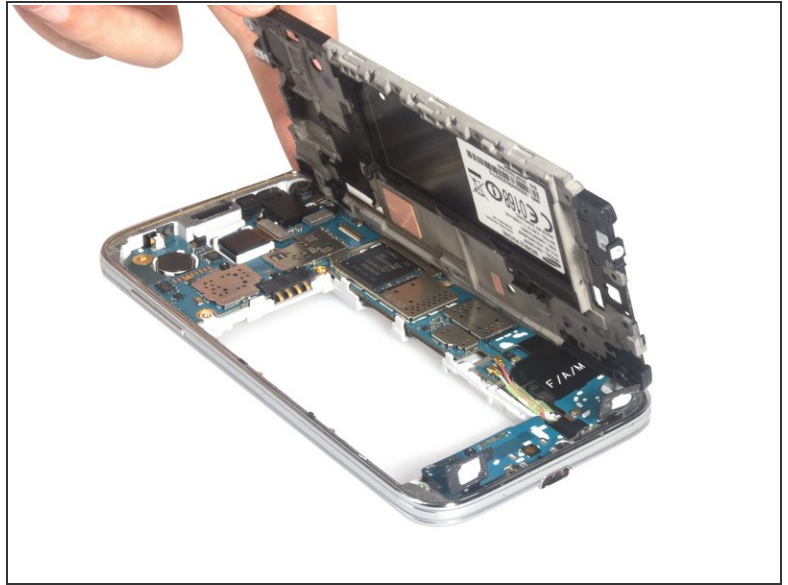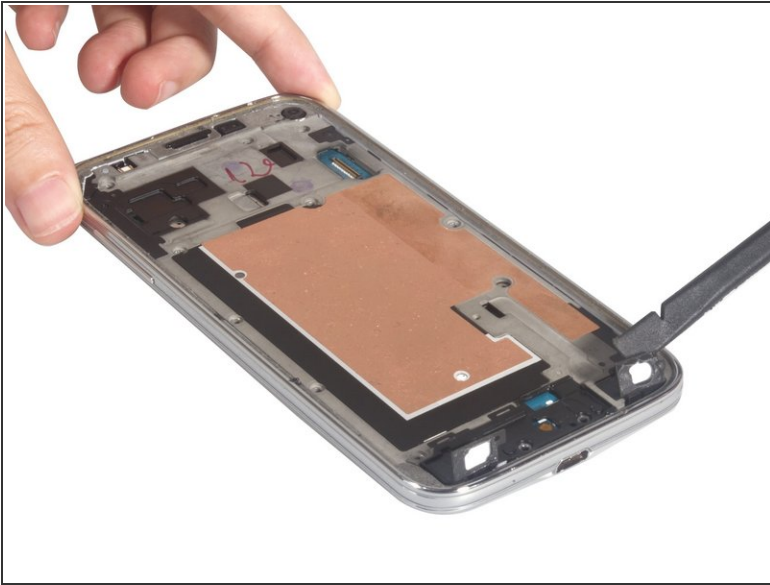



- Remove mid-plate.

Step 8



- Remove screw, release USB board flex connector and antenna cable connectors.

Step 9

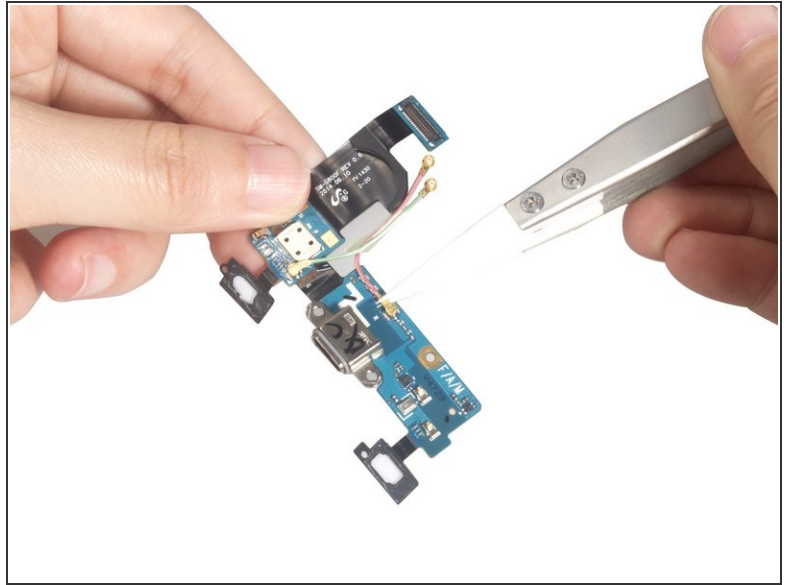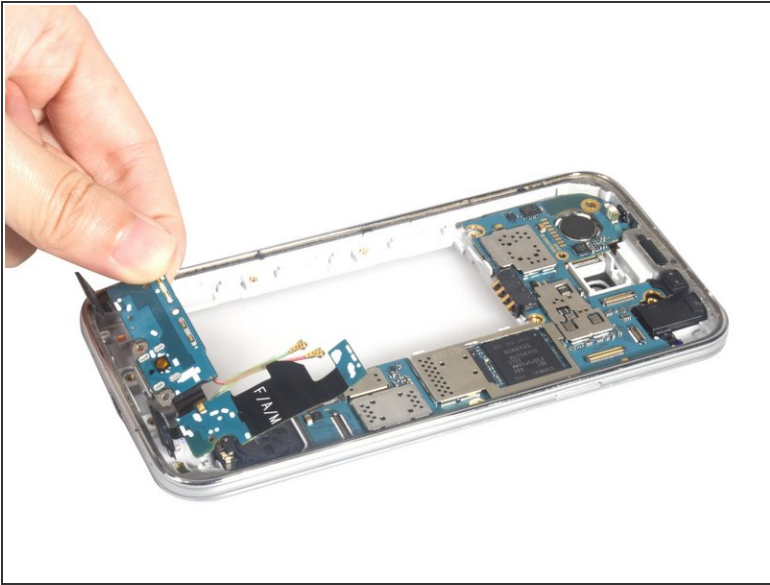

- Remove the daughterboard and clean the signal cables from assembly. And you can replace the new USB charging board for Samsung Galaxy S5 Mini.

To reassemble your device, follow these instructions in reverse order.