



Lenovo ThinkPad T500 Screen Replacement

Written By: nicO Gurney



 **TOOLS:**

Phillips #0 Screwdriver (1)

Spudger (1)

Step 1 — Screen



- Remove the eight 14mm screws using the Phillips #0 Screwdriver.


Step 2



- Lift the palm rest panel up.

⚠ Be sure to lift the panel **slowly**; there is a ribbon cable attached to the bottom.

Step 3

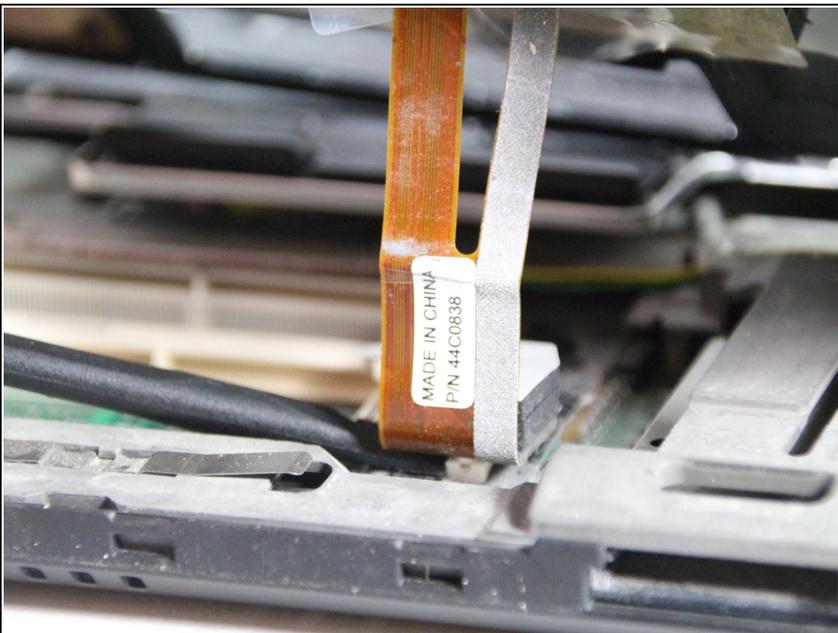

- Use the spudger to disconnect the ribbon cable.


Step 4



- With the panel disconnected, lift the keyboard.


⚠ As with the panel, lift the keyboard **slowly**; there is a ribbon cable attached to the bottom.

Step 5

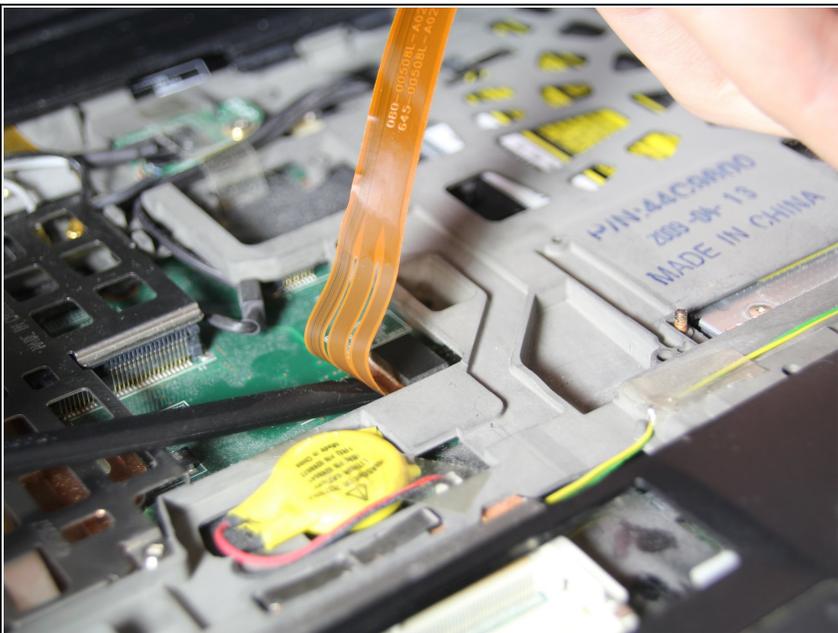

- Disconnect the ribbon cable with the spudger.

Step 6

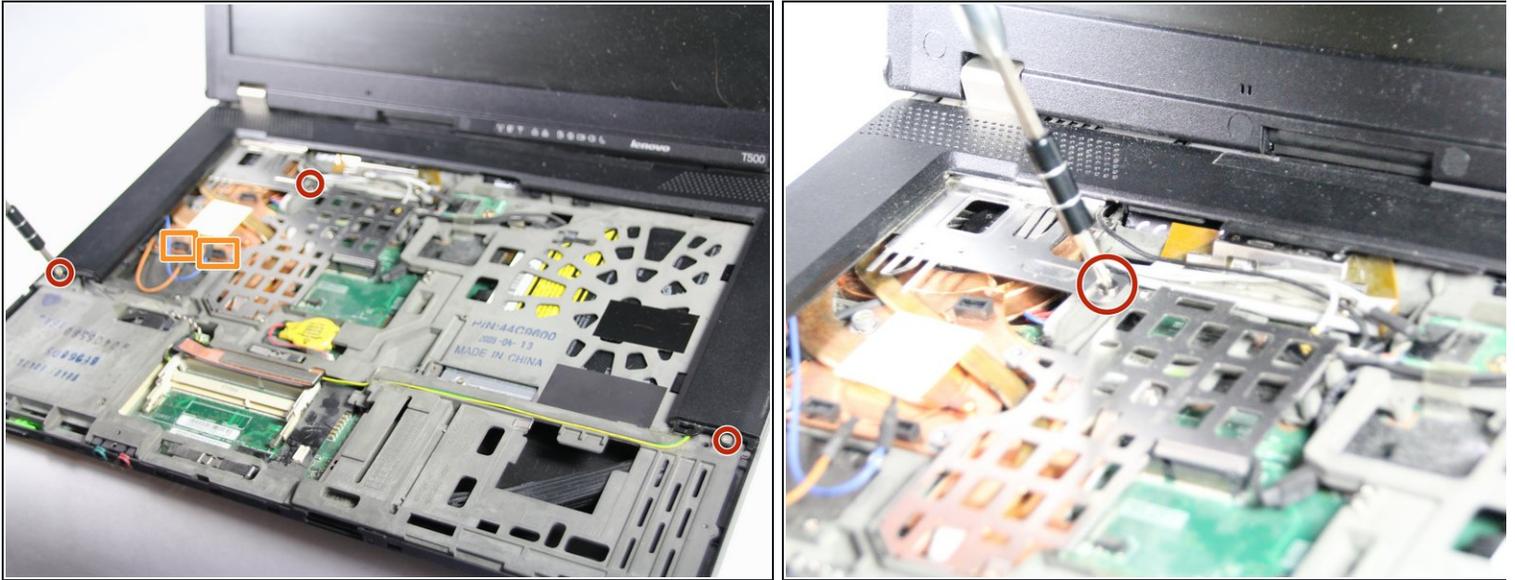


- Remove the keyboard and the panel.
- Using the Phillips #0 Screwdriver, remove the three 3 mm screws that are at the bottom sides and near the top-left of the speaker cover.
- Disconnect the orange and blue cables next to the left side of the speaker cover.

Step 7



- Remove the speaker cover.

Step 8

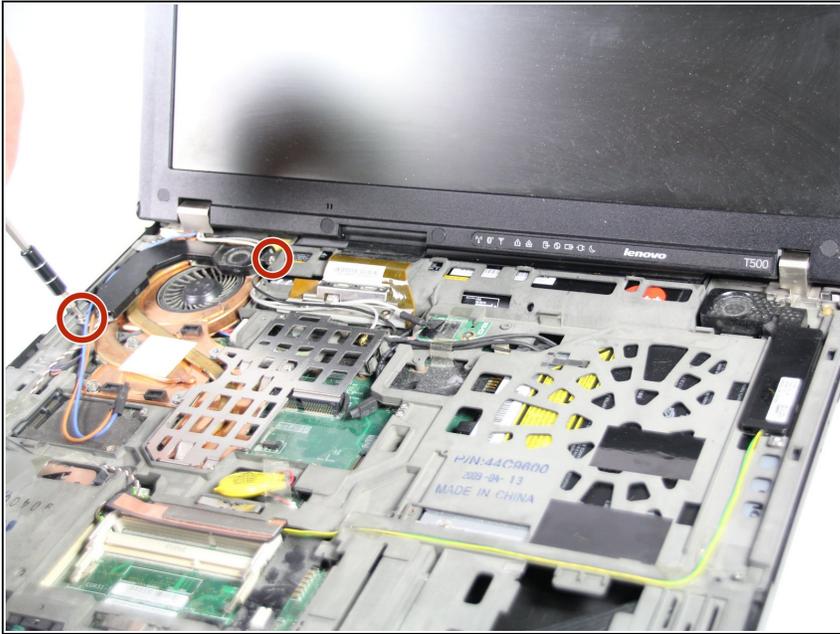

- Remove the two 3mm screws on the left speaker with the Phillips #0 Screwdriver.

Step 9




- Detach the blue and orange cables from the left speaker's clamps.

Step 10



- Using the Phillips #0 Screwdriver, lift the metal fastener up and remove the black and white wires.

Step 11

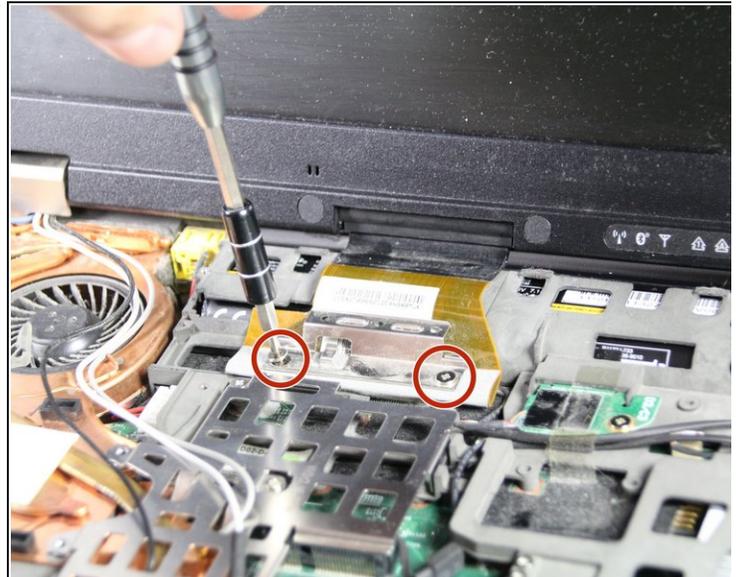

- Remove the two 3mm screws next to the lid hinges, as well as the two 3mm screws on the lid's ribbon cable.

Step 12



- Use the spudger to detach the screen's ribbon cable.

Step 13



- Remove the screen.

To reassemble your device, follow these instructions in reverse order.