



# Microsoft Surface 3 Battery Replacement

To replace the battery, you will first need to...

Written By: Johann Cayaban



# INTRODUCTION

To replace the battery, you will first need to remove the casing, undo the adhesive under the battery pack, and, finally, remove the battery to replace it.

## TOOLS:

[iOpener Kit](#) (1)  
[Microwave](#) (1)  
[Plastic Cards](#) (1)

## PARTS:


[Surface 3 Battery](#) (1)

## Step 1 — Casing



- Warm up an iOpener following the instructions found in the [iOpener guide](#).
- Place the warm iOpener on top of the edges of the screen. This heat will weaken the strength of the adhesive between the display and body.

## Step 2

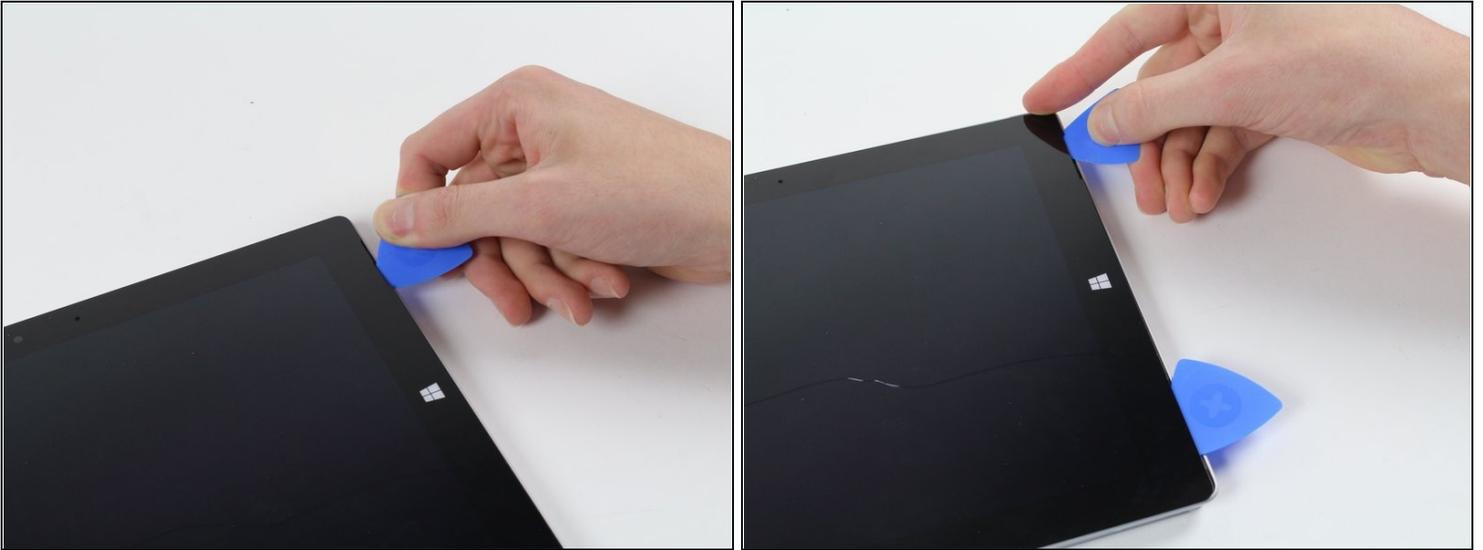

- Use iFixit opening picks to wedge under the edge of the screen at the speaker port.
  - ⓘ *This may take significant force. A fingernail might work better for the initial lift*
  - ⚠ *If you push straight down near the edge you will go through the speaker mesh and possibly end up damaging your speaker; try to push the pick in at a shallow angle.*

### Step 3



- Carefully try to work your way around the device using the picks, reapplications of the heated iOpener, and luck.
- ⓘ If you break the glass on one side you might want to try again starting from the other side so that you have a clean, unbroken, edge on that side.

⚠ While the glass on this display is not particularly sharp when broken, it is still broken glass and you should be careful with it.

### Step 4



- Flip the display over so that parts underneath it are easily accessible.
- ⚠ Do not pull out the display as it is still attached to the motherboard.
- ⓘ If you are replacing the display, or want it out of the way, continue with the [display replacement guide](#) steps.

## Step 5 — Battery




- Now that you've gotten the casing off of the Surface 3, you can start removing the battery pack.

## Step 6



- Slide the iFixit [plastic cards](#) under the compartments of the battery pack.
- Slide the card around to undo the adhesive under the battery pack

## Step 7

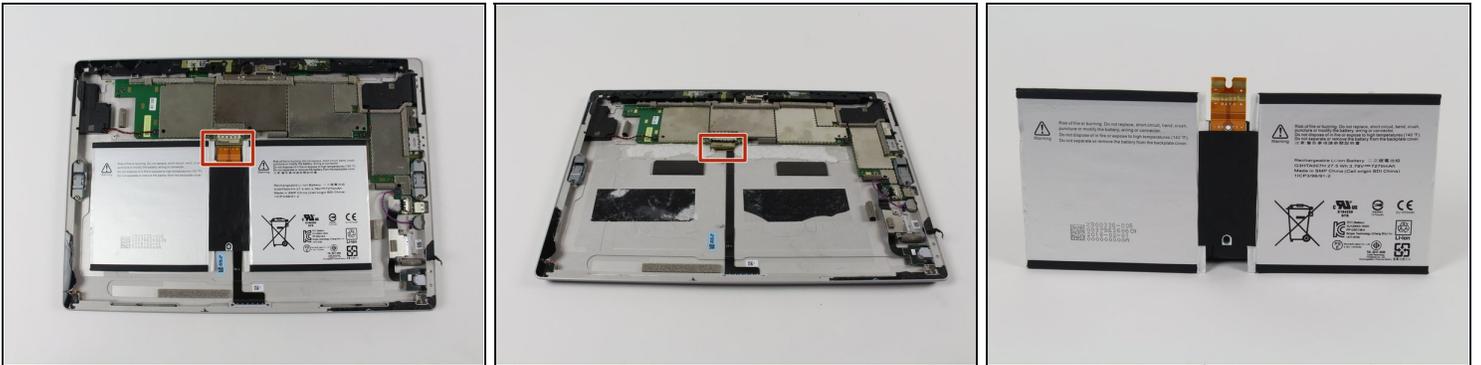

- Carefully slide the battery's flat power and data connector from its insert.
- You may now switch out the battery pack for a new one.

---

To reassemble your device, follow these instructions in reverse order.