



HP Pavilion zd8000 Keyboard Replacement

Written By: Allie Menard



INTRODUCTION

Removing your keyboard takes a few simple steps.



TOOLS:

- [Phillips #00 Screwdriver](#) (1)
 - [Spudger](#) (1)
-

Step 1 — Battery



- Slide the battery release latch towards you.

Step 2




- Pull up on the battery to remove it.

Step 3 — Keyboard



- Remove the two 8mm Philips screws marked “K” on the bottom of the laptop.

Step 4

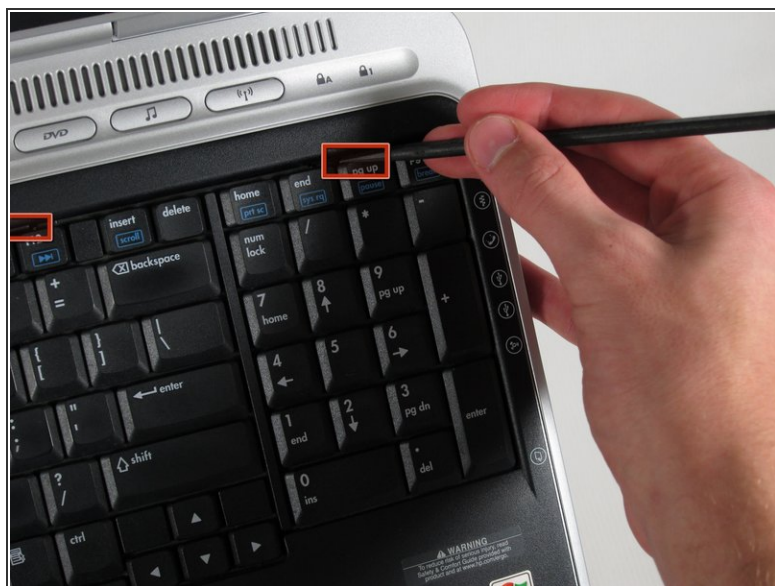

- Flip the laptop over and open the screen.
- Push up on the four latches located at the top of the keyboard with the spudger to release them.

Step 5



⚠ Lift the keyboard carefully because it is attached to the motherboard by a ribbon cable.

- Lift the top of the keyboard towards you. Then, while keeping the keyboard at an angle, lift it towards the display.

Step 6



- Rotate the keyboard so that the bottom is visible.
- With the keyboard lifted, locate the blue-striped tab on the underside of the black ribbon cable.
- Pull the tab towards you to release the keyboard from the laptop.

To reassemble your device, follow these instructions in reverse order.