



Palm Zire 71 Battery Replacement

Written By: Jinxian Jiang



INTRODUCTION

This guide is to show you how to replace the battery on Palm Zire 71.



TOOLS:

- [Phillips #00 Screwdriver](#) (1)
- [iFixit Opening Tools](#) (1)
- [T5 Torx Screwdriver](#) (1)



PARTS:

- [New battery](#) (1)

Step 1 — Preparation



- Flip the phone so it's facing screen-side down.
- Slide the back cover upward to open.

Step 2 — Top Screws (2) Removal



- Use a Torx T5 screwdriver to remove the top two screws.

Step 3 — Bottom Screws (3) Removal



- Remove the back sticker.
- Remove the three bottom Phillips #00 screws.

Step 4 — Front Panel Removal



- Flip the phone over so it's facing screen-side up.
- Slide the screen upward by a few millimeters without detaching the screen.
- Use the plastic opening tool to pry off the front panel.

Step 5 — Bracket and Speaker Removal



- Remove the bottom two Phillips #00 screws.
- Remove the bracket.
- Use the plastic opening tool to pry off the speaker.

Step 6 — Back Cover




- Slide the back cover off.

Step 7 — Battery






- Remove the Philips #00 screw
- Remove the sliver metal piece

Step 8

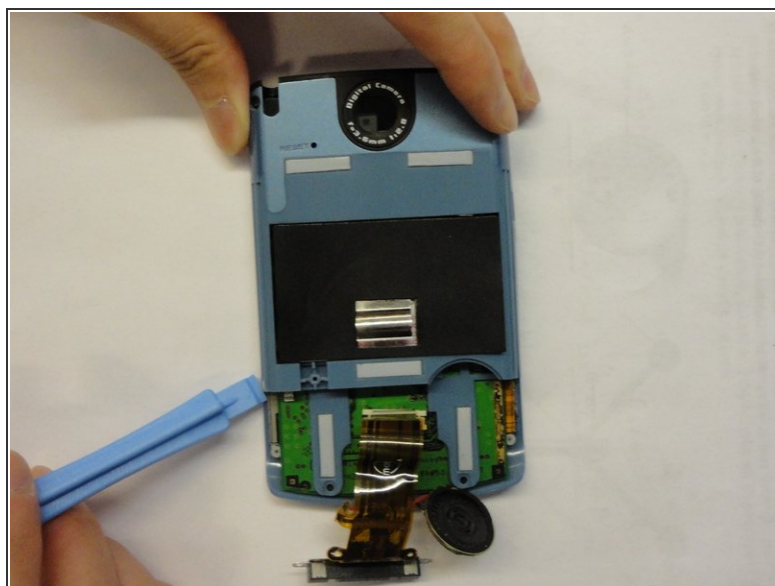

- Remove the Philips screws #00
- Remove the rear blue panel by prying both sides using the plastic opening tool

Step 9

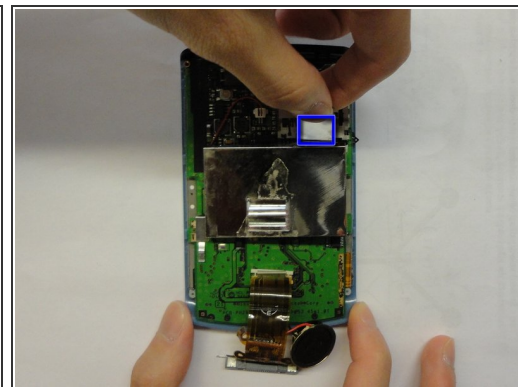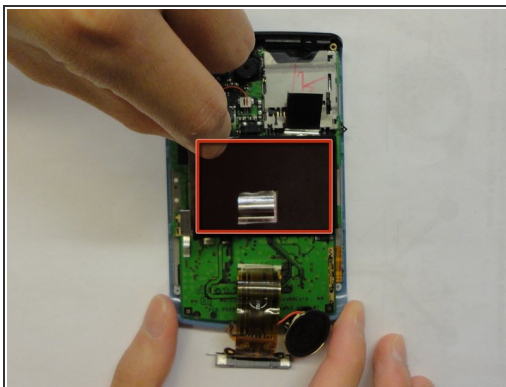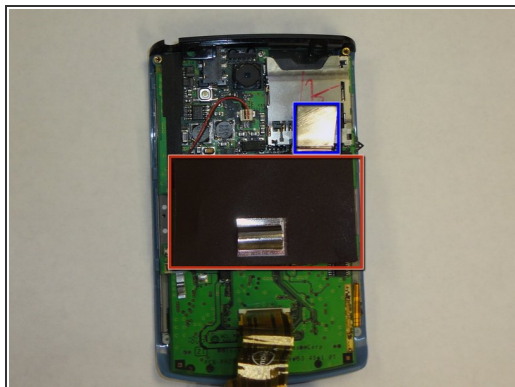

- Remove the black plastic sticker
- Pull the tap up to remove the metal cap

Step 10



- Remove the cable by pinching the sides and pulling
- Pry off the battery with the plastic opening tool
- Insert the new battery

To reassemble your device, follow these instructions in reverse order.