



Asus 1015E-DS03 Front Screen Trim Replacement

This guide will show you how to replace the trim around the screen.

Written By: Becca Day



INTRODUCTION

This guide will show the user how to remove the front secret trim. The only tool needed is a spudger which will be used to push up the tabs connecting the screen to the base of the laptop.

TOOLS:


- [Fingers](#) (1)
 - [Spudger](#) (1)
-

Step 1 — Battery



- Hold the laptop using both hands with the battery facing upwards.

Step 2

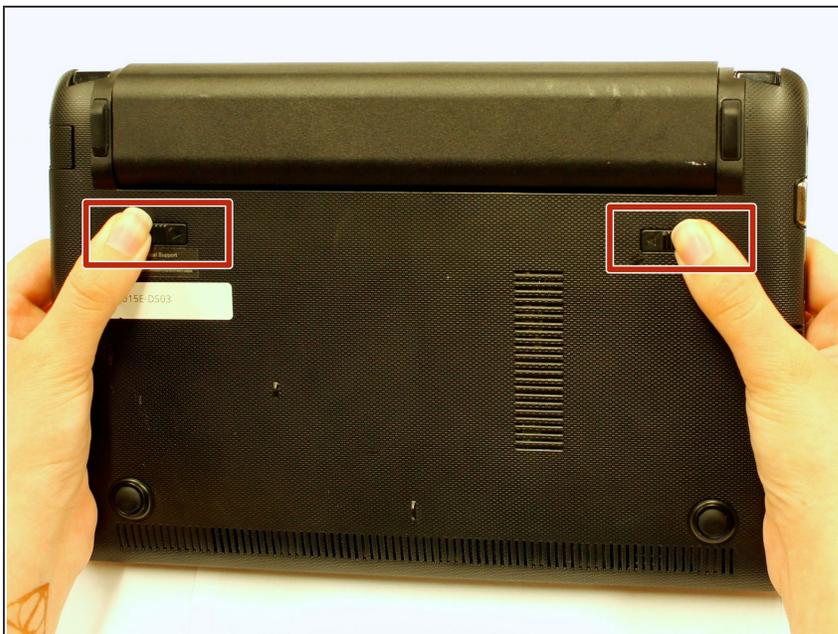

- Push the two tabs located below the battery in towards each other using your thumbs.

Step 3



- Push the battery upwards and out of the laptop as shown.

Step 4



- Continue to push the battery upwards until it is completely separated from the laptop as shown.

Step 5 — Front Screen Case



- Push up on the back of the tabs that cover the hinges connecting the screen to the base of the laptop.
- While pushing up on the back of the tabs, insert the spudger into the opening created from pushing on the tabs until the tab detaches.

Step 6



- Once the case has been separated from the laptop, pull the case off completely, using the plastic opening tool or your fingers.

i You will hear popping noises which are to be expected.

Step 7



- When the screen case has been successfully removed, the laptop should resemble the photo shown here.

To reassemble your device, follow these instructions in reverse order.