




Lenovo Flex 3-1120 Hard Drive Replacement

Use this guide if your current hard drive is...

Written By: Geoff Bentz

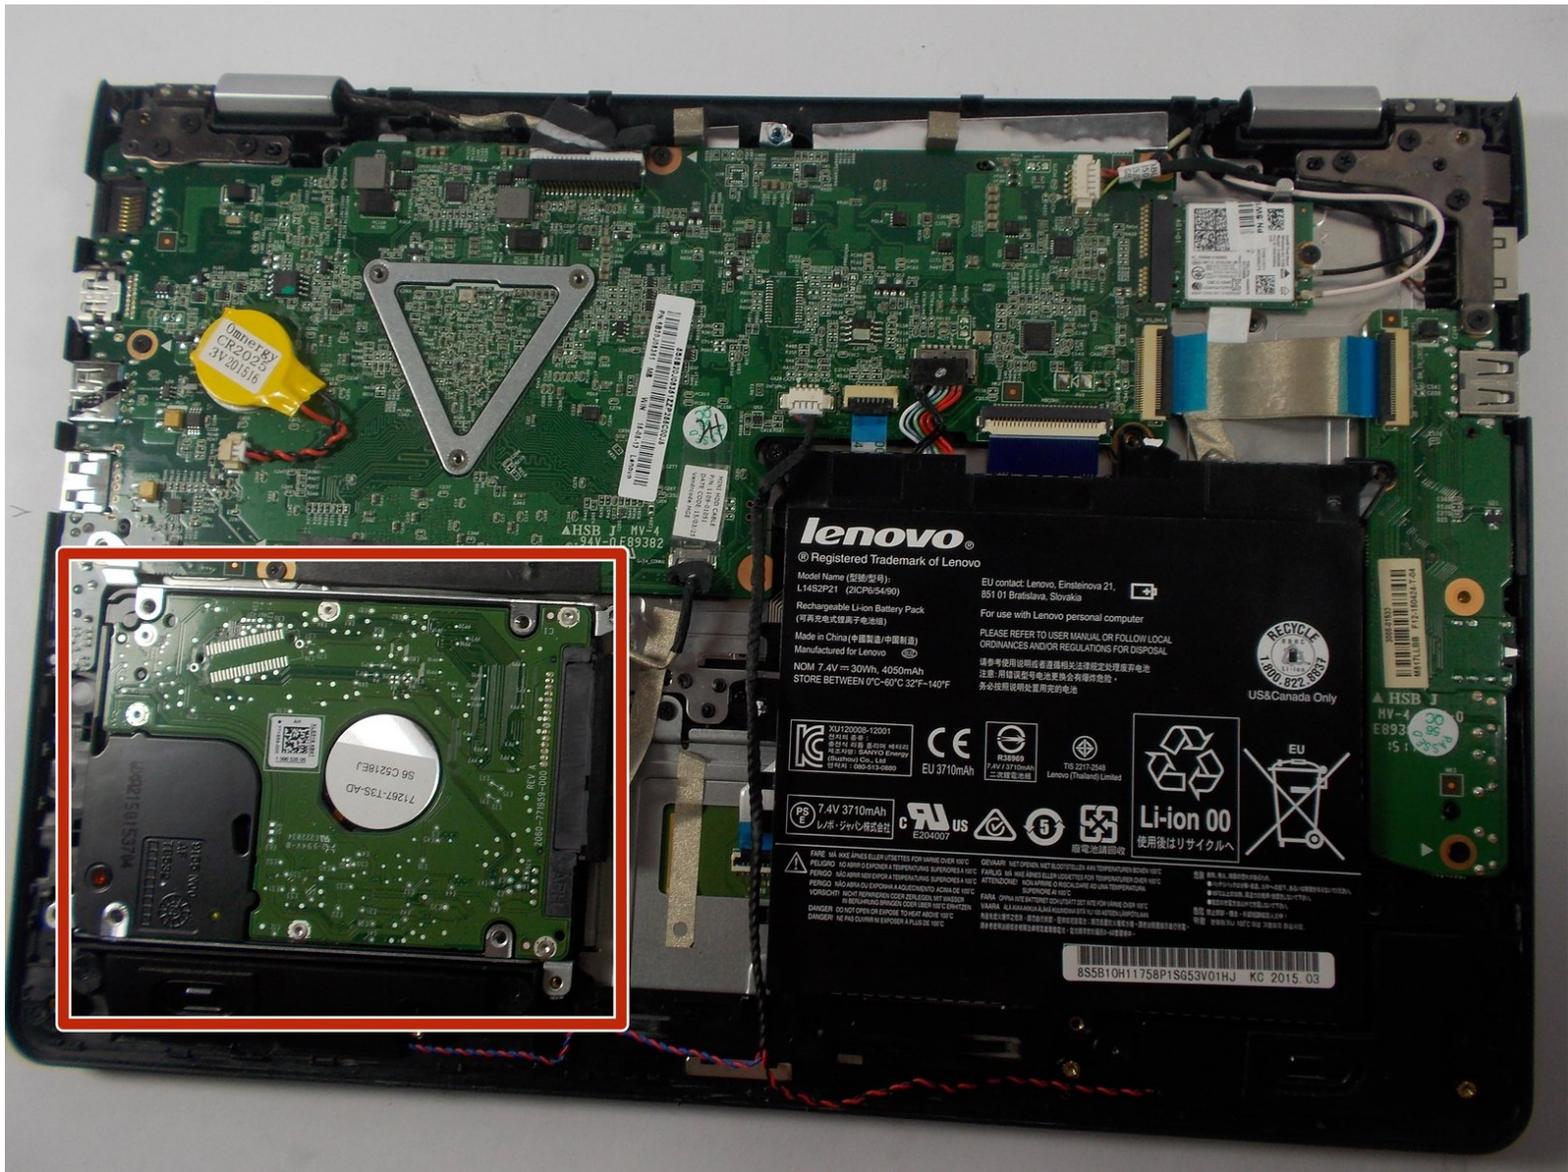

INTRODUCTION

Use this guide if your current hard drive is damaged and needs to be replaced, or if you are simply looking to upgrade your storage.

TOOLS:

- [Phillips #0 Screwdriver](#) (1)
- [iFixit Opening Tool](#) (1)

PARTS:

- [Crucial MX500 1 TB SSD](#) (1)
- [Crucial MX500 250 GB SSD](#) (1)
- [Crucial MX500 500 GB SSD](#) (1)
- [Crucial MX500 2 TB SSD](#) (1)

Step 1 — Bottom Panel




- Lay the computer down with the bottom panel facing up.

Step 2



- Locate the ten 6mm Phillips screws along the edges and in the center of the back panel.
- Remove all ten 6mm Phillips screws with a size 0 Phillips screwdriver.

Step 3

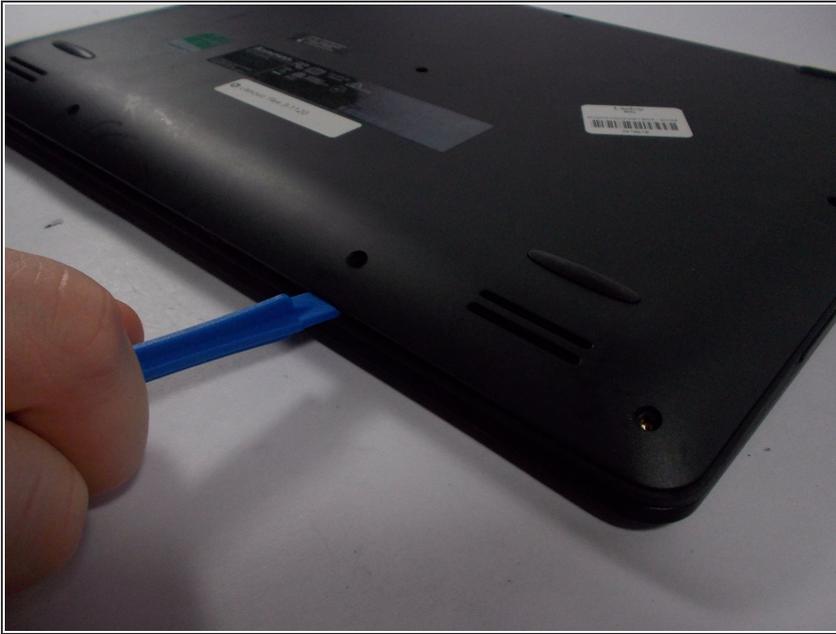

- Wedge the plastic opening tool into the small space under the back panel.
 - Use the plastic opening tool as a lever to separate the bottom panel from the computer.
 - Slide the tool along the edges of the computer until the bottom panel is completely separated.
- i** You may start prying the bottom panel on any edge.

Step 4




- Lift the bottom panel off of the computer.

Step 5 — Hard Drive




- Locate the hard drive in the bottom left of your computer.

Step 6

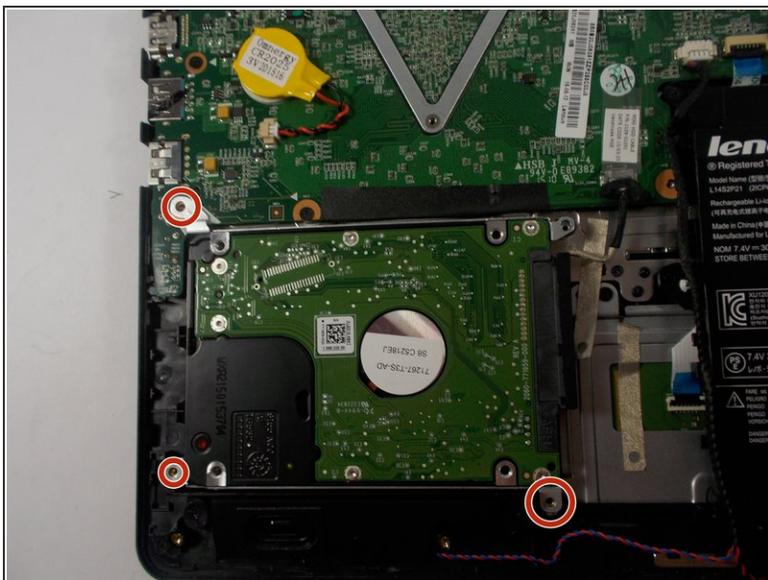


- Locate the three 3.5mm Phillips screws on the corners of the hard drive.
- Remove the three screws with a size 0 Phillips screwdriver.

Step 7

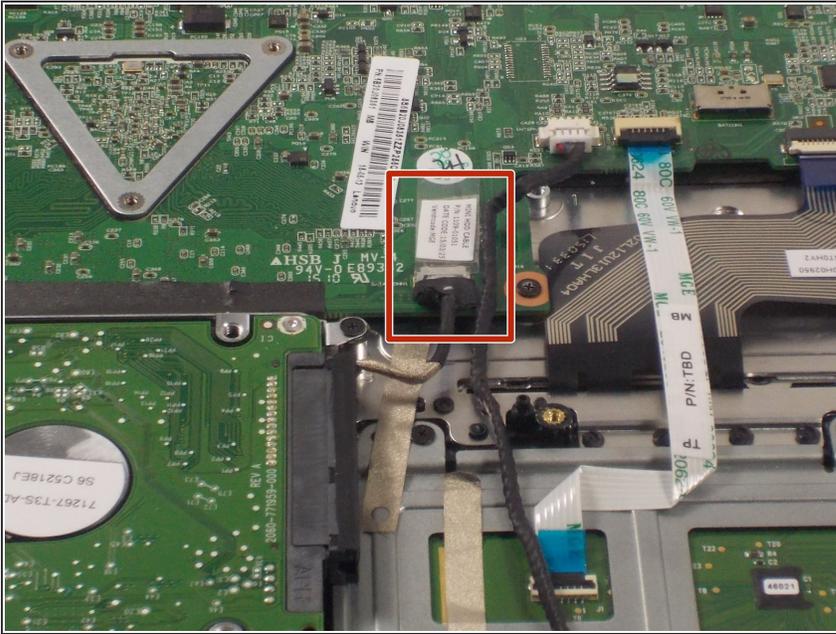


- Follow the wire out from the right side of the hard drive to locate where the hard drive connects to the motherboard.

Step 8

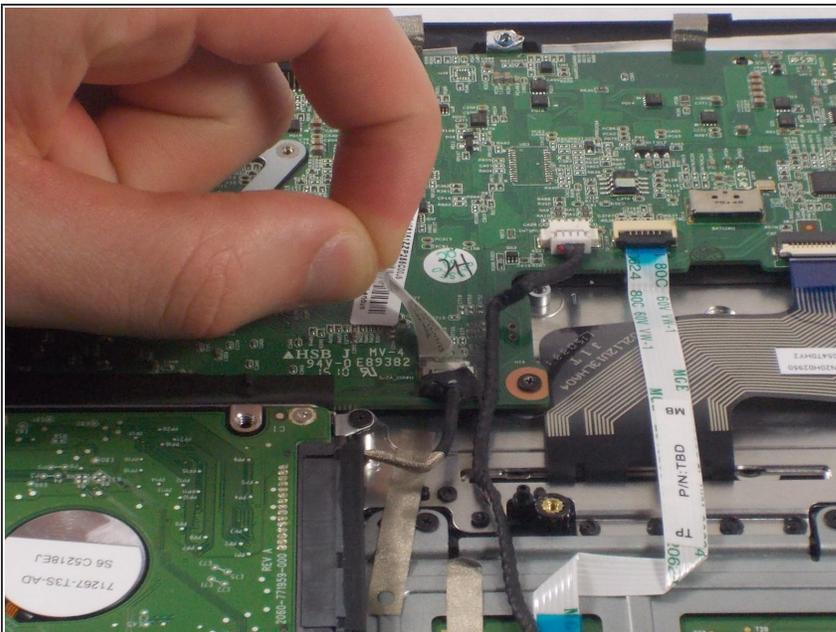

- Lift off the strip of tape securing the wire down to the computer.

Step 9

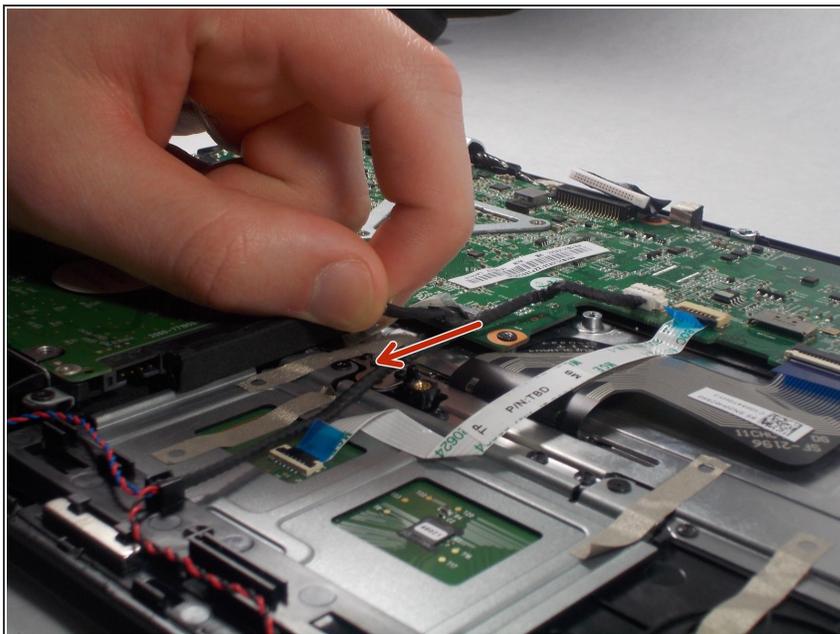

- Pull the connector out of its port on the motherboard.

Step 10



- Lift the hard drive out from the computer.

To reassemble your device, follow these instructions in reverse order.