
INTRODUCTION

Use this guide to replace the midframe on your LG G3 Vigor.

TOOLS:


- [Phillips #00 Screwdriver](#) (1)
 - [iFixit Opening Tools](#) (1)
-

Step 1 — Midframe



- Remove the twelve Phillips #00 screws securing the midframe to the rest of the phone.

Step 2

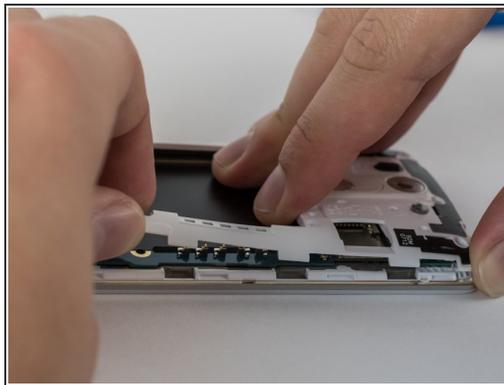

- Work a plastic opening tool around the perimeter of the phone to separate the midframe from the rest of the phone.

To reassemble your device, follow these instructions in reverse order.