



# Dell Inspiron 9300 Prerequisite Only Replacement

Prerequisite Only

Written By: Steven Faulkner



---

# INTRODUCTION


Prerequisite Only



## TOOLS:

- [Heavy-Duty Spudger](#) (1)
  - [iFixit Opening Tools](#) (1)
  - [Phillips #0 Screwdriver](#) (1)
-

## Step 1 — Prerequisite Only

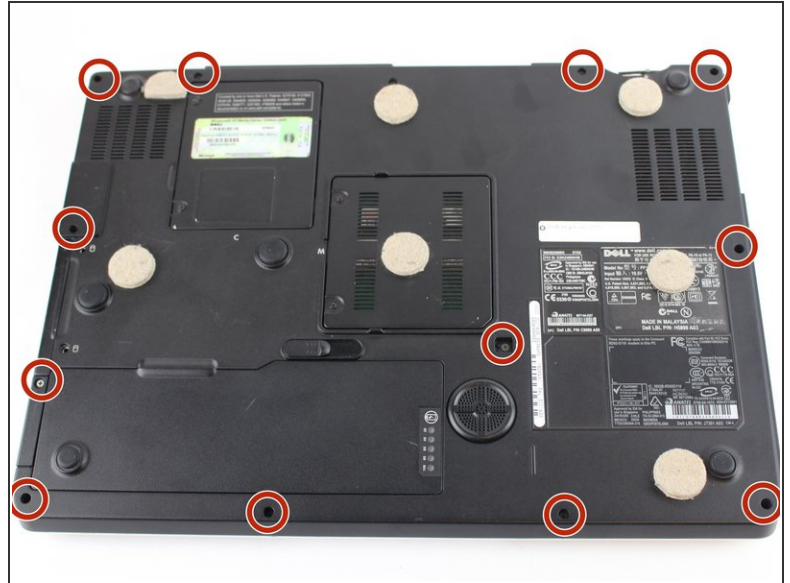

- Remove the battery prior to working on any internal components.
  - Remove the twelve 6mm Phillips screws from the bottom of the case.
- ⚠ Remove the battery before working on internal components to ensure a safe working environment.

## Step 2



- Gently pry away the silver bezel above the keyboard and below the display using a spudger.
- ⓘ Start on the right hand side, where there is a notch in the bezel for easiest removal.


## Step 3



- Remove the two 5mm Phillips screws retaining the keyboard.
- Pull the keyboard up and toward the monitor to reveal the ribbon cable beneath.
- Firmly grasp the blue tape attached to the keyboard ribbon cable connector and pull upward away from the motherboard.





## Step 4

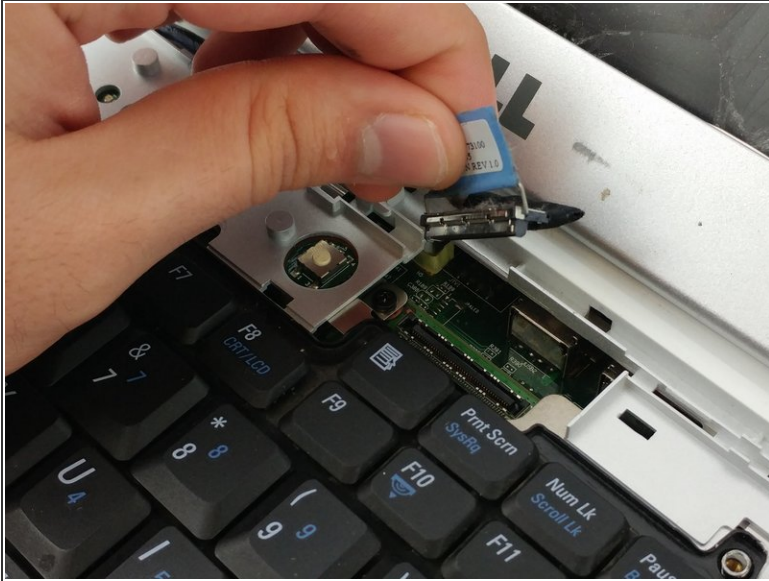

- Firmly grasp the blue tape attached to the LCD display ribbon cable connector and pull upward away from the motherboard.
  - Remove the two 5mm Phillips screws holding the display hinge on both sides of the laptop.
- ⚠ Support the display as you loosen the hinges, to avoid the screen falling and breaking.

## Step 5

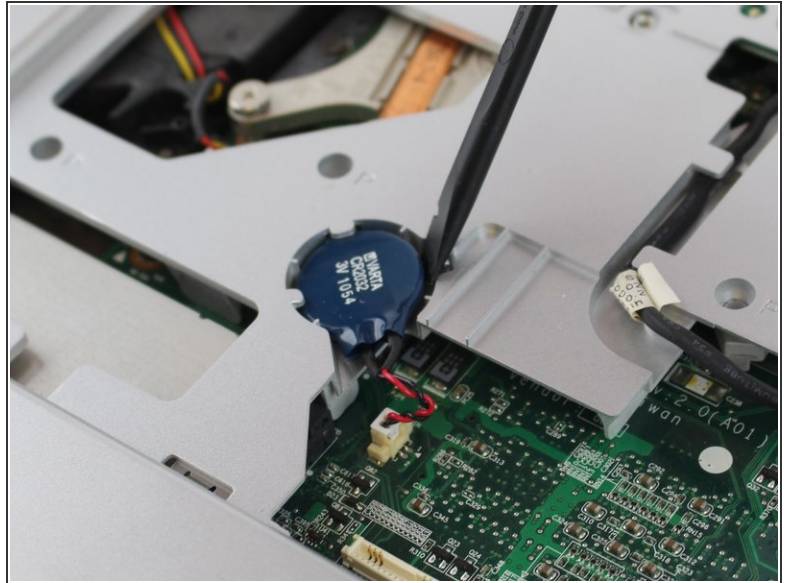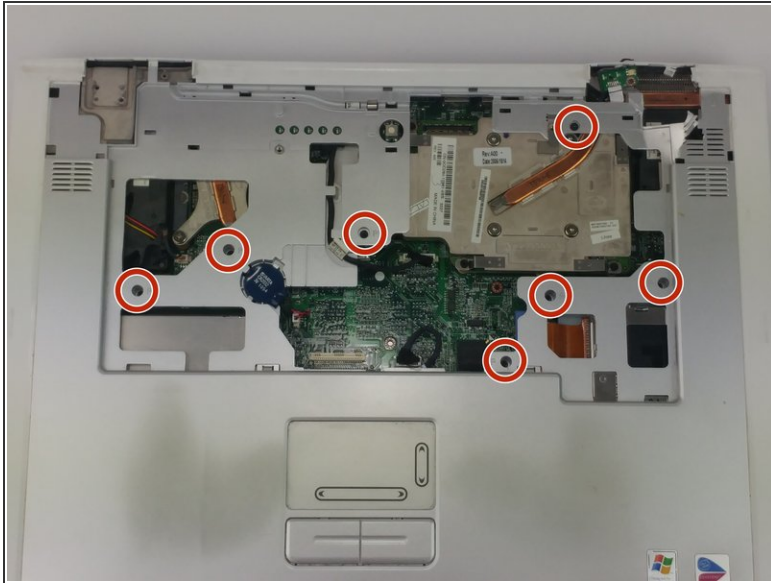

- Remove the seven 6mm Phillips screws holding the trackpad/palm rest to the motherboard.
- Gently pry the CMOS battery out of its retaining clip using a spudger.



## Step 6



- Remove the low profile connector for the keyboard status lights located next to the video card heat sink using a spudger.
- Remove the trackpad ribbon cable from the motherboard using a spudger.

## Step 7



- Pull up and away on the track pad to expose the internal components below.

To reassemble your device, follow these instructions in reverse order.