




Asus Eee PC 1005HA Keyboard Replacement

Use this guide to replace the keyboard in the...

Written By: Chris Beichler

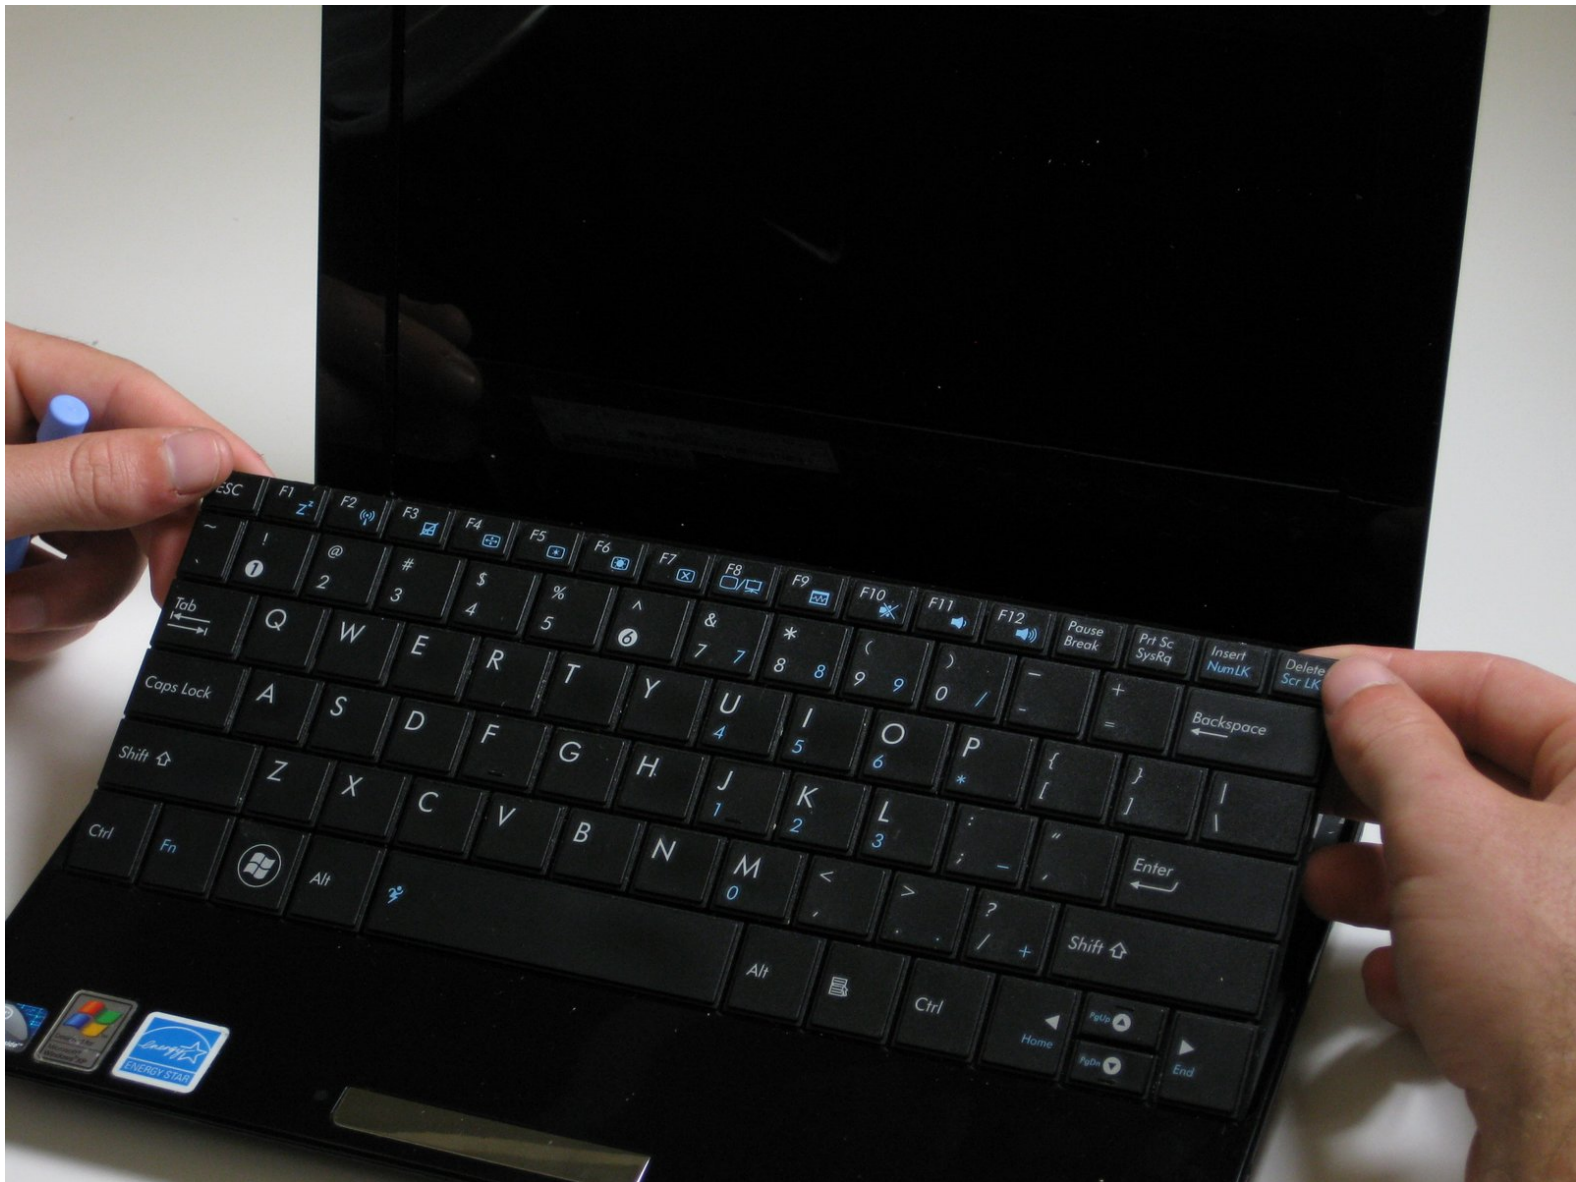

INTRODUCTION

Use this guide to replace the keyboard in the Asus Eee PC 1005HA.



TOOLS:

- [iFixit Opening Tool](#) (1)
 - [Spudger](#) (1)
-

Step 1 — Battery




- Lay the laptop upside down.
- Locate the two battery lock tabs.

Step 2



- Slide the tabs outward to unlock the battery.
 - ⓘ The left tab will remain unlocked, while the right tab must be held.
- Holding the right tab open, slide the battery out of the laptop.


Step 3 — Keyboard

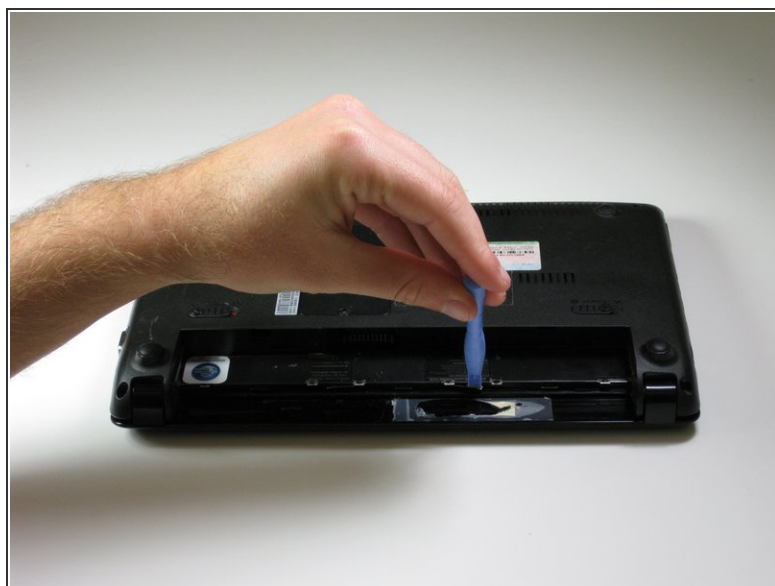

- Use a plastic opening tool to pull up the four metal latches in the battery cavity that is located on the bottom of the laptop.

⚠ Do not apply too much pressure. The latches can not be removed and will bend if forced.


Step 4

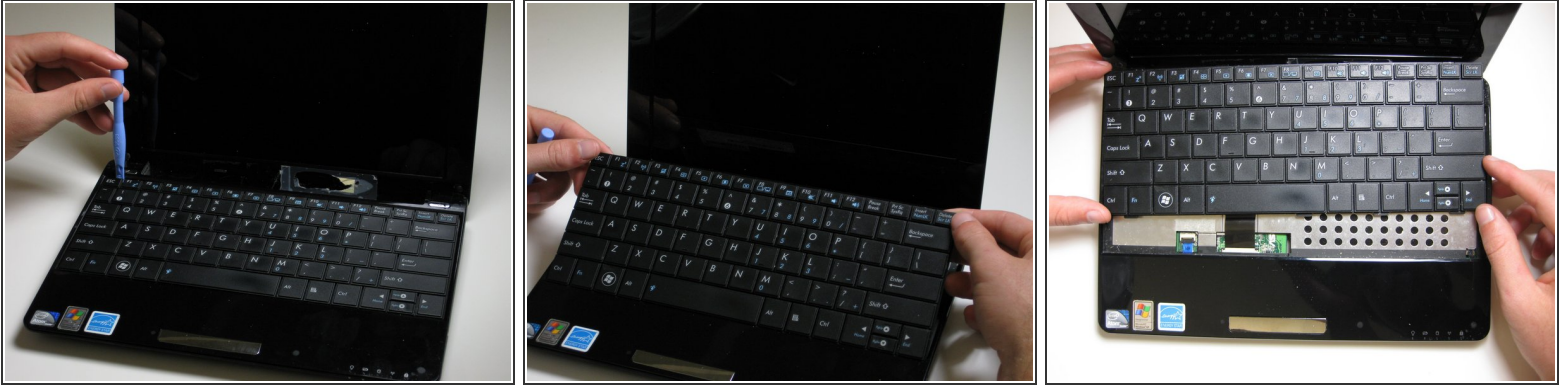

- Flip the laptop over, and open the display.
- Use a plastic opening tool to lift the edge of the keyboard that is nearest to the screen.
- Gently lift the keyboard and slide it toward the screen.

⚠ Do not remove the keyboard completely. This can damage the ribbon cable connecting the underside of the keyboard to the laptop.

Step 5

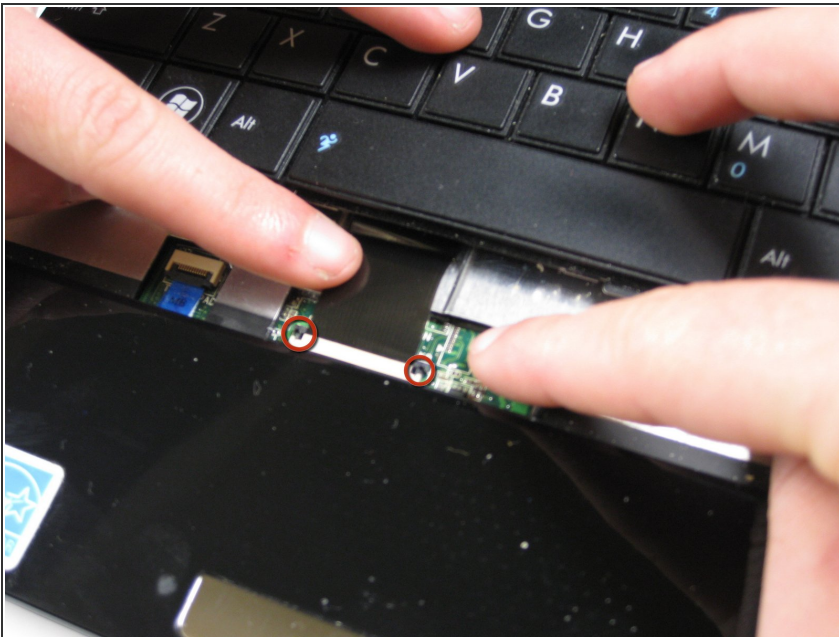

- Use a spudger tool to release the tabs on the ribbon cable ZIF connector that is attached to the underside of the keyboard.
- ⓘ Depending on the model, the tabs on this ZIF connector will either flip up toward the display or push out toward the display.
- Once the ZIF connector tabs have been released, remove the keyboard.

To reassemble your device, follow these instructions in reverse order.