




# Asus EeeBook X205TA LED Screen Panel Chip Replacement

This will show the user how to replace the LED Screen Panel Chip on the Asus EeBook X205TA.

Written By: Rachael

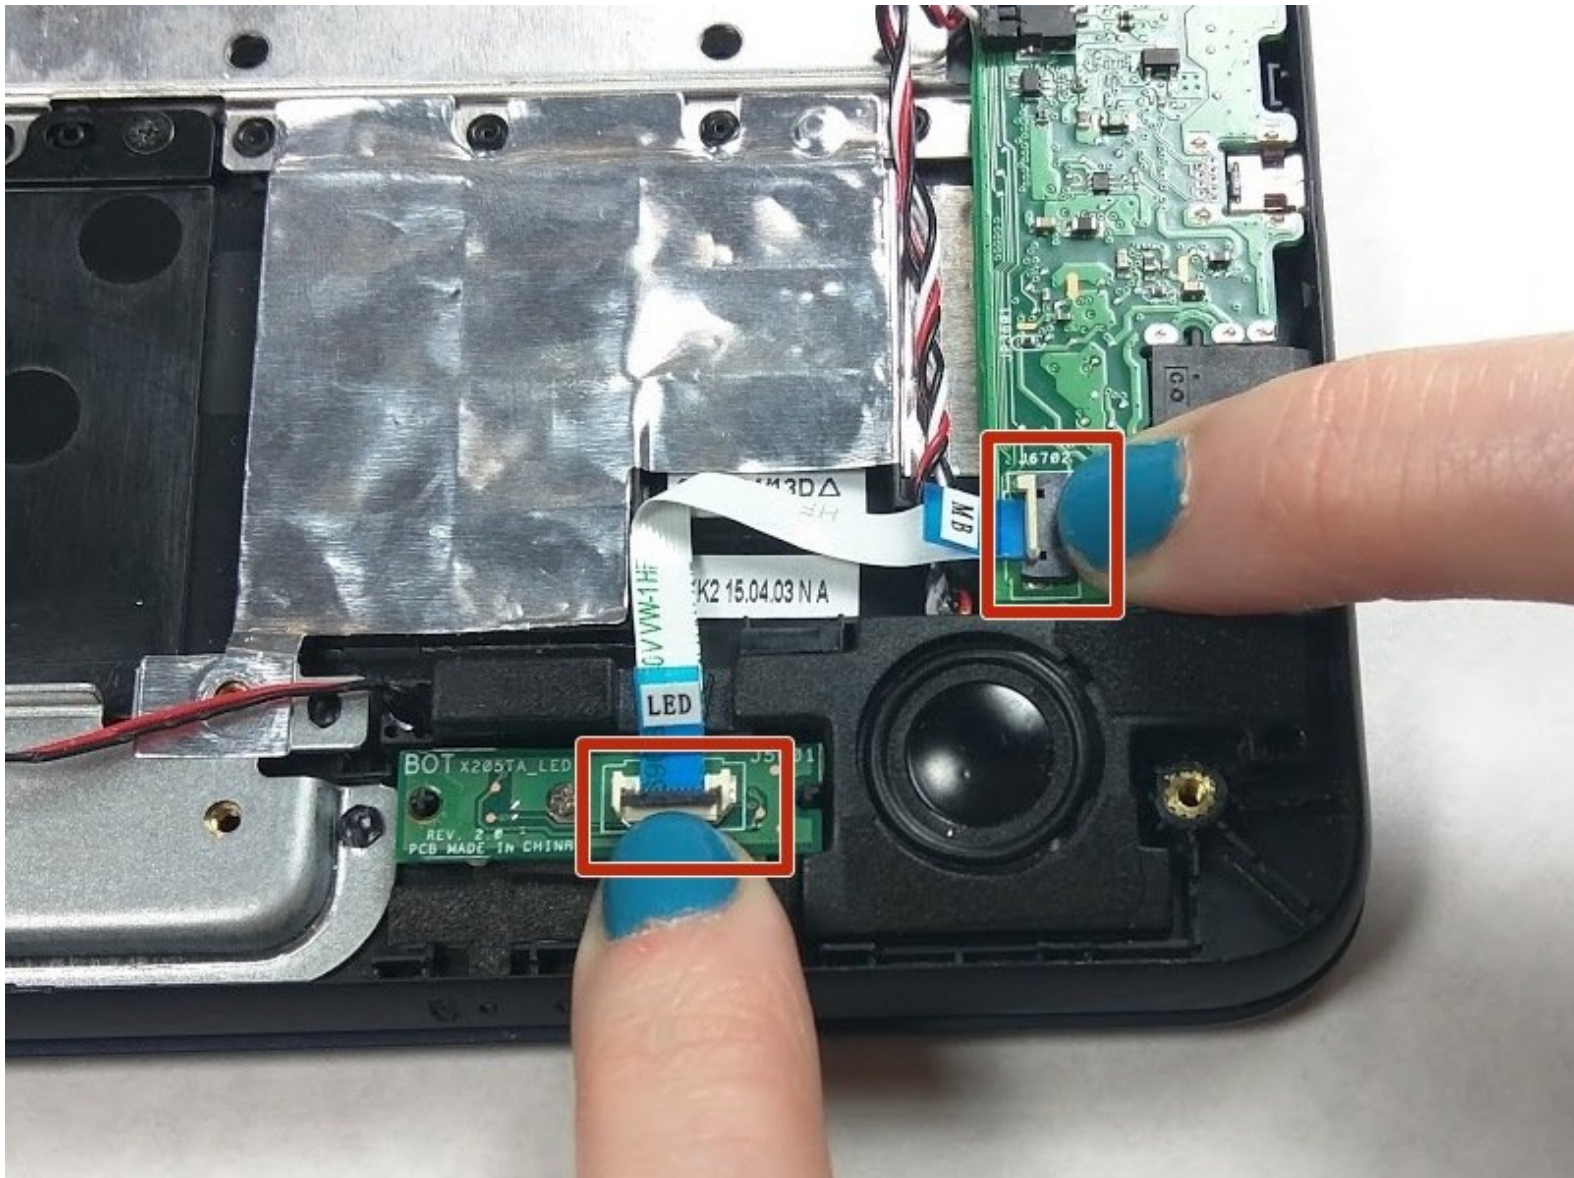

---

## INTRODUCTION

This guide will help you replace your Asus EeeBook X205TA LED panel chip if it is damaged. If disposing of the LED chip, please follow the laws and regulations for proper disposal.


---



### TOOLS:

- [iFixit Opening Tools](#) (1)
  - [Phillips #2 Screwdriver](#) (1)
  - [JIS Driver Set](#) (1)
-

## Step 1 — Battery

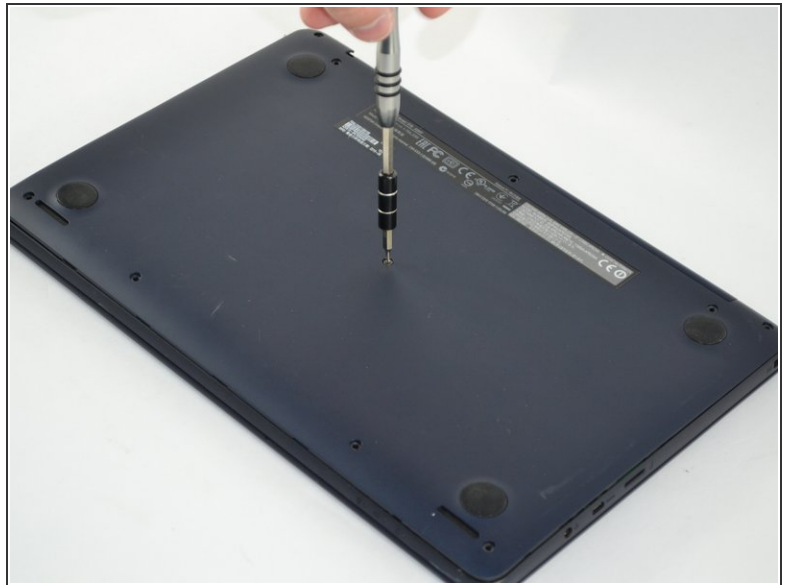

- Unscrew all ten 2mm screws located on the bottom of the laptop using a Phillips #2 screwdriver.

## Step 2



- Insert the plastic opening tool in the crevice between the back of the laptop and the rest of the case.
- Carefully pry open the case from several points.
- ⓘ Slowly remove the back of the laptop, revealing the parts inside.



## Step 3



- Unscrew all six 2mm screws using Philips #2 screws along the edges of the L-Shaped battery.

**i** Any tape or cords that run along the battery should be carefully pushed to the side.

## Step 4




- Disconnect the battery from the motherboard by pulling the No-Fuss Ribbon cables out of the connector.

## Step 5



- Carefully lift the battery out of the laptop.


## Step 6 — LED Screen Panel Chip

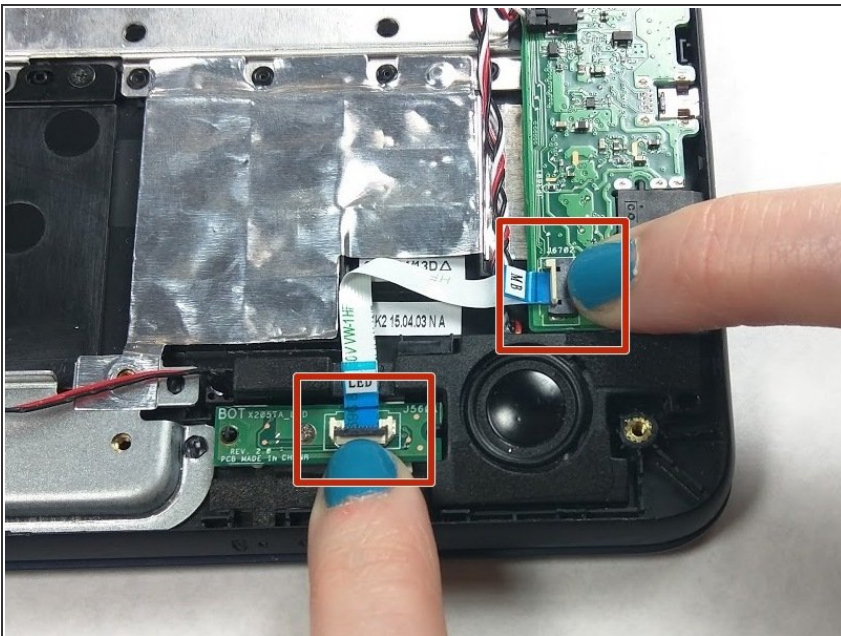

- Locate and lift the tabs from the LED/motherboard ribbon cable.
- Remove the cable.




## Step 7

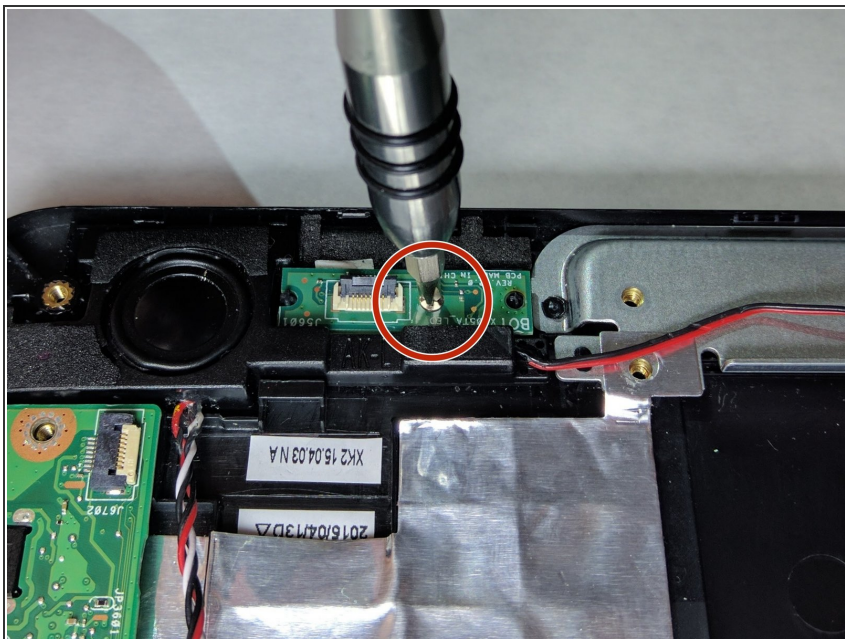

- Unscrew the 1 JIS 2mm screw with the J0 bit.

## Step 8

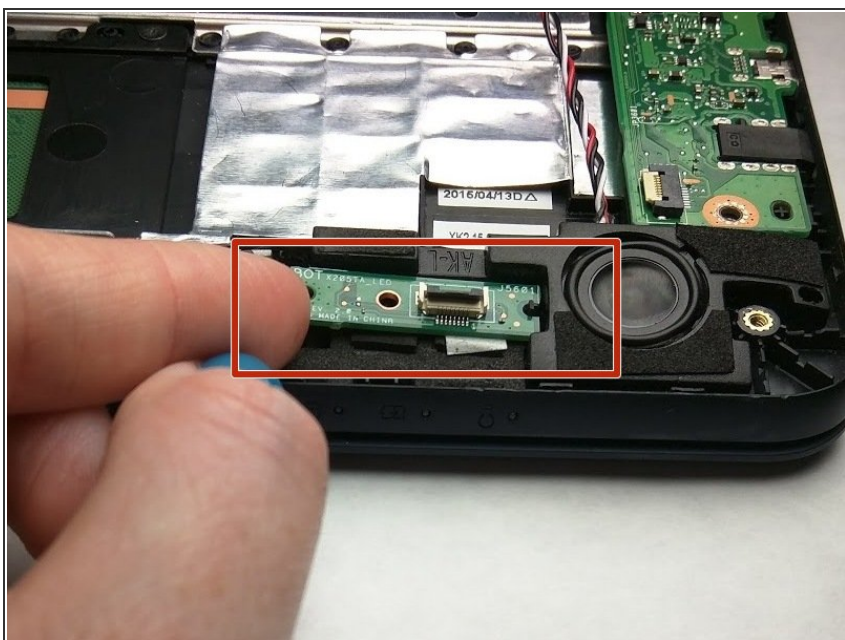

- Remove the chip.

To reassemble your device, follow these instructions in reverse order.