



Samsung Galaxy J3 Headphone Jack Replacement

Replacing the headphone jack to bring back sound when using a pair of headphones.

Written By: Makayla Williams



INTRODUCTION

Sometimes the headphone jack can get extremely dirty or get something lodged in it. This guide will show you how to remove and replace the headphone jack.

TOOLS:


- [Metal Spudger](#) (1)
 - [Phillips #000 Screwdriver](#) (1)
-

Step 1 — Headphone Jack



- Separate the back casing from the phone by carefully using your fingers to pry it apart.

Step 2

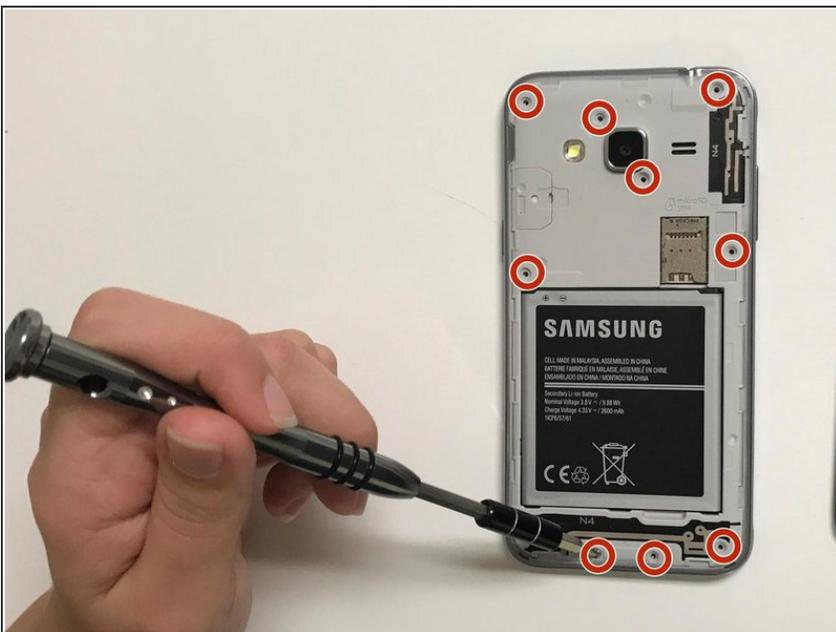



- Remove all 11 screws by using the J000 phillips

Step 3



- Remove the battery by gripping on and pulling up.


Step 4

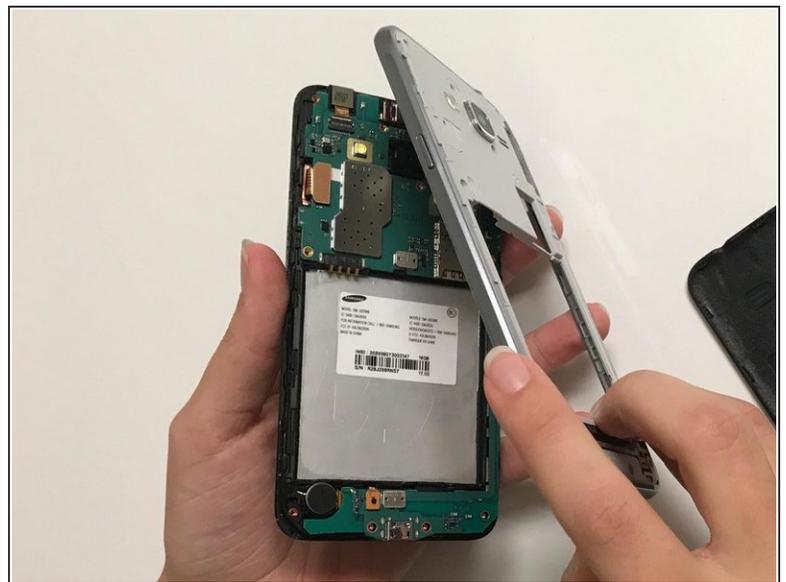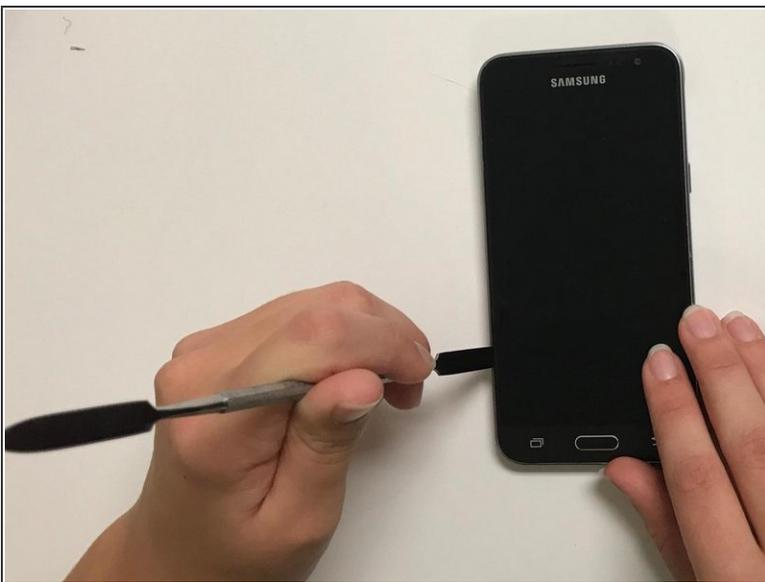

- Use the flat side of the metal spudger to remove the middle frame bezel.

 Do not use a wrenching motion while performing this step. The screen may crack.

Step 5

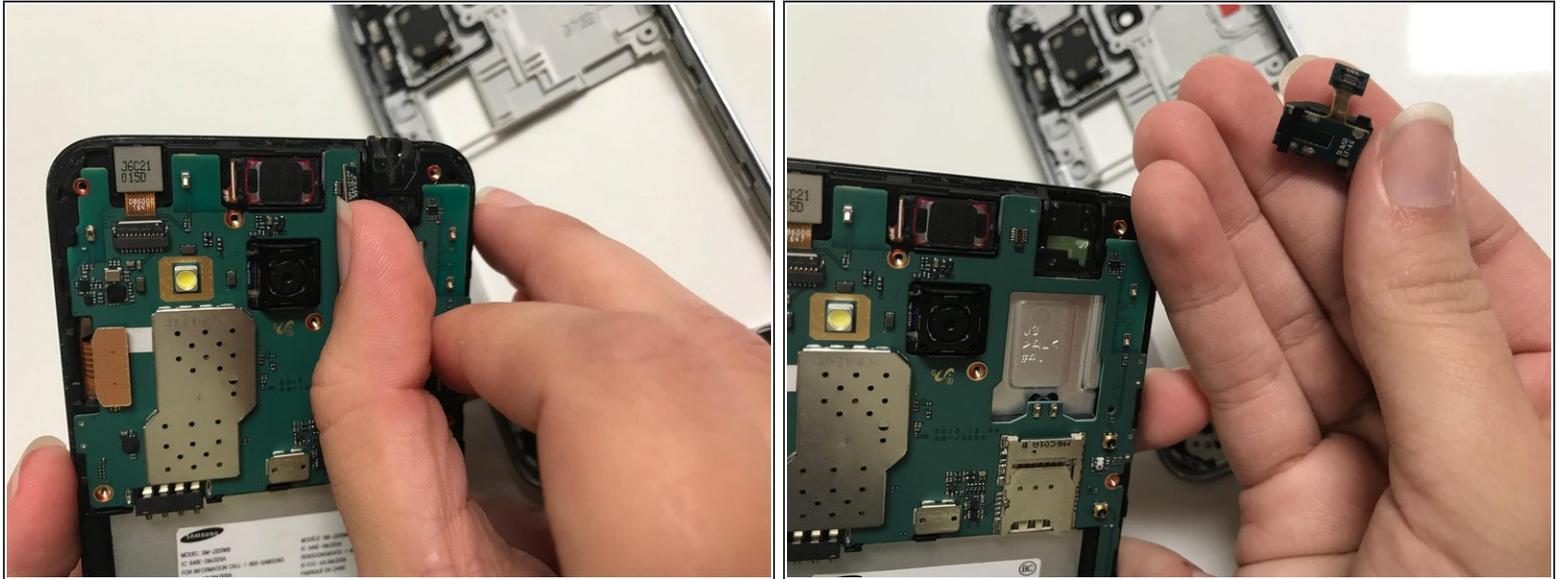

- Detach the headphone jack from the motherboard plug-in.
- Replace the headphone jack.

To reassemble your device, follow these instructions in reverse.