



# Lenovo Yoga Tablet 2 830-F Motherboard Replacement

This guide will cover the replacement of the motherboard in the Lenovo Yoga 2 Tablet

Written By: Charles Rhode





## TOOLS:

- [Phillips #00 Screwdriver](#) (1)
- [Spudger](#) (1)
- [iFixit Opening Tools](#) (1)



## PARTS:


- [Lenovo Yoga 2 Tablet Motherboard](#) (1)

## Step 1 — Motherboard



- Remove the two 3mm screws on the back of the device with the Phillips Screwdriver #00 bit.
- Remove the 2mm screw on the back of the device with a Phillips #00 bit.
- Using the blue opening tools or spudger, gently remove the back cover to expose the interior of the tablet.


## Step 2

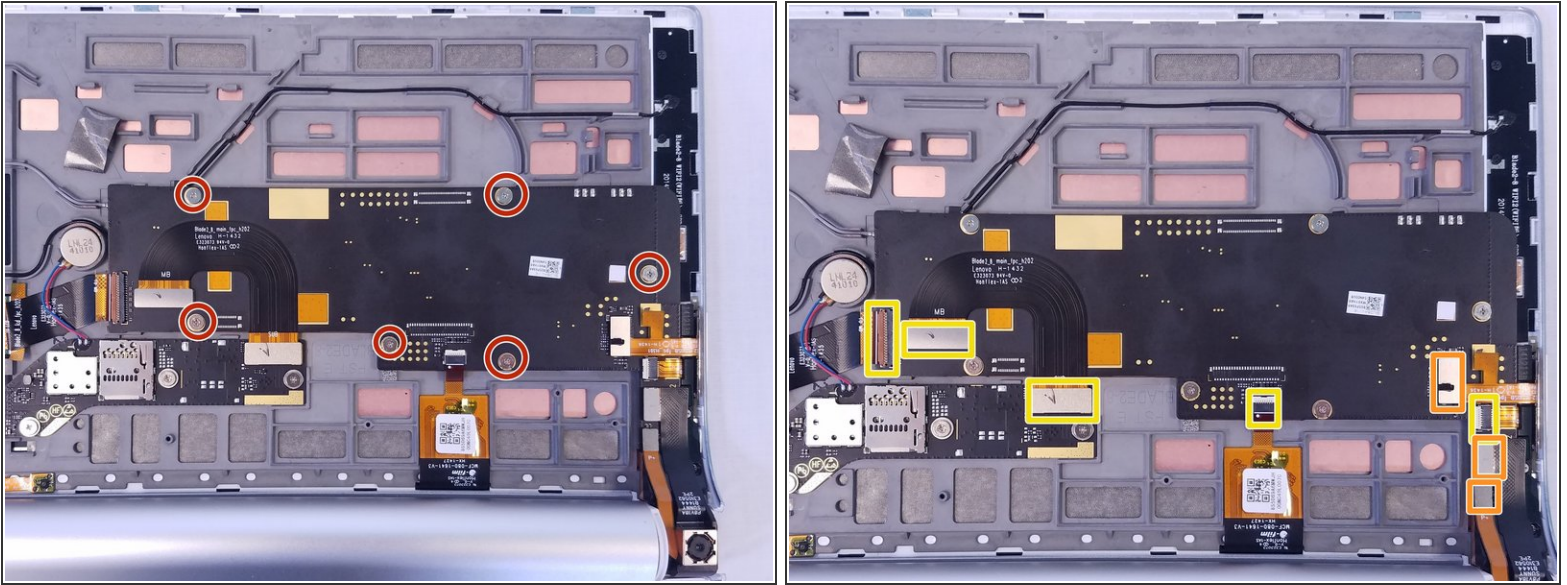

- Remove the six 3mm screws on the back of the motherboard with the Phillips Screwdriver #00 bit.
  - Remove the ribbon cables connecting the boards to the other electrical components
  - Remove ZIF connectors connecting the boards to the electrical components.
- ⚠ Some of the ribbon cables are secured with clips, simply pry up the clips before sliding them out of the pin connectors.



## Step 3

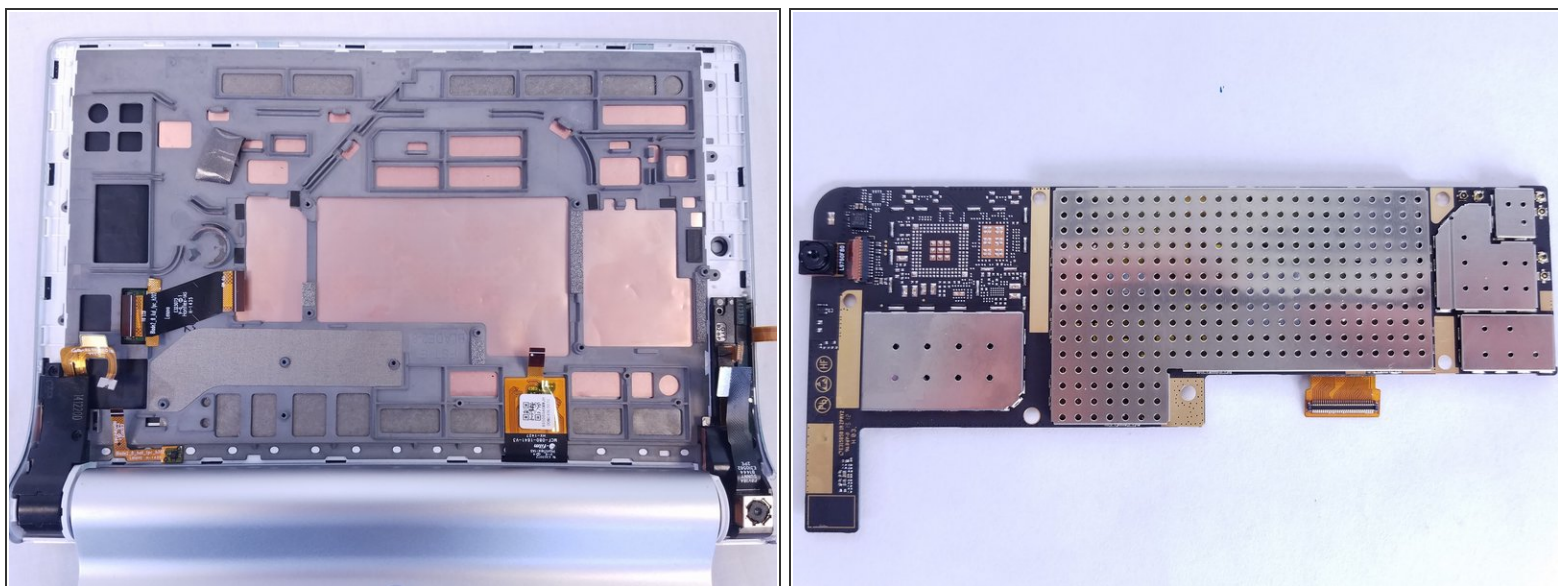

- Replace the motherboard with the new motherboard.

⚠ Be careful not to damage the ribbon cables when reassembling the device.

To reassemble your device, follow these instructions in reverse order.