




Panasonic SA-PM17 Tape Player Unit Replacement

This repair guide will show you how to replace...

Written By: NathanB

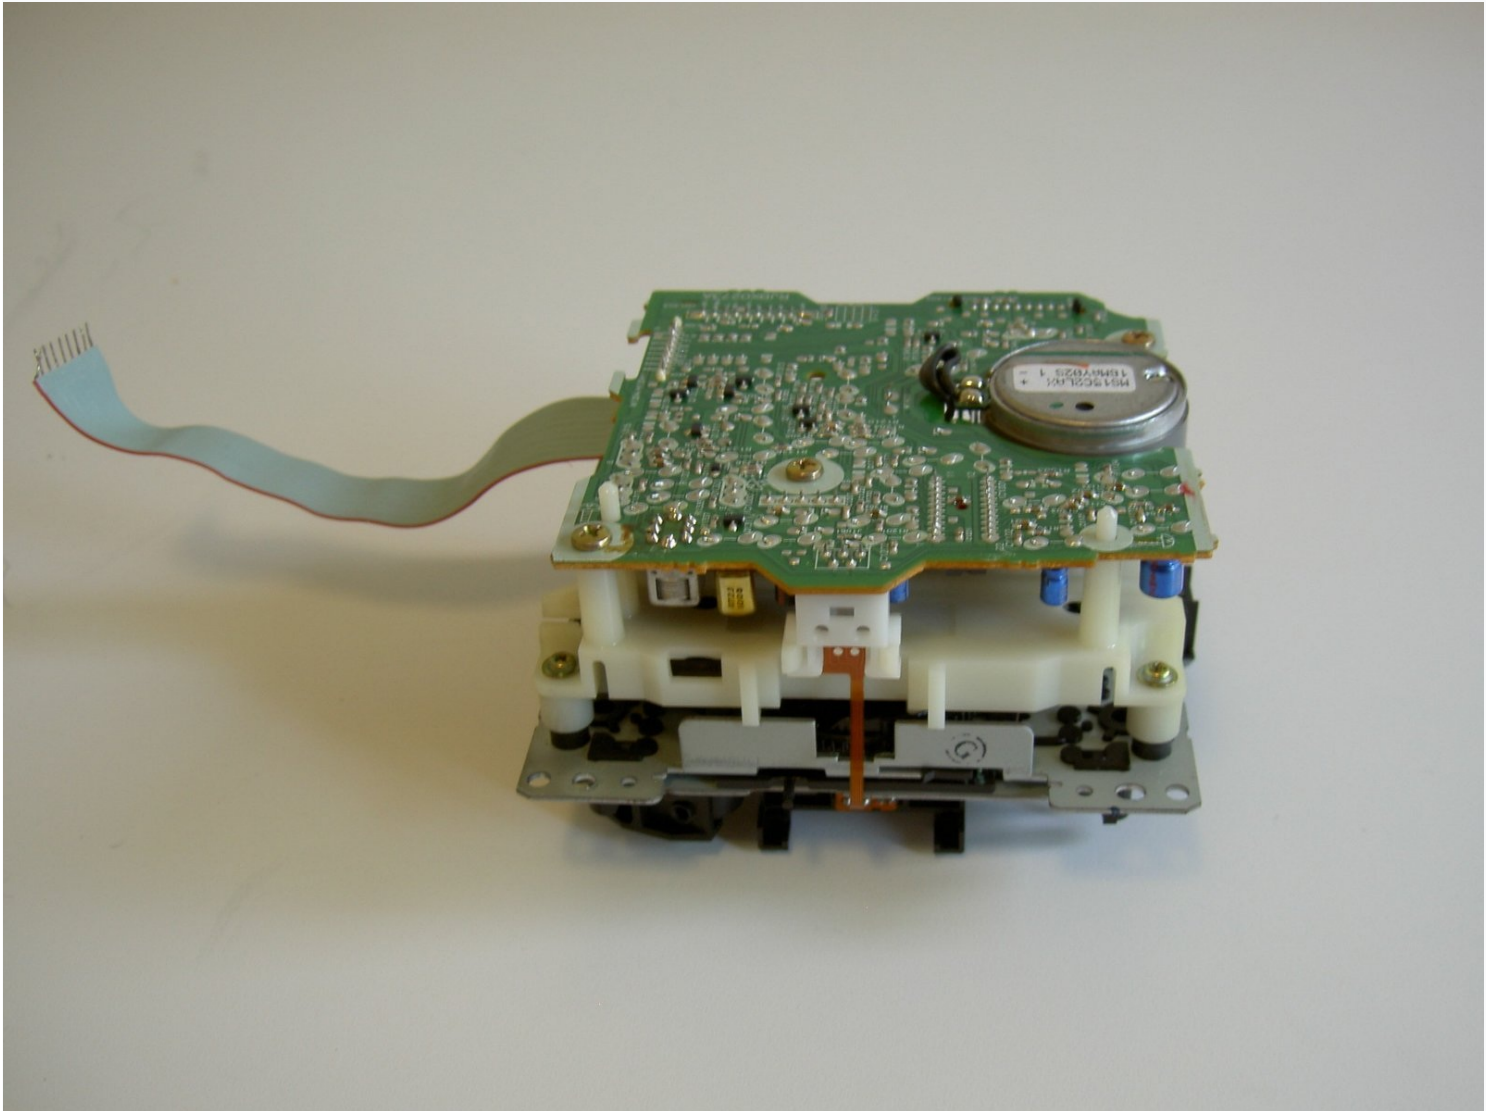

INTRODUCTION

This repair guide will show you how to replace the tape player unit of your Panasonic SA-PM17 by tearing down the device to the point where you can take the unit out and put a new one in.

TOOLS:

[Tweezers](#) (1)


[Phillips #0 Screwdriver](#) (1)

Step 1 — Tape Player Unit




- With a Phillips #0 screwdriver, remove the eight 9.5mm screws attached to the left and right panels of the device.

Step 2

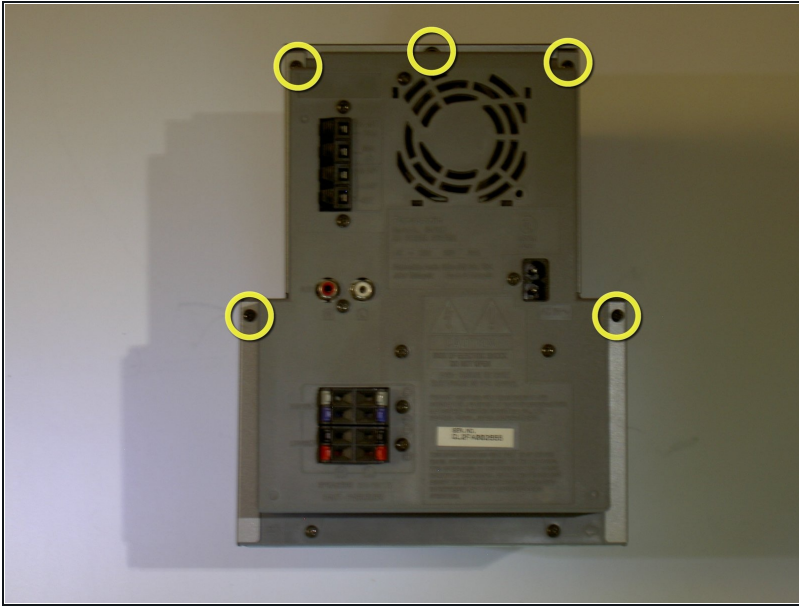

- With a Phillips #0 screwdriver, remove the five 11.5mm screws attached to the backside panel of the device.
- ⓘ Organize and label screws into a Ziploc bag for an easier reassemble process.

Step 3

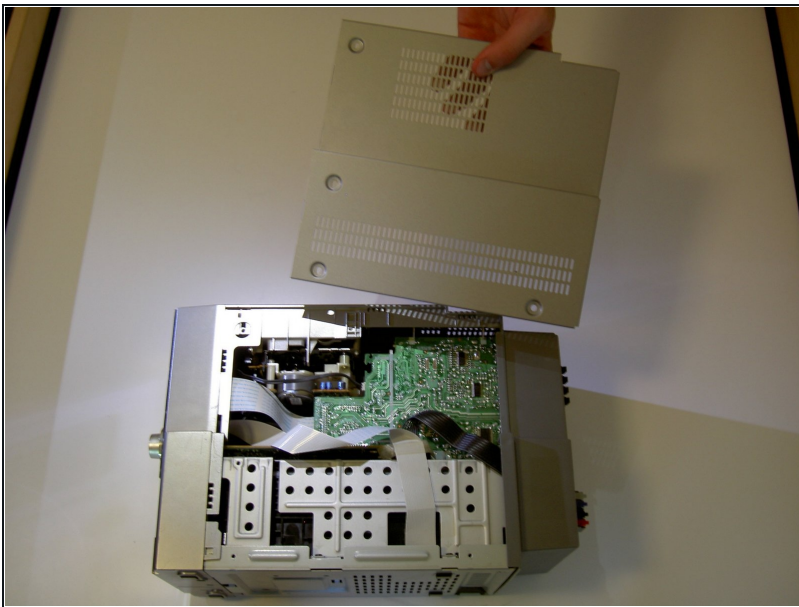

- Detach the right and left panels from the device.


Step 4



- Lift the top panel and gently place alongside the device.
- Allow the top panel to rest on the back without reattaching it.


⚠ CAUTION: Do not extend the top panel too far from the device due to the connected wires.

Step 5

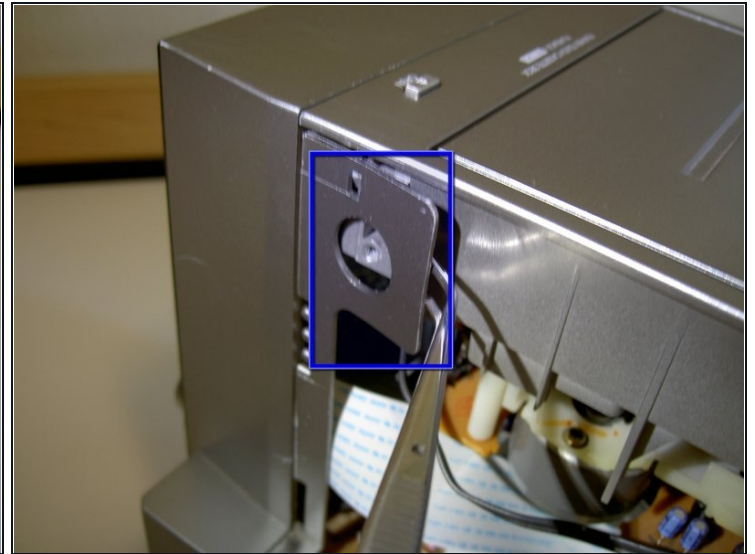

- With the tweezers, detach the indicated tabs from the hooks by lifting upward.
- ① Disconnecting the tabs will release a portion of the front panel connected to the entire device.

Step 6


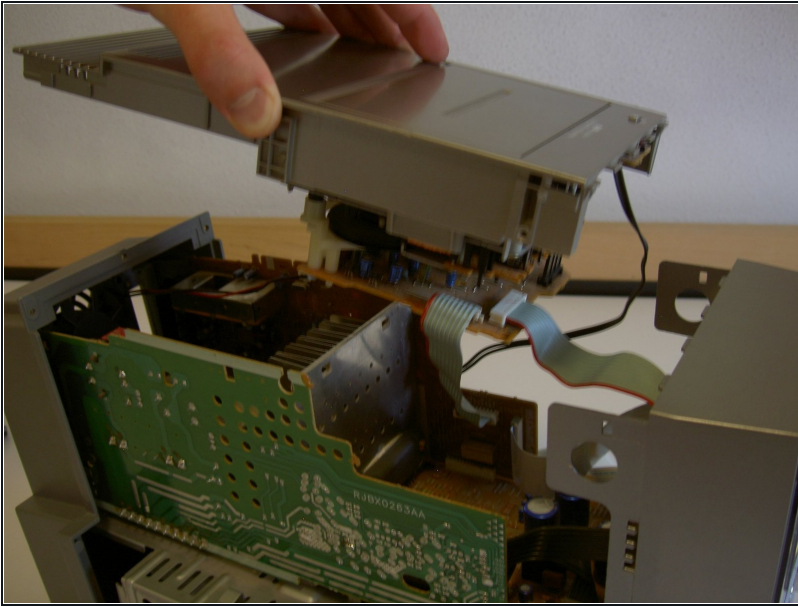


- Lift the top panel upward while firmly sliding it towards the back of the device.

⚠ CAUTION: Do not extend the top panel too far from the device due to the connected wires.




- ① The wires connected to the top panel will need to be disconnected in order to completely detach the panel.

Step 7

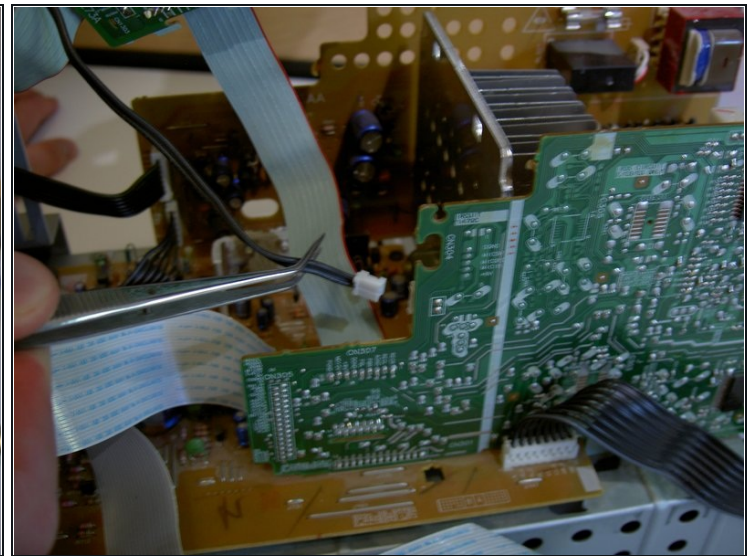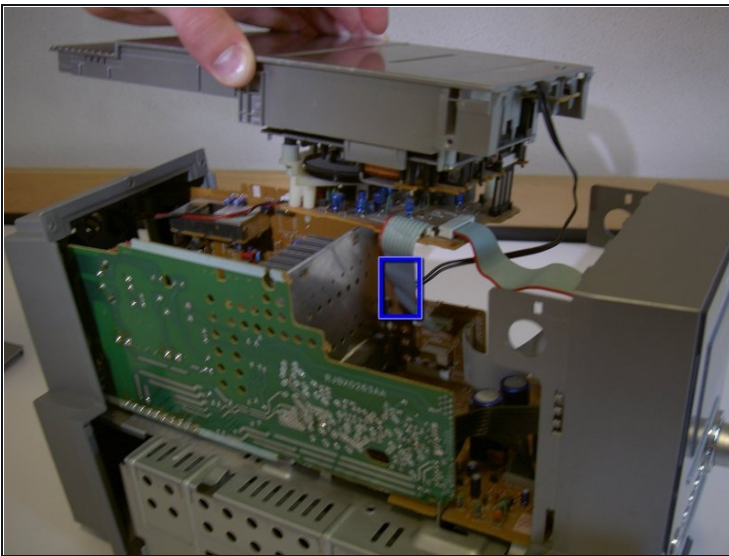




- Disconnect the black wire by gripping the wire at the base and pulling gently until released.

Step 8

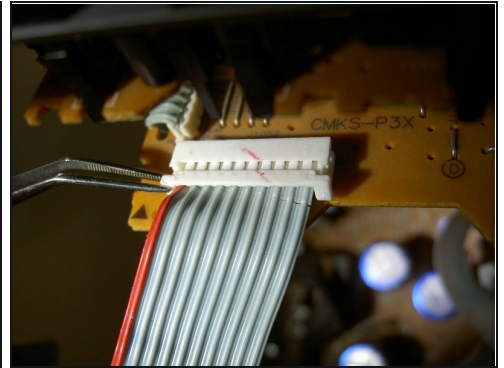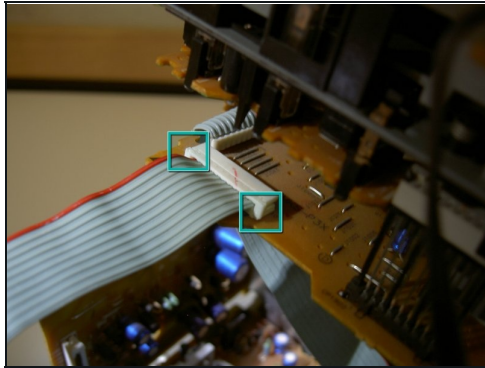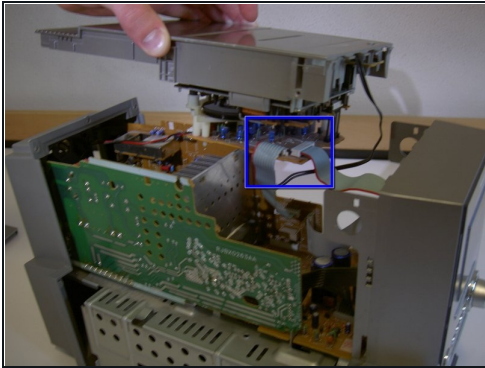



- This step deals with the indicated area of the device.
- Using the tweezers, detach the indicated tabs so that the cord may be released from the restraints.
- Gently pull on the cord, near its base, until it comes free of the restraint.

Step 9

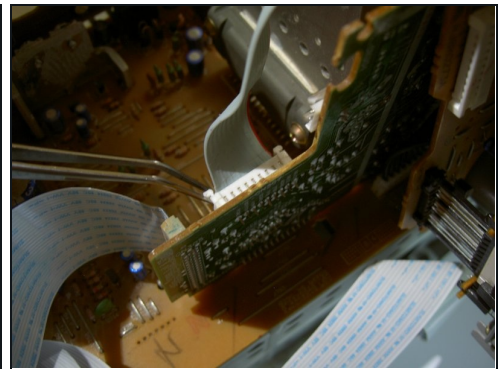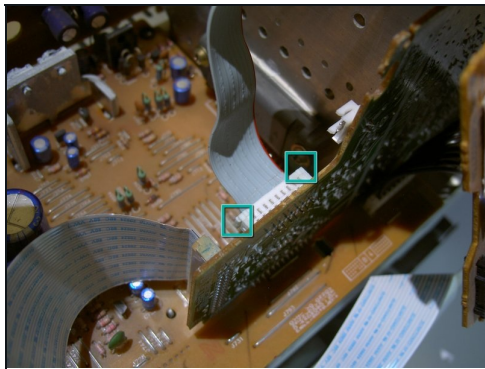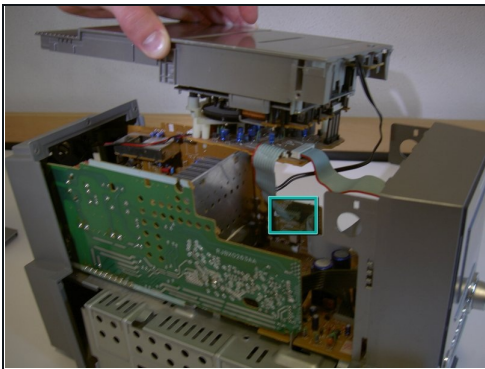


- This step deals with the indicated area of the device.
- Lift the indicated tabs out until the restraint looks like the final picture.
- Gently pull on the cord until it is released from the attachment.
- The top panel is now disconnected from the device.

Step 10

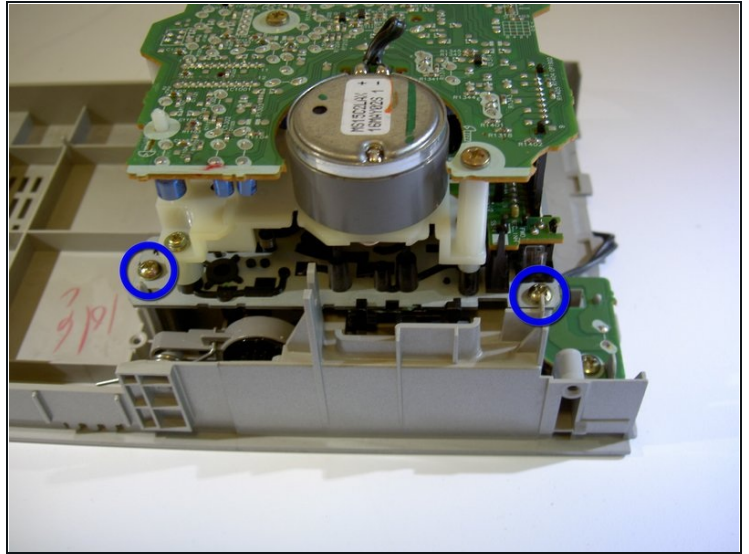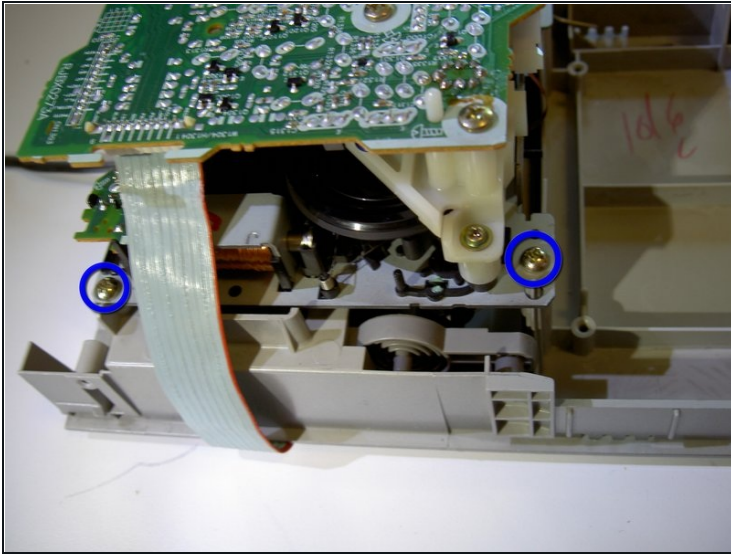

- Remove the four 12.1mm screws using a Phillips #0 screwdriver.
- ① Organize and label screws into a Ziploc bag for safe keeping and easier reassembling process.

Step 11

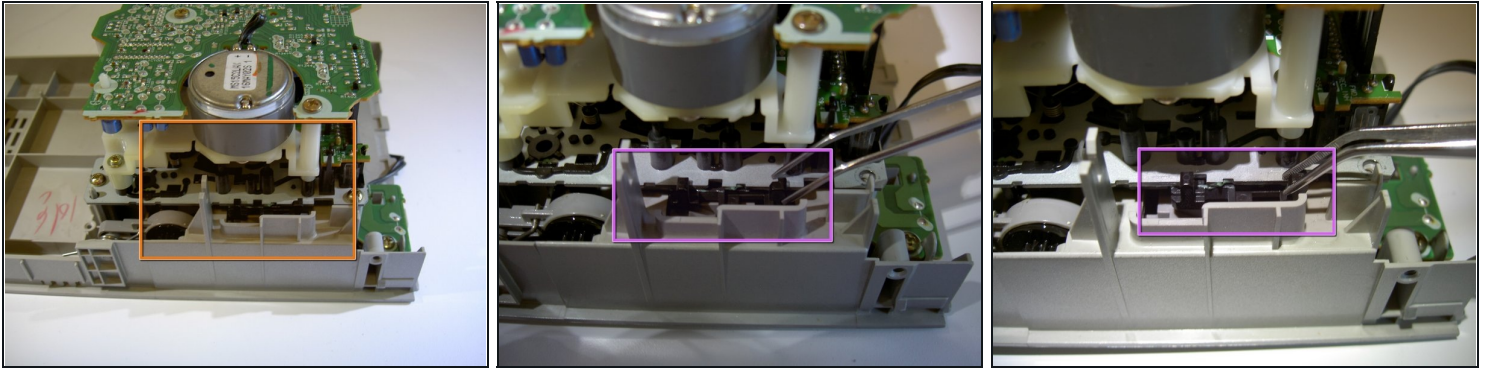

- This step deals with the indicated area.
- Using the tweezers, pull the indicated latch to the right to disconnect the tape player unit from the top of the device.
- While holding the latch to the right, lift the unit up from the plastic.

⚠ CAUTION: When the latch is disengaged, the tape cover may push out and force the rest of the apparatus to pop up. This is normal, but be careful that the tape cover does not pop out too quickly.

ⓘ NOTE: When placing this unit back on the device, you can simply push the unit into position. The latch will automatically snap into position.

To reassemble your device, follow these instructions in reverse order.